



ETEK Three Phase Storage Inverter with Four MPPT


ETH-25K-50KTL-HT

MAX 98.8% EFFICIENCY

IP65 PROTECTION



- Max. efficiency up to 98.8%
Max. 100A charge/discharge current
- Up to 110% phase unbalanced output available on both on-grid and back-up outputs.
- Parallel operation capacity support system size from KW to MW level
- Fast and easy data checking and commissioning via App or OLED display
- 135~750V wide battery connection range to store more energy and optimize self-sufficiency rate.
- Arbitrary phase of back-up output allows up to 125% overloading ability.
- Maximum 200% back-up output overloading @60s.
- Uninterruptible power supply, switch to off-grid mode within 20ms

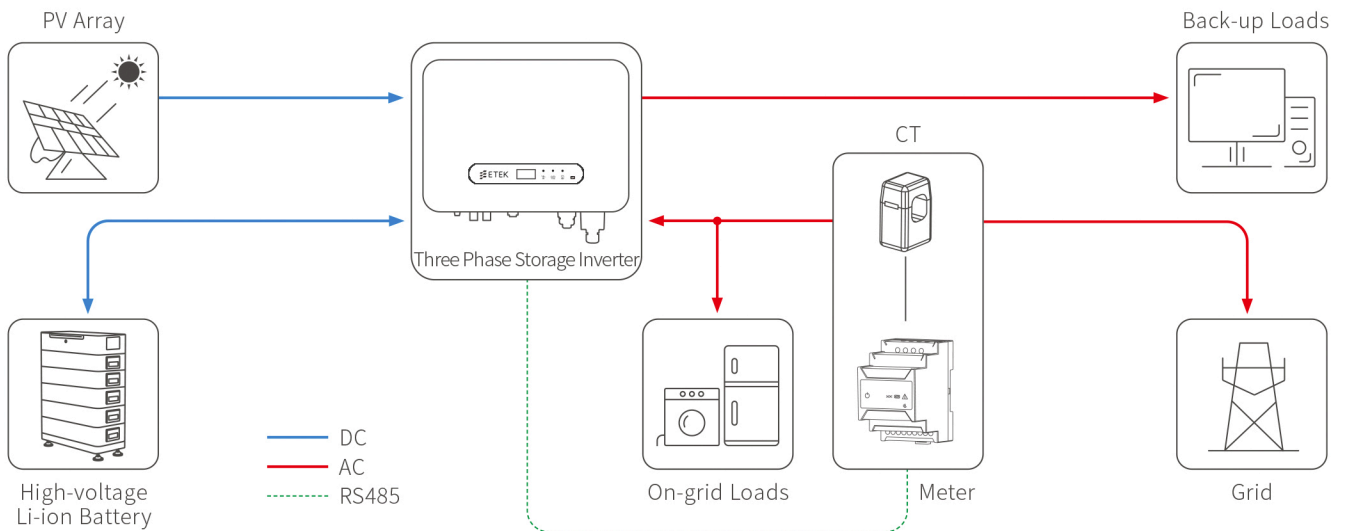

Type Designation	ETH-25KTL-HT	ETH-30KTL-HT	ETH-36KTL-HT	ETH-40KTL-HT	ETH-50KTL-HT
PV Input					
Max. Input Power (kW)	37.5	45.0	54.0	60.0	75.0
Start-up Voltage (V)	135	135	135	135	135
Max. DC Input Voltage (V)*	1000	1000	1000	1000	1000
Rated DC Input Voltage (V)	620	620	620	620	620
MPPT Voltage Range (V)	200-950	200-950	200-950	200-950	200-950
No. of MPP Trackers	4	4	4	4	4
No. of DC Inputs per MPPT	2	2	2	2	2
Max. Input Current (A)	30×4	30×4	30×4	30×4	30×4
Max. Short-circuit Current (A)	40×4	40×4	40×4	40×4	40×4
Battery Side					
Battery Type	Lithium Battery (with BMS)				
Battery Voltage Range (V)	135-750				
Max. Charge/Discharge Current (A)	100/100				
Grid Side					
Rated Output Power (kW)	25.0	30.0	36.0	40.0	50.0
Max. Output Apparent Power (kVA)	27.5	33.0/30.0 ¹⁾	39.6	44.0	55.0
Max. Input Apparent Power (kVA)**	30.0	36.0	43.5	48.0	60.0
Max. Charging Power of Battery (kW)	25.0	30.0	36.0	40.0	50.0
Rated AC Voltage (V)	3L/N/PE; 220/380V; 230/400V; 240/415V				
Rated AC Frequency (Hz)	50/60	50/60	50/60	50/60	50/60
Max. Output Current (A)	42.0	50.0/43.5 ²⁾	60.0	66.0	83.0
Power Factor	0.8 leading ... 0.8 lagging				
Max. Total Harmonic Distortion	<3% @Rated output power				
DCI	<0.5%In	<0.5%In	<0.5%In	<0.5%In	<0.5%In
Back-up Side					
Rated Output Power (kW)	25.0	30.0	36.0	40.0	50.0
Max. Output Apparent Power (kVA)	27.5	33.0	39.6	44.0	55.0
Max. Output Current (A)	42.0	50.0	60.0	66.0	83.0
UPS Switching Time	<20ms	<20ms	<20ms	<20ms	<20ms
Rated Output Voltage (V)	3/N/PE; 220/380V; 230/400V; 240/415V				
Rated Output Frequency (Hz)	50/60	50/60	50/60	50/60	50/60
Peak Output Apparent Power (kVA)***	30.0	36.0	43.5	48.0	60.0
Voltage Harmonic Distortion	<3% @Linear load				
Efficiency					
Max. Efficiency	98.8%	98.8%	98.8%	98.8%	98.8%
European Efficiency	98.3%	98.3%	98.3%	98.3%	98.3%
Compliance					
IEC/EN 62109, IEC/EN 61000, EN50549-1, TOR Generator Type A, VDE-AR-N-4105					

Protection	
DC Reverse Polarity Protection	Integrated
Battery Input Reverse Connection Protection	Integrated
Insulation Resistance Protection	Integrated
Surge Protection	Integrated
Over-temperature Protection	Integrated
Residual Current Protection	Integrated
Islanding Protection	Integrated (Frequency shift)
AC Over-voltage Protection	Integrated
Overload Protection	Integrated
AC Short-circuit Protection	Integrated

General Data	
Over Voltage Category	PV: II; Main: III
Dimensions (W×H×D mm)	760×490×290
Weight (KG)	56.0
Protection Degree	IP65
Standby Self-consumption (W)	<15
Topology	Transformerless
Operating Temperature Range (°C)	-30~60
Relative Humidity (%)	0-100
Operating Altitude (m)	3000 (>3000m derating)
Cooling	Smart Fan
Noise Level (dB)	<50
Display	OLED & LED
Communication	CAN, RS485, WiFi/LAN (Optional)

* Max. operating DC voltage is 950V, max. withstanding DC voltage is 1000V

** Max apparent power from the grid means the maximum power imported from the utility grid used to satisfy the backup loads and charge the battery

*** The output power will exceed the rated value only when the power in the PV array is sufficient, and the duration of the overload is related to the overload power

1) AS 4777.2: 30.0kVA; 2) AS 4777.2: 43.5A