




NESE 540-72MHT

FROM STRENGTH TO STRENGTH IN NATURE **MONO HALF-CELL BIFACIAL TRANSPARENT MOUDLE**
FROM CAMBODIA

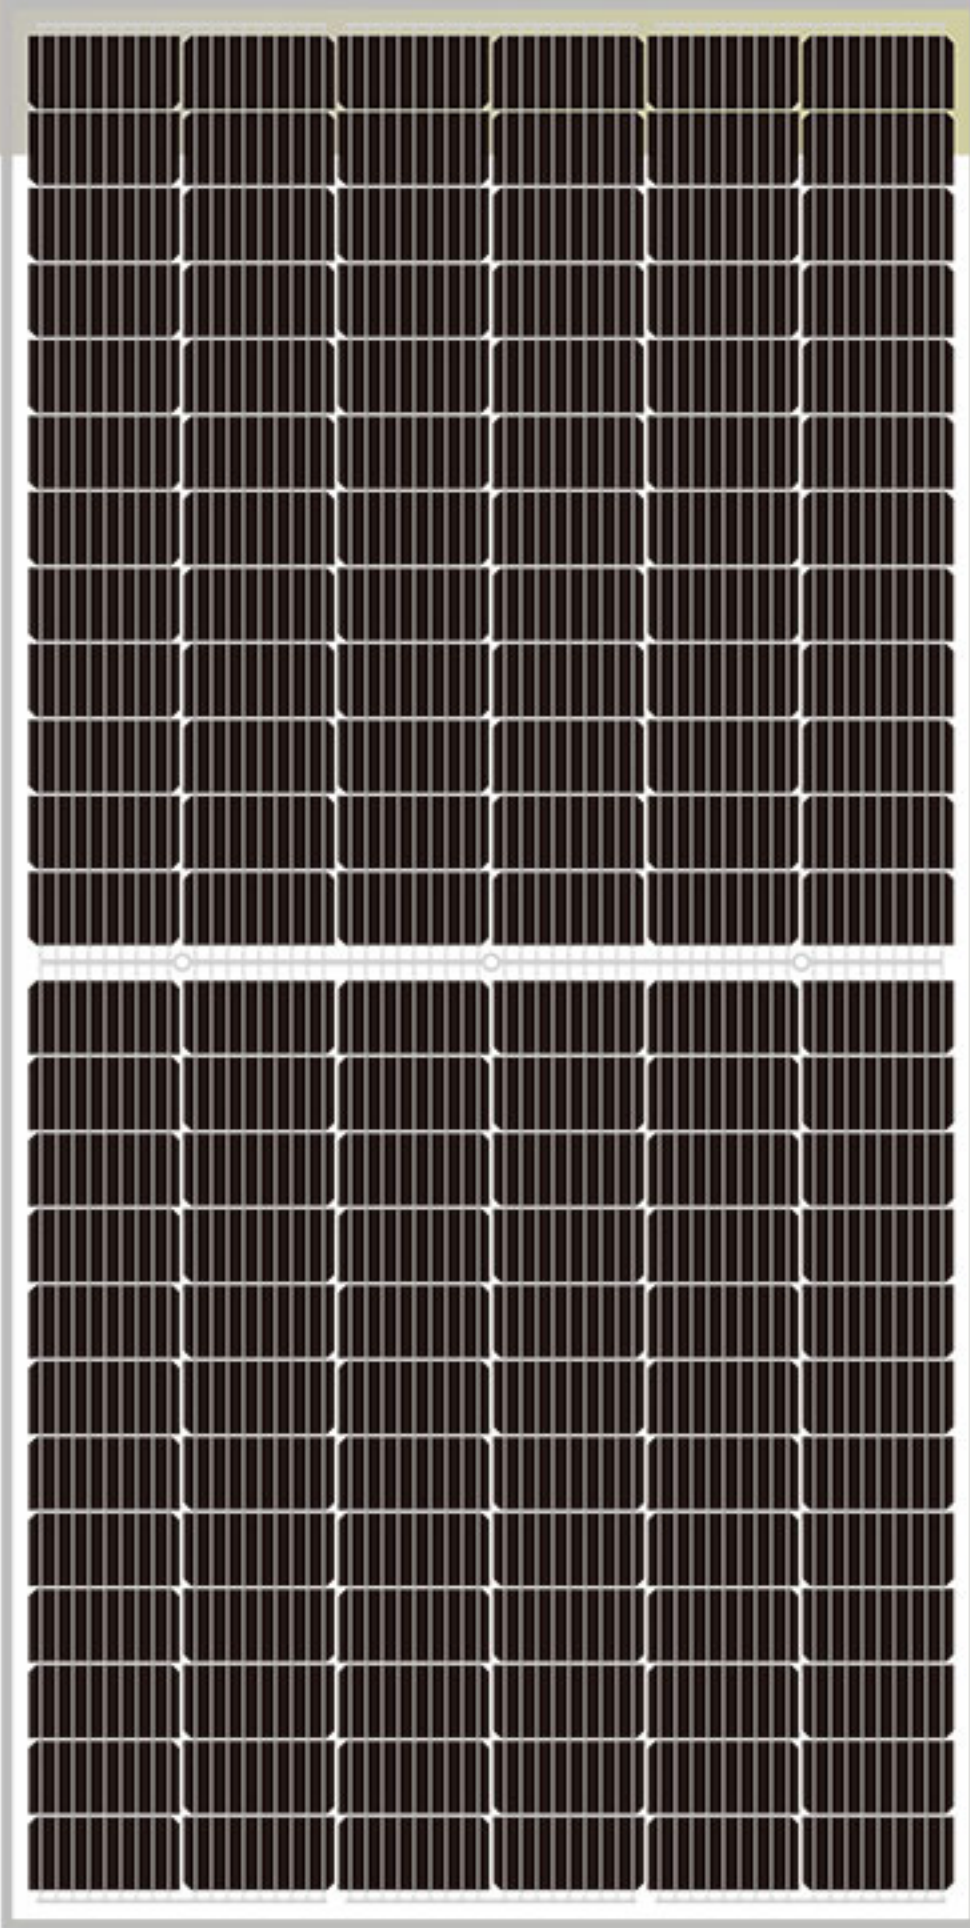

KEY FEATURES



High efficiency PERC

A high efficiency 182 (M10) PERC solar cell with 10 busbars technology to ensure the efficiency of the solar module up to 20.85% and stable operation.



Bifacial power generation

Increases 10-30% power generation revenue.



Excellent performance with weak light

More power output with a weak light condition-through advanced glass and solar cells.



Wind/Snow load

Wind load 2400 pa, snow load 5400 pa.



PID

Pid Free

Excellent Anti-PID performance, minimized the degradation of power.



Resistance of extreme environment conditions


High Salt Mist and Ammonia resistance certified by TUV.

INSURED BY

CHUBB® Munich RE

LINEAR PERFORMANCE WARRANTY

12 years product warranty. 25 years linear power warranty.

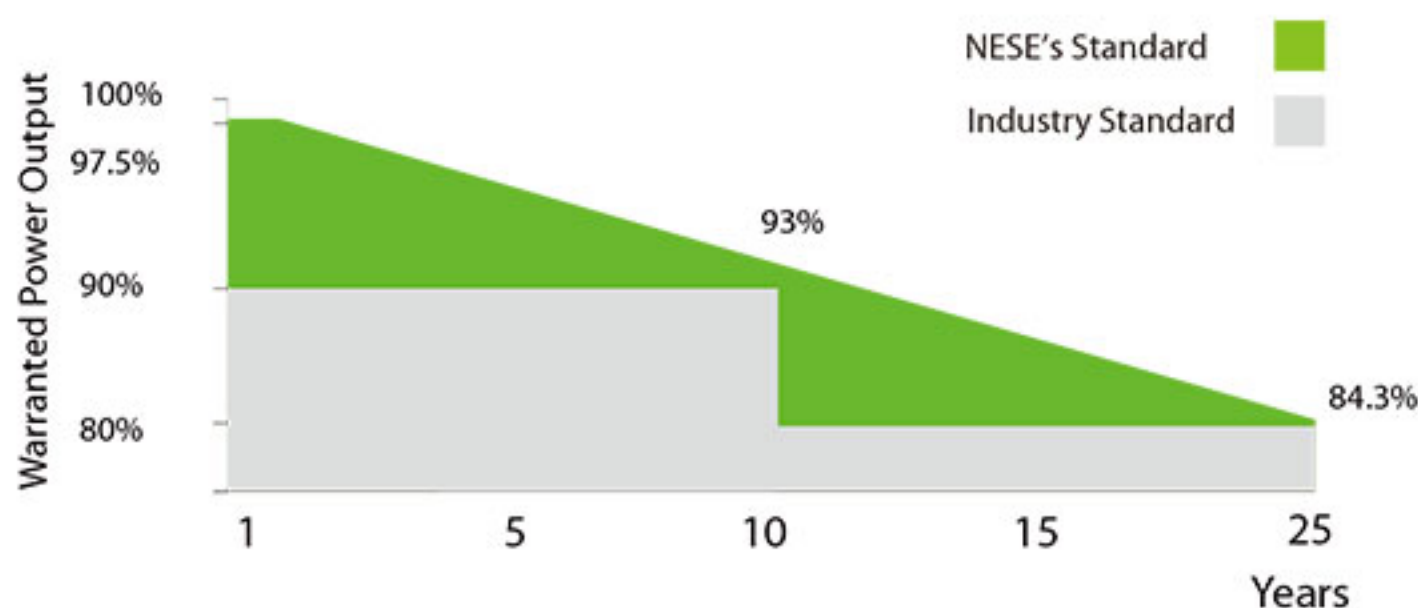

MANAGEMENT SYSTEM CERTIFICATES

ISO 9001:2015/QUALITY MANAGEMENT SYSTEM
ISO 14001:2015/STANDARDS FOR ENVIRONMENTAL MANAGEMENT SYSTEM

PRODUCT CERTIFICATES


IEC 61215/IEC 61730:VDE/CE/CEC AU
UL 61730: CSA




SPECIFICATIONS

Module type	NESE 520-72MHT		NESE 525-72MHT		NESE 530-72MHT		NESE535-72MHT		NESE540-72MHT	
	STC	(NOCT)	STC	(NOCT)	STC	(NOCT)	STC	(NOCT)	STC	(NOCT)
Maximum power(Pmax)	520Wp	389Wp	525Wp	393Wp	530Wp	397Wp	535Wp	400Wp	540Wp	404Wp
Maximum power voltage(Vmp)	40.7	37.6V	40.9V	37.8V	41.1V	38.0V	41.3V	38.1V	41.5V	38.3V
Maximum power current (Imp)	12.79A	10.34A	12.85A	10.40A	12.91A	10.45A	12.96A	10.50A	13.02A	10.55A
Open-circuit voltage(Voc)	49.0V	45.7V	49.2V	45.9V	49.4V	46.1V	49.6V	46.3V	49.8V	46.5V
Short-circuit current(Isc)	13.53A	10.93A	13.59A	10.98A	13.65A	11.02A	13.71A	11.07A	13.77A	11.12A
Module efficiency STC (%)	20.08%		20.27%		20.46%		20.66%		20.85%	
Operating temperature(°C)	-40°C ~ 85°C									
Maximum system voltage	1000/1500 VDC (IEC&UL)									
Maximum series fuse rating	20A									
Sorting power tolerance	0 ~ +3%									
Temperature coefficients of Pmax	-0.36%/°C									
Temperature coefficients of Voc	-0.29%/°C									
Temperature coefficients of Isc	+0.05%/°C									
Nominal operating cell temperature(NOCT)	44 ± 3°C									
Refer. Bifacial Factor	70 ±5%									

ENGINEERING DRAWING

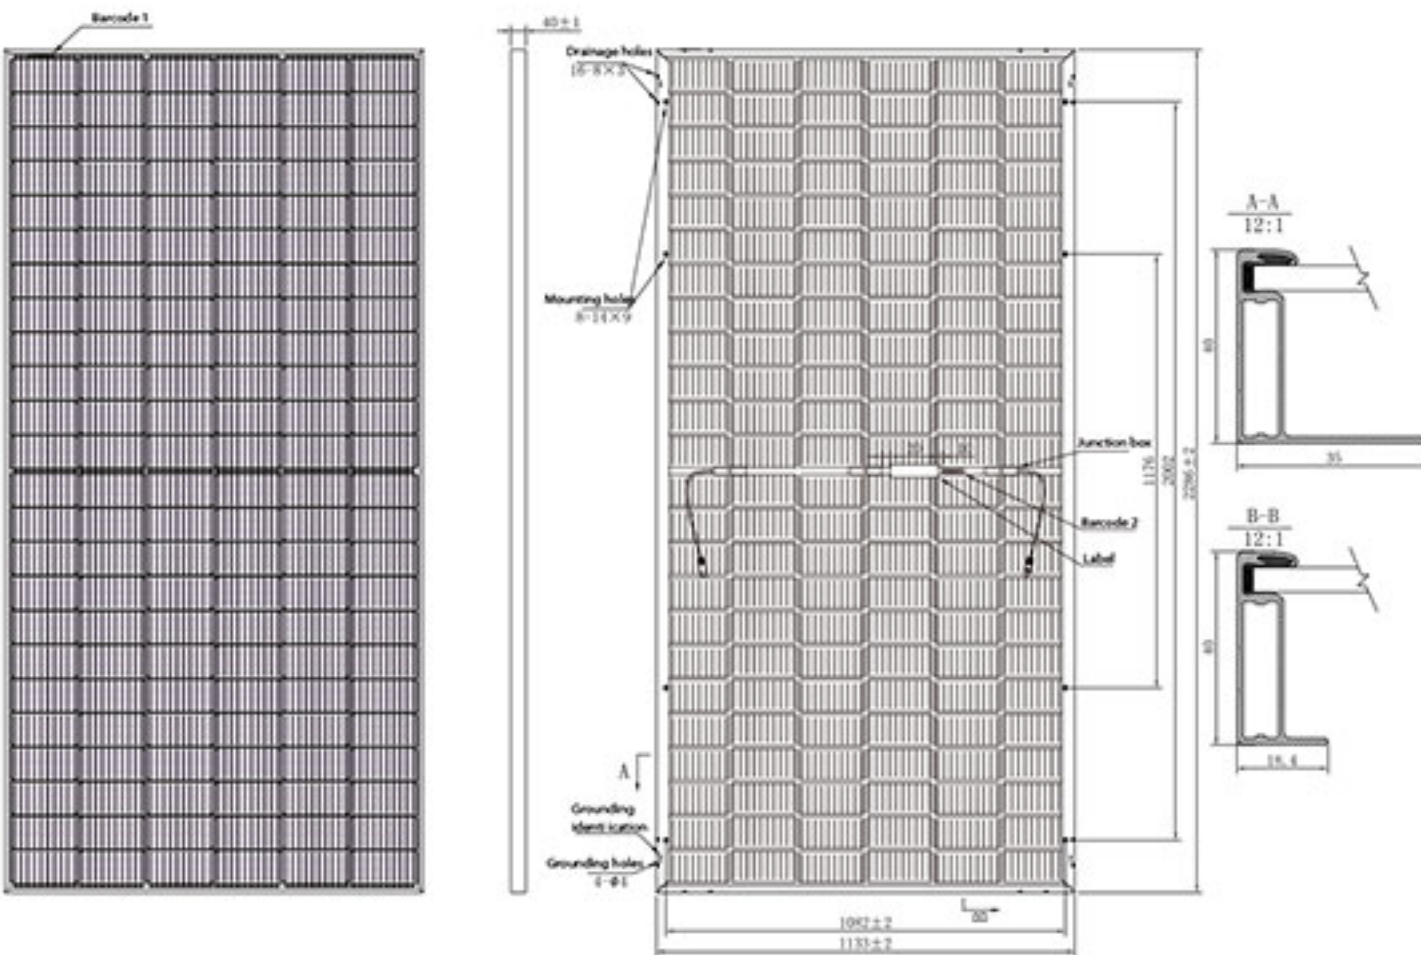

IV CURVES OF THE PV MODULES

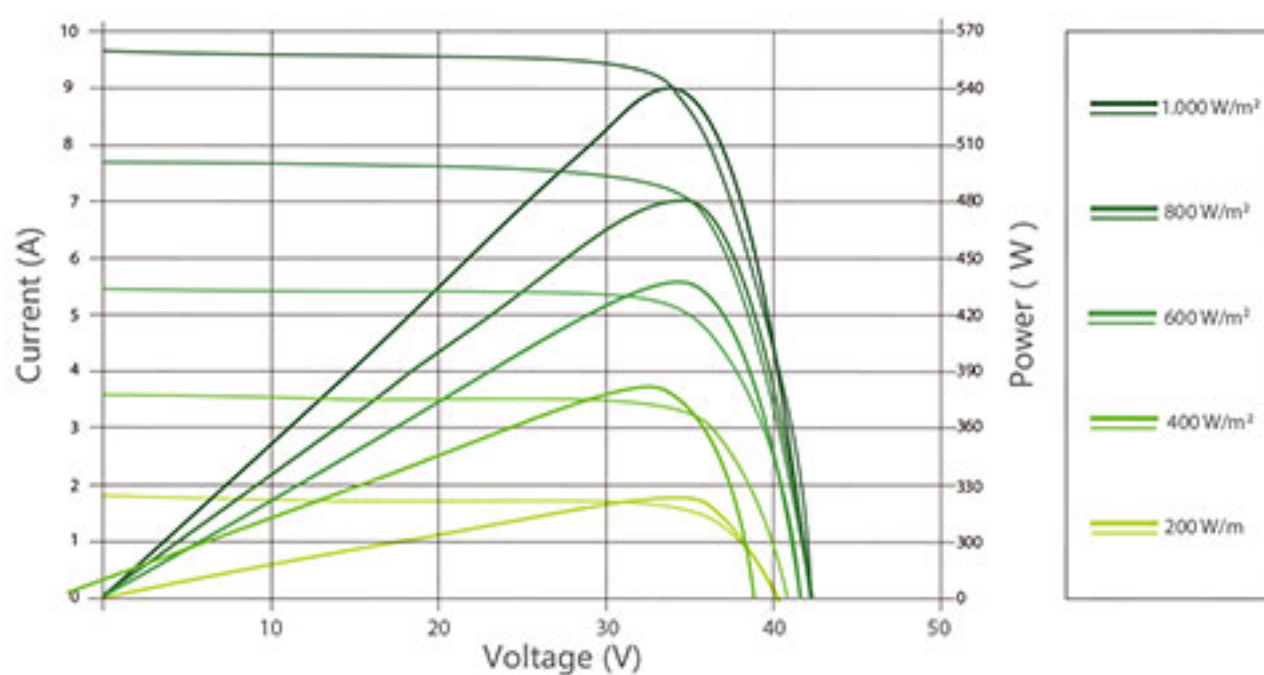

Electrical performance vs Incident Irradiance
Current-voltage & power-voltage curves (540W)

MATERIAL CHARACTERISTICS

Number of cell	144 (6 * 24)
Dimensions	2286*1133*40
Weight	29kg
Front glass	Tempered Glass 3.2 mm (AR-coating)
Frame	Anodized aluminium alloy
Junction box	Ip68 , 3 diodes
Output cables	12 awg, length: 350 mm (13.78inch) or Customized length
Connectors	MC4-Compatible

PACKAGING CONFIGURATION

20GP	155PCS
40GP	310PCS
40HQ	540PCS