



JUST FLOATER PRODUCT



Simple and Time Saving Installation



25 years working life
10 years warranty



Anti-salty and Corrosion



Wind resistance

High Efficient

- Customized design for project location
- Full automatic production line
- High performance ratio with water cooling low temperature

Reliable

- Anti-UV HDPE
- High wind speed protection
- Reliable Anchoring solution
- Tested in world wide lab

Simple & Fast

- Module Design for Fast installation
- Compatible for most solar module size
- Free of heavy machinery
- Easy Installation and Anchoring


Environmental Friendly

Drinking water Standard and Quality
Suitable for both salty and normal water
Less water evaporation




Technical Parameters

TYPE	Just-Float 2
LOCATION	Lake, Dam, Sea shore
Tilt Angle	5 ~12 degree
Wind Speed	Max 42m/s
Snow Load	Max 1kN/m ²
Module Size	Max (L=2.4m*W=1.4m)
Layout	Landscape, 1 / 2 / 3 / 4 rows per walkway
Floater material	HDPE
Fixture	AL6065/SUS304
Static Load	>100KG/m ²
Working Temp	-40° ~ 85°

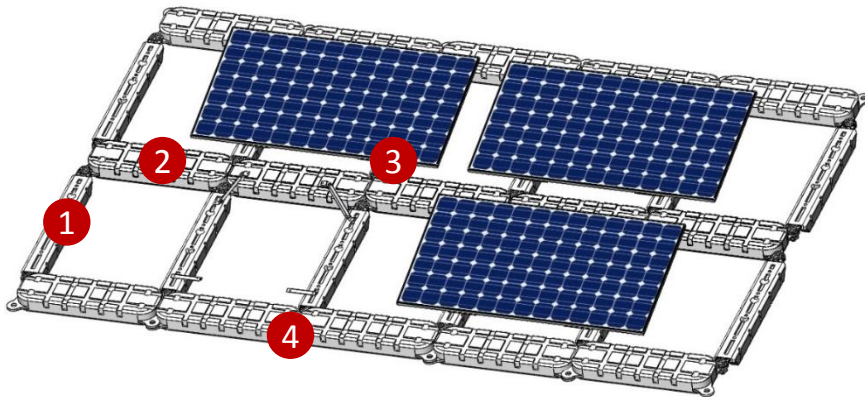

- 1、 FLOATER A
- 2、 FLOATER B
- 3、 MOUNTING PART
- 4、 SCREW & BOLTS

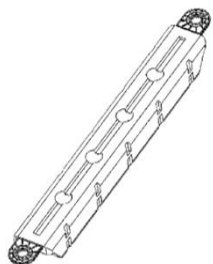


FLOATER A

Function: support solar panel and fixed

Material : HDPE with UV resistant and water safe

Dimension : 1480*200*150mm

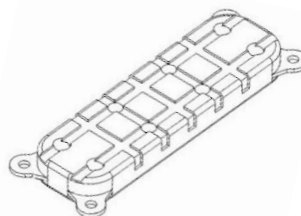

FLOATER B

Function: support solar panel and walkway

Material : HDPE with UV resistant and water safe

Dimension : 1250*400*150mm