




PV Module

- ET-M660BH330WW/WB 330W
- ET-M660BH335WW/WB 335W
- ET-M660BH340WW/WB 340W
- ET-M660BH345WW/WB 345W
- ET-M660BH350WW/WB 350W

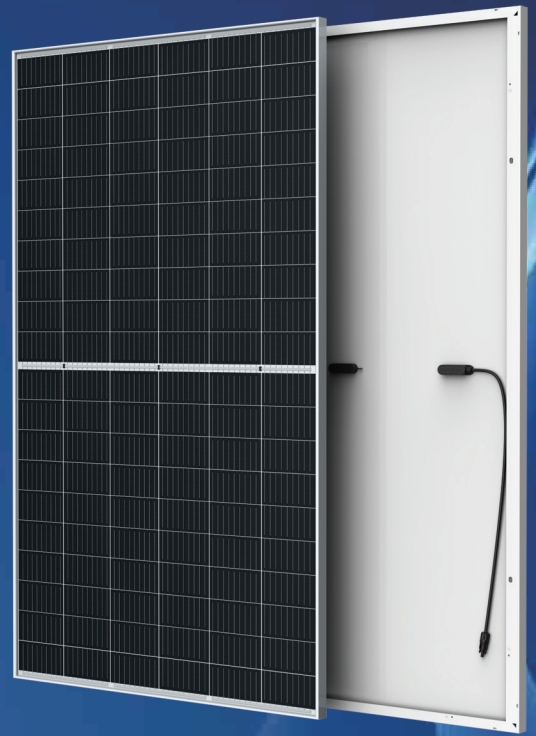

*5BB and MBB can be provided upon request.

1500

High Voltage
UL and IEC 1500V certified; lowers BOS costs and yields better L



High Efficiency
Higher module conversion efficiency benefit from half cell structure (low resistance characteristic).



PID Resistance
Excellent Anti-PID performance guarantee limited power degradation for mass production.



Low-light Performance
Advanced glass and cell surface textured design ensure excellent performance in low-light environment.




Severe Weather Resilience
Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Durability Against Extreme Environmental Conditions
High salt mist and ammonia resistance certified by TUV SUD.

WARRANTY

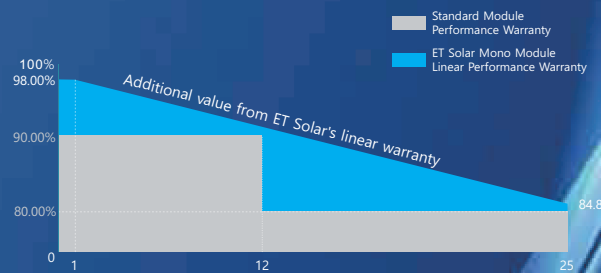

- 25 25-years Linear Performance Warranty
- 12 12-years Product Material & Workmanship
- 0.55 1st year ≤ 2%, 2nd~25th years ≤ 0.55% / year

IEC61215
IEC61730
UL61215
UL61730



Munich RE

ET SOLAR
support@etsolar.hk

ET Solar
M/ET-PD-EN-EU2022V2

ELECTRICAL SPECIFICATIONS

Model Type	ET-M660BH330WW	ET-M660BH335WW	ET-M660BH340WW	ET-M660BH345WW	ET-M660BH350WW
	ET-M660BH330WB	ET-M660BH335WB	ET-M660BH340WB	ET-M660BH345WB	ET-M660BH350WB
Peak Power (Pmax)	330W	335W	340W	345W	350W
Module Efficiency	19.6%	19.9%	20.1%	20.4%	20.7%
Maximum Power Voltage (Vmp)	34.40V	34.45V	34.50V	34.57V	34.75V
Maximum Power Current (Imp)	9.60A	9.72A	9.86A	9.98A	10.08A
Open Circuit Voltage (Voc)	41.30V	41.38V	41.43V	41.51V	41.59V
Short Circuit Current (Isc)	10.24A	10.31A	10.42A	10.52A	10.61A
Power Tolerance	0 to +4.99W				
Operating Temperature	- 40 ~ + 85°C				
Maximum System Voltage	DC 1500V				
Nominal Operating Cell Temperature	45±2°C				
Fire Performance	Class C(IEC)/Type 1(UL)				
Maximum Series Fuse Rating	20A				

ELECTRICAL SPECIFICATIONS (NOCT)


Model Type	ET-M660BH330WW	ET-M660BH335WW	ET-M660BH340WW	ET-M660BH345WW	ET-M660BH350WW
	ET-M660BH330WB	ET-M660BH335WB	ET-M660BH340WB	ET-M660BH345WB	ET-M660BH350WB
Peak Power (Pmax)	246W	250W	253W	256W	260W
Maximum Power Voltage (Vmp)	32.24V	32.49V	32.74V	32.99V	33.24V
Maximum Power Current (Imp)	7.63A	7.69A	7.74A	7.78A	7.83A
Open Circuit Voltage (Voc)	39.34V	39.58V	39.80V	40.02V	40.24V
Short Circuit Current (Isc)	8.11A	8.20A	8.26A	8.33A	8.40A

MECHANICAL SPECIFICATIONS

Cell Type	Mono-Crystalline, 158.75×79.38mm
Number of Cells	120pcs(2×(6×10))
Weight	18.5kg
Dimension	1684×1002×35 mm
Front Cover	3.2mm Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass Diodes
Cable Length (Including Connector)	4.0 mm ² (12AWG);Portrait:255mm(+)/355mm(-);Or customized
Connector	MC4 Compatible

PHYSICAL CHARACTERISTICS

Unit:mm (inch)

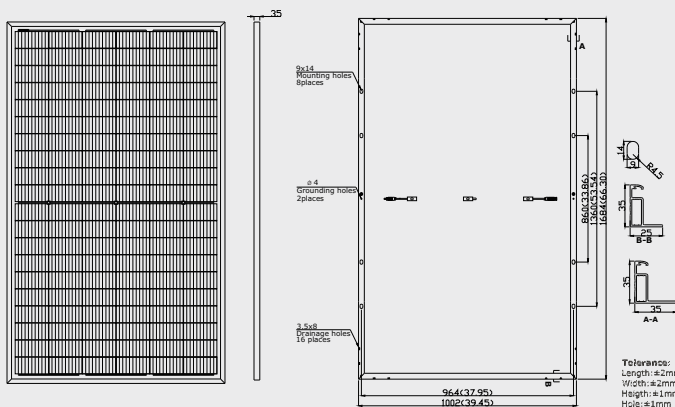

* The above drawing is a graphical representation of the product.
For engineering quality drawings please contact ET Solar.



TEMPERATURE COEFFICIENT

Temp. Coeff. of Isc (TK Isc)	0.054% /°C
Temp. Coeff. of Voc (TK Voc)	-0.263% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.338% /°C

PACKING MANNER

Container	40' HQ
Pieces per Pallet	31
Pieces per Container	871

ELECTRICAL CHARACTERISTICS



Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact support@etsolar.hk for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.