

100%—97.5%— Linear performance warranty from ET Solar Standard tiered warranty 90%— 90%— 80%— 90%— 1 5 10 15 20 25

25 25-year performance warranty

10 10-year warranty on materials and workmanship

We Make Solar Evolve

EIITE BLACK

Polycrystalline Module

ET-P672320BB 320W ET-P672315BB 315W FT-P672310BB 310W

Rich Product Portfolio & Innovative Product Strategy, satisfy customer needs to the best, and keep the customers' overall costs to the lowest.



High Conversion Efficiency

Industry-leading processing techniques realize great module efficiency to a maximum of 16.49%, steady power output guaranteed.



Anti-reflective Coating and Reduce O&M Costs
Easier to clean by rainwater to remove dirt on the glass surface,
making higher power output and lower maintenance costs.



0 to +5W Positive Tolerance Gain more power yields than expected.



Excellent Loading Capability 2400Pa wind loads, 5400Pa snow loads. Durable and long-lasting.



Top-quality & Trustworthy Product Rigorous Quality Management System built. Multiple internationally recognized PV industry standard certifications attained.















ELECTRICAL SPECIFICATIONS (STC)			
Model Type	ET-P672320BB	ET-P672315BB	ET-P672310BB
Peak Power (Pmax)	320W	315W	310W
Module Efficiency	16.49%	16.23%	15.98%
Maximum Power Voltage (Vmp)	37.13V	36.81V	36.54V
Maximum Power Current (Imp)	8.62A	8.56A	8.49A
Open Circuit Voltage (Voc)	45.94V	45.75V	45.65V
Short Circuit Current (Isc)	9.24A	9.12A	9.08A
Power Tolerance		0 to +5W	
Operating Temperature		- 40 ~ + 85°C	
Maximum System Voltage		DC 1000V	
Nominal Operating Cell Temperature		45±2℃	
Fire Safety		Class C	
Maximum Series Fuse Rating		20A	
ELECTRICAL SPECIFICATI	ONS (NOCT)		


Model Type	ET-P672320BB	ET-P672315BB	ET-P672310BB
Peak Power (Pmax)	237.3W	232.3W	229.7W
Maximum Power Voltage (Vmp)	34.1V	33.9V	33.7V
Maximum Power Current (Imp)	6.97A	6.85A	6.82A
Open Circuit Voltage (Voc)	42.5V	42.3V	42.3V
Short Circuit Current (Isc)	7.45A	7.35A	7.32A

MECHANICAL SPECIFICATIONS		
Cell Type	156.75 mm x 156.75 mm	
Number of Cells	72 cells in series	
Weight	25.7 kg (56.66 lbs)	
Dimension	1956×992×40mm (77.01×39.06×1.58 inch)	
Max Load	5400 Pascals (112 lb/ft²)	
Junction Box	≥IP67 rated	
Connector	MC4 Compatible	
Output cable	PV 1-F 4mm ²	

TEMPERATURE COEFFICIENT	
Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Tomp Cooff of Voc (TV Voc)	0 240/ 190


Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Temp. Coeff. of Voc (TK Voc)	-0.34% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.41% /°C


PACKING MANNER	
Container	40' HQ
Pieces per Pallet	26
Pieces per Container	572

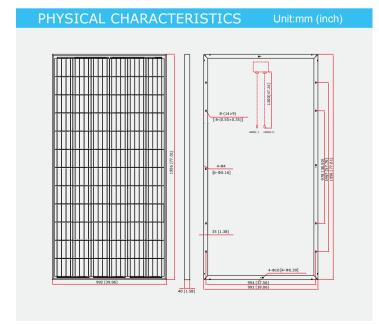


ELECTRICAL CHARACTERISTICS









Note: the specifications are obtained under the Standard Test Conditons (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.