



# LF415M10-54H

- LF395M10-54H
- LF400M10-54H
- LF405M10-54H
- LF410M10-54H

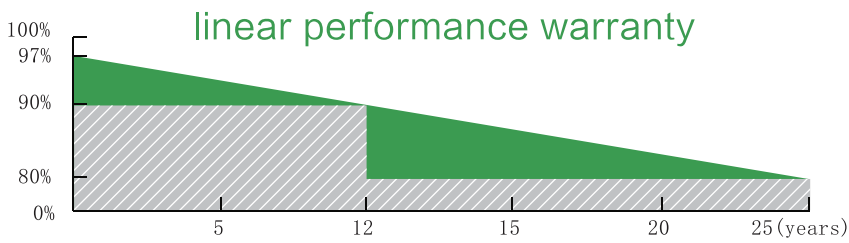

Ningbo Lefeng New Energy Co.,Ltd

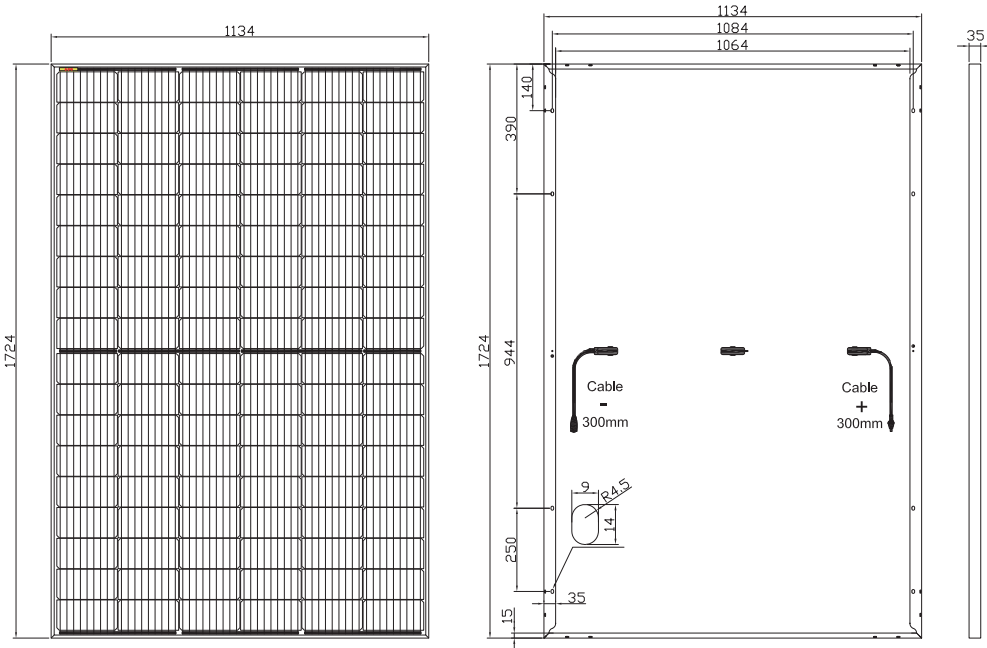

**12** Years  
Material & Craft  
Quality assurance

**25** Years  
80% output  
Power guarantee



ISO9001  
ISO14001  
OHSAS18001



High Module Efficiency



Mechanical Load  
Capability up to 5400 Pa



Salt Mist Corrosion Protect  
Ammonia Resistance



Potential Induced  
Degradation Free

Ningbo Lefeng New Energy Co.,Ltd

Tel: +86-0574-25709777

Tel: +86-0574-25758826

E-mail: Sales@lefnSolar.com

Add: No. 55 Haihe Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China



# LF415M10-54H

- LF395M10-54H
- LF400M10-54H
- LF405M10-54H
- LF410M10-54H



Ningbo Lefeng New Energy Co.,Ltd

## Electrical Characteristics

TYPE	LF395M10-54H	LF400M10-54H	LF405M10-54H	LF410M10-54H	LF415M10-54H
POWER OUTPUT	395	400	405	410	415
MAXPOWER TOLERANCE	0-5W	0-5W	0-5W	0-5W	0-5W
MODULE EFFICIENCY (%)	20.2	20.5	20.7	21.0	21.2
VOLTAGE MPP Vmpp	30.83	30.98	31.23	31.44	31.60
CURRENT MPP Impp (A)	12.81	12.91	12.97	13.04	13.13
VOLTAGE OPEN CIRCUIT Voc	36.92	37.10	37.33	37.58	37.77
SHORT CIRCUIT CURRENT Isc (A)	13.61	13.80	13.87	13.94	14.03
POWER OUTPUT	303.45	307.29	311.13	314.97	318.81
VOLTAGE MPP Vmpp (V)	28.10	28.25	28.46	28.66	28.81
CURRENT MPP Impp (A)	10.80	10.88	10.93	10.99	11.07
VOLTAGE OPEN CIRCUIT Voc (V)	34.08	34.25	34.46	34.69	34.87
SHORT CIRCUIT CURRENT Isc (A)	11.55	11.64	11.70	11.76	11.84
TEMPERATURE COEFFICIENTS Isc (% / °C)			0.046		
TEMPERATURE COEFFICIENTS Voc (% / °C)			-0.266		
TEMPERATURE COEFFICIENTS Pmpp (% / °C)			-0.354		
NOCT (°C)			45±2°C		

## Mechanical Data

DIMENSIONS OF MODULE	1724*1134*35mm
WEIGHT(Kg)	21.5
CABLE	4mm <sup>2</sup>
GLASS	High transmission glass 3.2mm
JUNCTION BOX	IP68, 3 Bypass-Diode, 300mm in length
TYPE OF CONNECTOR	Compatible with MC 4 plug

## Packaging Configuration


Loading Capacity	186 pcs/20GP
	806 pcs/40HC

## Contact Information

## Working Conditions

MAX SYSTEM VOLTAGE (VDC)	1500V
SERIES FUSE RATING	25A
MECHANICAL LOAD	5400Pa
OPERATING TEMPERATURE (°C)	-40~+85
APPLICATION CLASS	A

## I-V CURVES

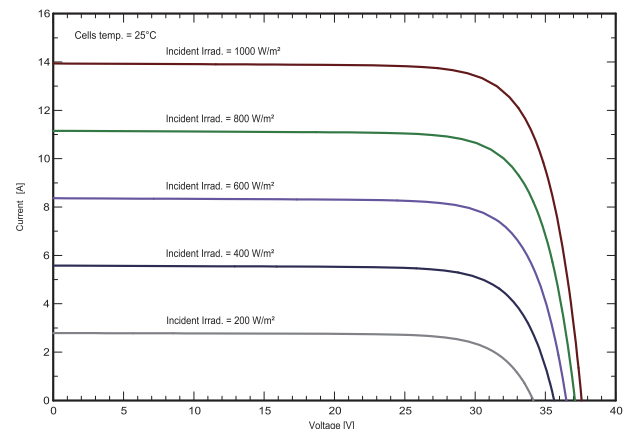

Ningbo Lefeng New Energy Co.,Ltd

Tel: +86-0574-25709777

Tel: +86-0574-25758826

E-mail: Sales@lefnosolar.com

Add: No. 55 Haihe Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China

