


# HT72-18X

NEW


POWER OUTPUT

**540W / 545W**  
**550W / 555W / 560W**

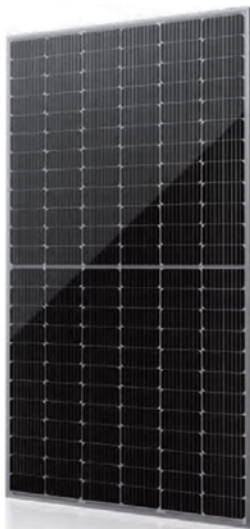

- Module Efficiency: 21.7%
- No. of Cells: 144 (6 × 24)
- Weight: 28.5kg
- Dimensions: 2279mm×1134mm×35mm

monocrystalline  
182 × 91mm

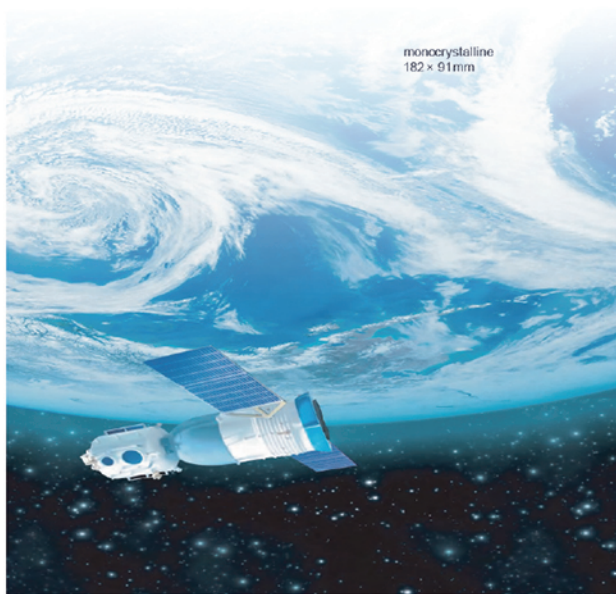

MULTIWAY

HIGHWAY Half-Cut

LIOTIMES CHINA OFFICE  
5th Floor, Block B Unisplendour Information Harbor,  
Langshan Road, Shenzhen, China  
Post Code: 518000  
+86-755-2691 9503  
admin@megmeet-hitech.com



Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.



The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption

12Ys  
Products  
Warranty



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs

25Ys  
Warranty on  
power output



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

EL

Microcrack resistant Double glass structure enhance reliability, triple EL tested of high quality control.

5W

Positive tolerance  
0/+5w guaranteed



Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa)

PID

PID Resistant

**Comprehensive and first-rate certification system**

IEC61215: 2016, IEC61730: 2016 Latest Standard  
ISO9001, ISO14001 and ISO45001,  
meeting the highest international standards  
Strict quality control



