

TWIN CELL SOLAR MODULES SERIES WITH

21% EFFICIENCY.

Now Available
Models Upto
600w+

Latest Technologies

TWIN CELL | PERC | MBB



DESIGNED TO MAXIMIZE POWER AND PERFORMANCE OVER GENERATIONS.


With this technology customer can boost their energy yield by generating the same power with fewer modules, or through generating higher system yield from the same surface area.

Twin cell series module are most effective and ideal choice where the space is limited and where the temperature are higher.




FLOW OF ELECTRICITY IN TWIN CELL SERIES SOLAR MODULES.

The twin sections reduce internal resistance and ensure continued production of energy when partially shaded.

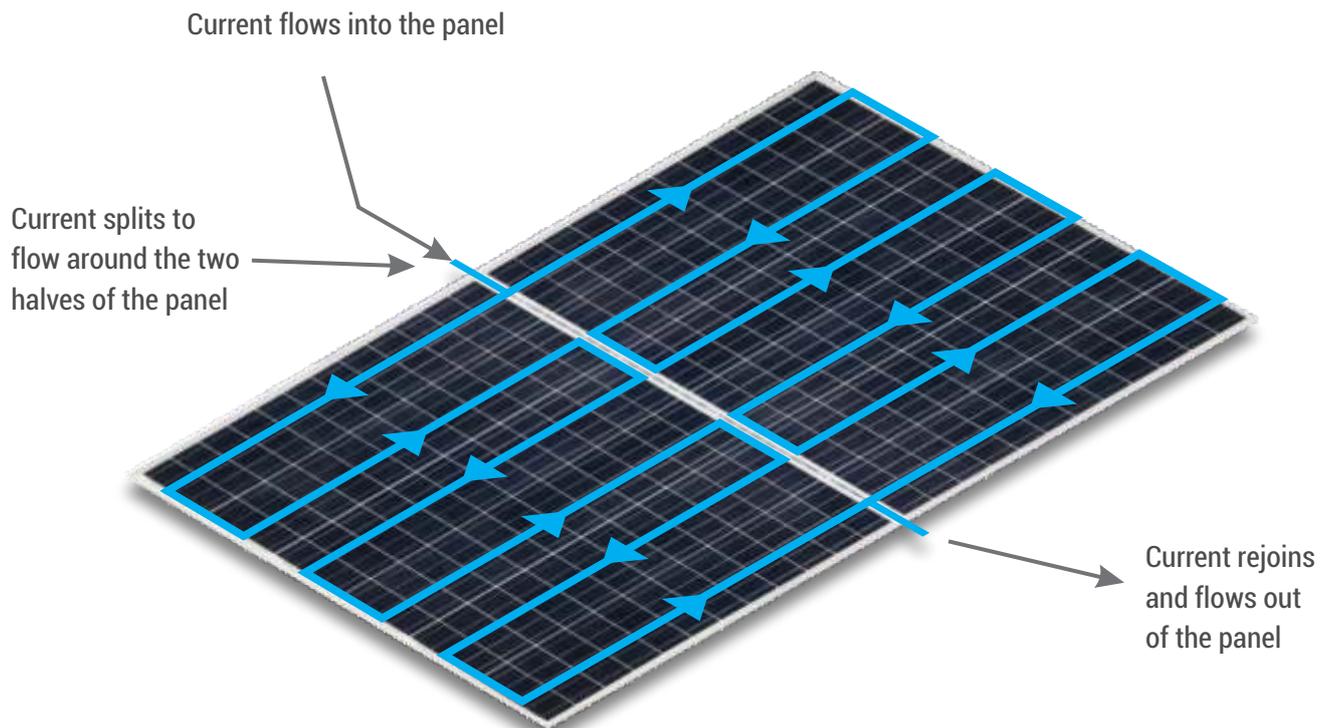


WITH MULTI-BUSBAR TECHNOLOGY (MBB)*

Our cell is equipped with a multi busbars.
It means our modules provide a higher reliability
and less internal cell resistance losses.

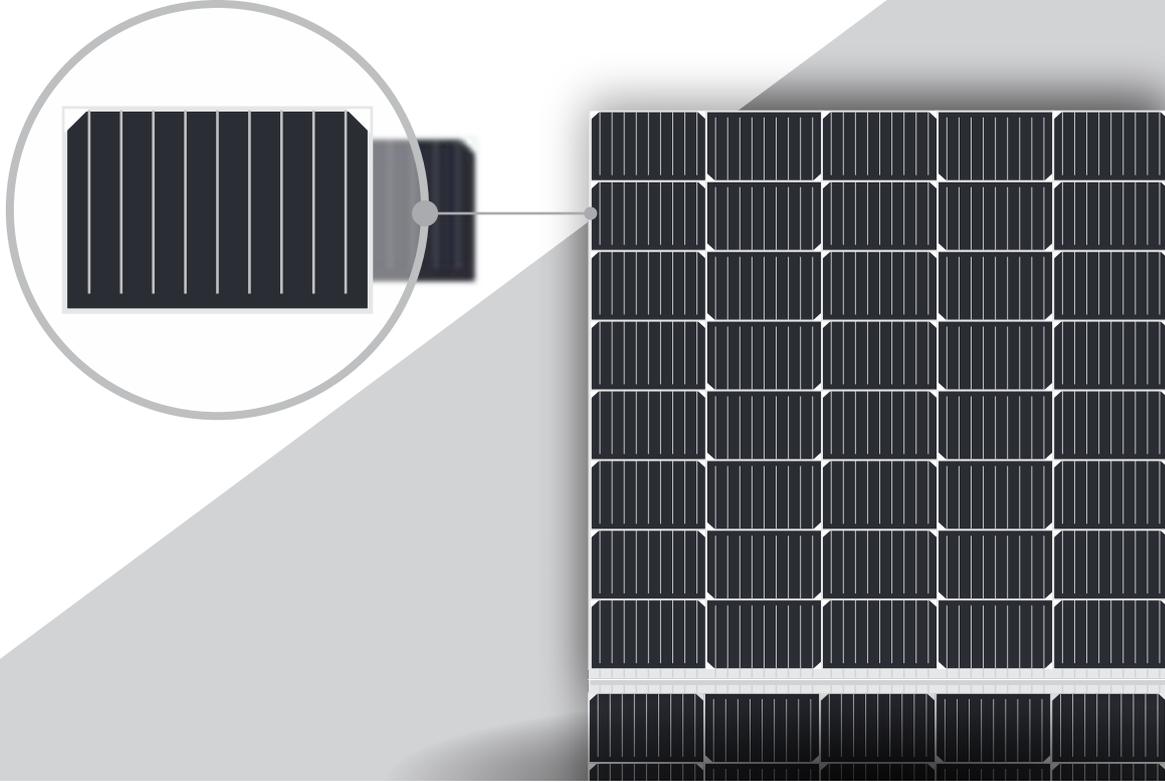

GENERATES MORE SOLAR POWER IN LESSER SPACE.

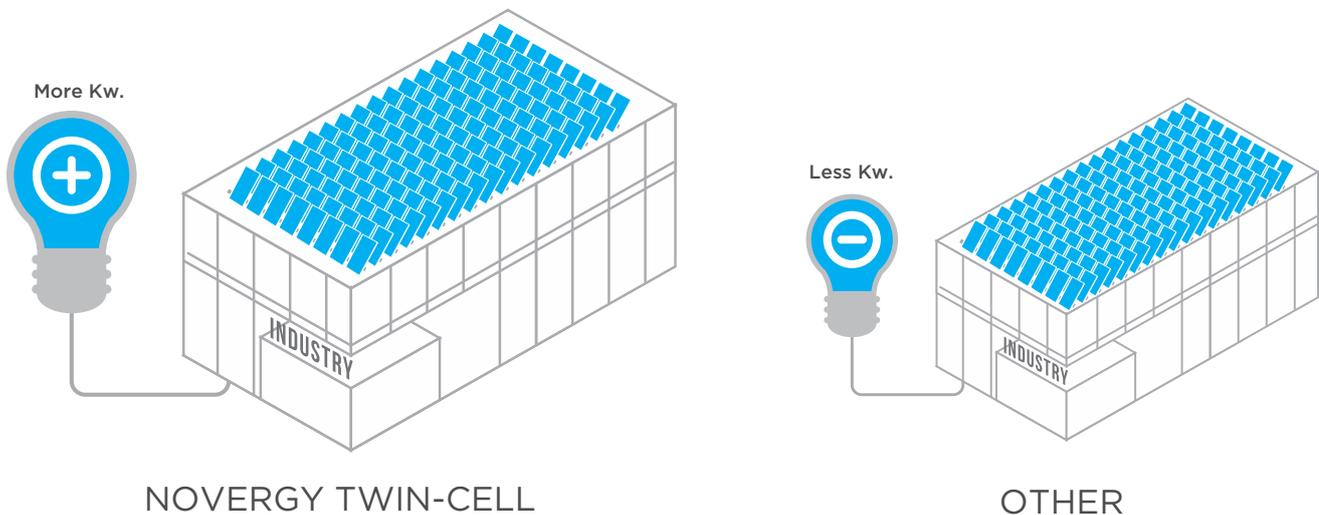

**On Select Models*

MORE POWER & MORE RELIABLE



Low power loss in cell connection



Better shading tolerance



Low NMOT: $42 \pm 3^{\circ}\text{C}$
Low Temperature Coefficient (Pmax): $-0.35\%/^{\circ}\text{C}$



Lower hot spot temperature




Heavy snow load up to 5400 pa,
wind load up to 3600 Pa*




Minimizes micro-cracks

PERC SOLAR CELL

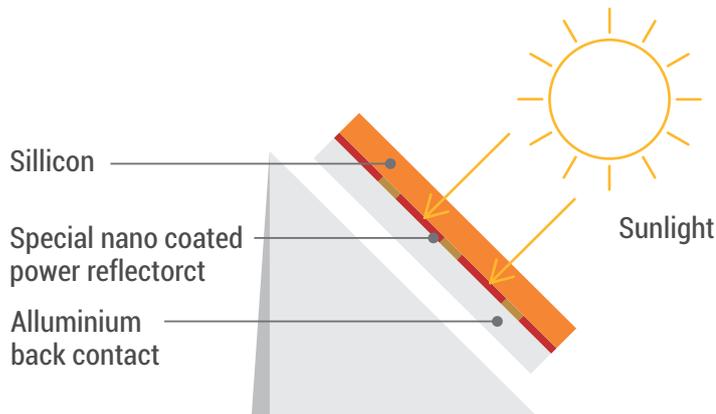


SPLIT JUNCTION BOX

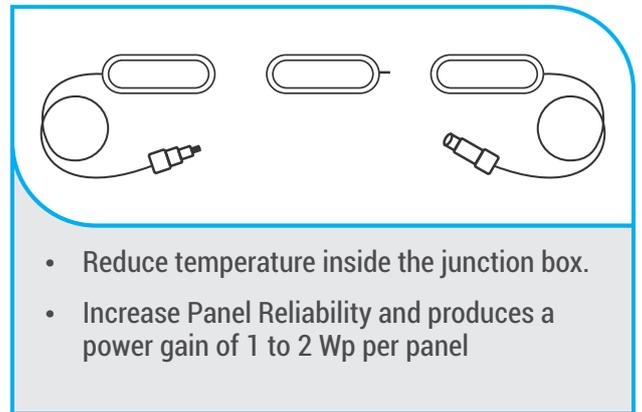

25 YEARS LINEAR WARRANTY

● Novergy linear performance warranty

● Standard Warranty

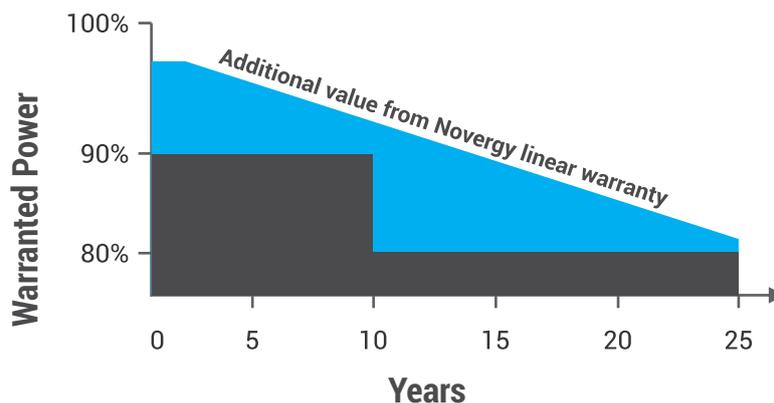

10 Years Product Warranty



POLY PERC TWIN CELL SERIES


(144 Twin Cell)

PCAL-TC-Series


(335 - 360 wp)

Model	PCAL-TC-335	PCAL-TC-340	PCAL-TC-345	PCAL-TC-350	PCAL-TC-355	PCAL-TC-360
Type of cells	Poly Crystalline PERC (157 mm)					
Numbers of cells	144 Twin Cell					
Wattage (Wp)	335	340	345	350	355	360
Voltage at max. power (Vmp)	38.20	38.40	38.60	39.20	39.40	39.60
Open circuit voltage (Voc)	45.70	45.90	46.10	46.60	46.80	47.00
Current at max. power (Imp)	8.77	8.86	8.94	8.94	9.02	9.10
Short circuit current (Isc)	9.28	9.36	9.44	9.51	9.58	9.66
Frame	Anodized Aluminium Alloy					
Front Glass	Tempered 3.2 mm (Low iron solar glass)					
Junction Box	IP 68					
Solar Cable	4 mm ²					
Solar Connector	MC 4 Compatible					
Number of Diode	3 / 6					
Dimensions (mm)	1997 x 992 x 35					
Max series fuse rating	20 A					
Weight (kg)	22.5					
Operating temprature(Deg. C)	-40 Deg C to + 85 Deg C					
Application Class	Class A					
Maximum System Voltage	1000 VDC					
Temp. coefficient's	Power=0.35% / Deg. C Voltage= - 0.31% / Deg. C Current=+0.05% / Deg. C					
NOCT	45 +/- 3 Deg. C					
Maximum Load	5400 Pa					


Rear View

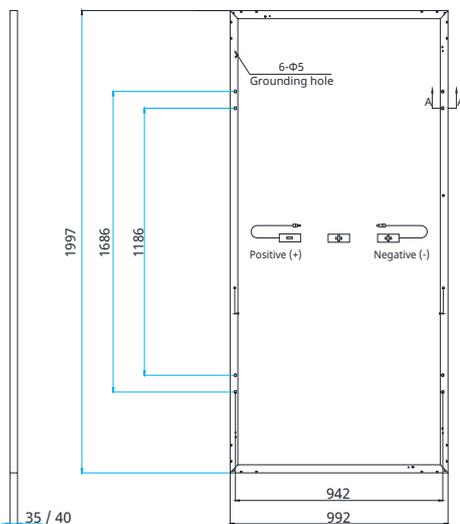


Frame Cross Section A-A




Mounting Hole



Current (A)

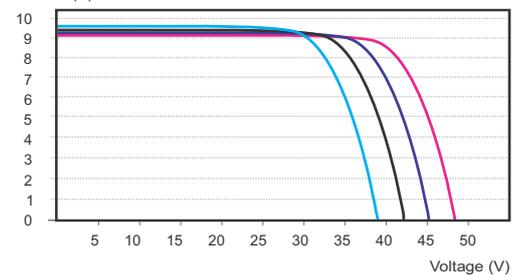

Current (A)

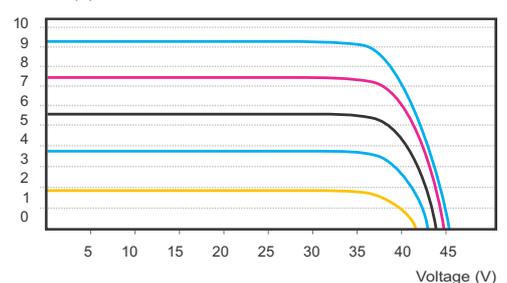

Specifications are subject to change without prior notice.

**To Get more Power and Greater Returns,
Contact Novergy Today!**

Write to enquiry@novergy.net
Visit us at novergysolar.com