We Make Solar Evolve

EliTe BLACK

Monocrystalline Module

ET-M672340BB 340W
ET-M672335BB 335W
ET-M672330BB 330W
ET-M672325BB 325W
ET-M672320BB 320W

Rich Product Portfolio & Innovative Product Strategy, satisfy customer needs to the best, and keep the customers' overall costs to the lowest.

High Conversion Efficiency
Industry-leading processing techniques realize great module efficiency to a maximum of 17.52%, steady power output guaranteed.

Anti-reflective Coating and Reduce O&M Costs
Easier to clean by rainwater to remove dirt on the glass surface, making higher power output and lower maintenance costs.

0 to +5W Positive Tolerance
Gain more power yields than expected.

Excellent Loading Capability
2400Pa wind loads, 5400Pa snow loads.
Durable and long-lasting.

Top-quality & Trustworthy Product
Rigorous Quality Management System built.
Multiple internationally recognized PV industry standard certifications attained.

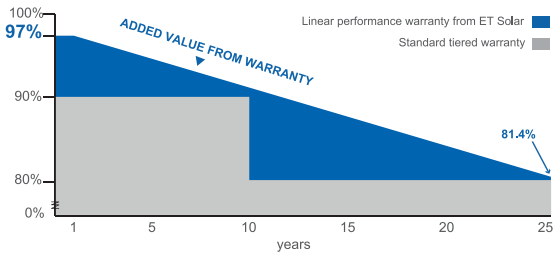

25 — 25-year performance warranty

10 — 10-year warranty on materials and workmanship

IEC 61215 Ed.2
IEC 61730
UL 1703

CONFORMS TO UL STD. 1703
CERTIFIED TO UL/CORD STD.C 1703-01

BABT8510

Towards Excellence

www.etsolar.com

M/ET-PD-EN-WW2016V3

ELECTRICAL SPECIFICATIONS

Model Type	ET-M672340BB	ET-M672335BB	ET-M672330BB	ET-M672325BB	ET-M672320BB
Peak Power (Pmax)	340W	335W	330W	325W	320W
Module Efficiency	17.52%	17.26%	17.01%	16.75%	16.49%
Maximum Power Voltage (Vmp)	38.17V	37.94V	37.55V	37.11V	37.00V
Maximum Power Current (Imp)	8.91A	8.83A	8.79A	8.76A	8.65A
Open Circuit Voltage (Voc)	46.91V	46.75V	46.64V	46.54V	46.31V
Short Circuit Current (Isc)	9.41A	9.33A	9.29A	9.11A	9.08A
Power Tolerance	0 to +5W				
Operating Temperature	- 40 ~ + 85℃				
Maximum System Voltage	DC 1000V				
Nominal Operating Cell Temperature	44.4±2℃				
Fire Safety	Class C(IEC) / Type 1(UL)				
Maximum Series Fuse Rating	20A(IEC) / 15A(UL)				

MECHANICAL SPECIFICATIONS

Cell Type	156.75mm x 156.75mm
Number of Cells	72 cells in series
Weight	25.7 kg (56.66 lbs)
Dimension	1956×992×40mm (77.01×39.06×1.58 inch)
Max Load	5400 Pascals (112 lb/ft^2)
Junction Box	IP67 rated
Connector	MC4 Compatible
Output cable	4mm^2(IEC) / 12AWG:PV Wire(UL)

TEMPERATURE COEFFICIENT

Temp. Coeff. of Isc (TK Isc)	0.06% /℃
Temp. Coeff. of Voc (TK Voc)	-0.30% /℃
Temp. Coeff. of Pmax (TK Pmax)	-0.43% /℃

PACKING MANNER

Container	40' HQ
Pieces per Pallet	26
Pieces per Container	572

PHYSICAL CHARACTERISTICS

Unit:mm (inch)

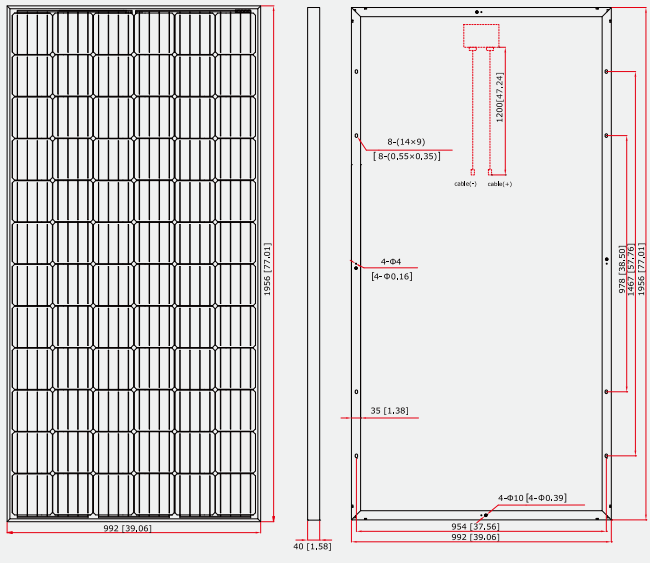

ELECTRICAL CHARACTERISTICS

Temperature Dependence of Isc, Voc and Pmax



Irradiance Dependence of Isc, Voc and Pmax

(AM1.5,Cell Temperature 25℃)



Note: the specifications are obtained under the Standard Test Conditons (STCs): 1000 W/m^2 solar irradiance, 1.5 Air Mass, and cell temperature of 25℃. The NOCT is obtained under the Test Conditions: 800 W/m^2, 20℃ ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact ***support@etsolar.com*** for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.