


### Solar Panel, Solar Modules, Monocrystalline Module, PV Modules

- PVSK-645M**    **PVSK-650M**
- PVSK-655M**    **PVSK-660M**
- PVSK-665M**    **PVSK-670M**
- PVSK-675M**

Explain Model No	Product name	Solar cell number	Solar Cell Type	Wattage	Silicon Type
	PVSK-670W	132PCS	210 x 210mm	670W	M:Monocrystalline

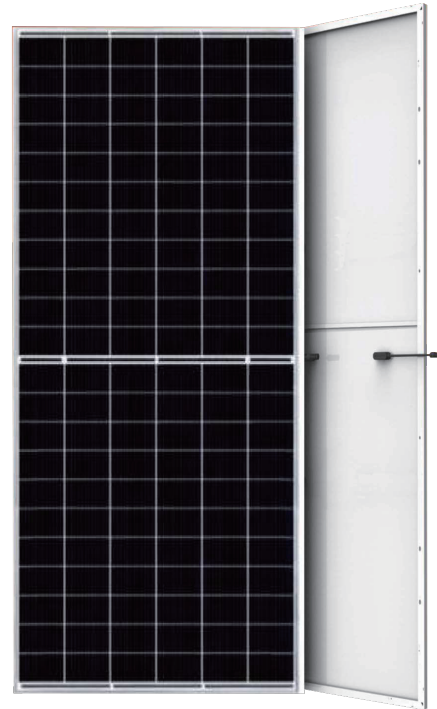

**675W**  
Maximum Power Output

**21.7%**  
Maximum Module Efficiency

**0~+5W**  
Power Output Guarantee

#### Cell Type



12BB(210mm)



Ideal choice for large scale ground installation



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Special cutting and soldering technology leads to low hotspot risk



Sand blowing test, salt mist test and ammonia test passed to endure harsh environments



Optimized system performance due to module level current sorting




Highly transparent self-cleaning glass brings additional yield and easy maintenance

### Delivers Reliable Performance Over Time

- manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2015, ISO14001: 2015 and OHSAS: 45001
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2- 68)
- Long term reliability tests
- 2x100% EL inspection ensuring defect-free modules

### Linear Performance Warranty

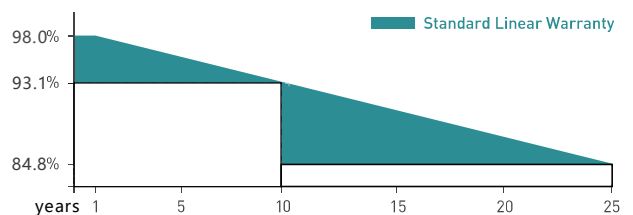

**10 Years Product Warranty    25 Years Linear Power Warranty**

\* Please refer to standard warranty for details

### Solar Panel, Solar Modules, Monocrystalline Module, PV Modules

**PVSK-645M   PVSK-650M   PVSK-655M   PVSK-660M**  
**PVSK-665M   PVSK-670M   PVSK-675M**

#### Electrical Specification (STC\*)

	Pmax[W]	645	650	655	660	665	670	675
Maximum Power	Pmax[W]	645	650	655	660	665	670	675
Maximum Power Voltage	Vmp[V]	37.2	37.4	37.6	37.8	38.0	38.2	38.4
Maximum Power Current	Imp[A]	17.34	17.38	17.42	17.46	17.50	17.54	17.58
Open Circuit Voltage	Voc[V]	45.0	45.2	45.4	45.6	45.8	46.0	46.2
Short Circuit Current	Isc[A]	18.41	18.46	18.50	18.55	18.60	18.65	18.70
Module Efficiency	[%]	20.7	20.9	21.0	21.2	21.4	21.5	21.7
Power Output Tolerance	[W]	0~+5						

\* Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, Air Mass 1.5

#### Electrical Specification (NOCT\*)

	Pmax [W]	488	492	496	500	504	509	513
Maximum Power	Pmax [W]	488	492	496	500	504	509	513
Maximum Power Voltage	Vmp [V]	34.7	34.9	35.1	35.3	35.5	35.7	35.9
Maximum Power Current	Imp [A]	14.05	14.09	14.13	14.18	14.22	14.27	14.31
Open Circuit Voltage	Voc[V]	42.4	42.6	42.8	43.0	43.2	43.4	43.6
Short Circuit Current	Isc [A]	14.81	14.85	14.88	14.92	14.96	15.00	15.04

\* Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

#### Mechanical Data

Number of Cells	132 Cells (6x22)
Dimensions of Module L*W*H [mm]	2385x1303x35mm (93.85x51.29x1.38 inches)
Weight [kg]	35.7 kg
Glass	High transparency solar glass 3.2mm (0.13 inches)
Backsheet	White
Frame	Silver, anodized aluminium alloy
J-Box	IP68 Rated
Cable	4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), 300mm (11.8 inches)
Number of diodes	3
Wind/ Snow Load	2400Pa/ 5400Pa*
Connector	MC Compatible

\* For more details please check the installation manual

#### Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	43±2°C
Temperature Coefficient of Isc	+0.040%/°C
Temperature Coefficient of Voc	-0.250%/°C
Temperature Coefficient of Pmax	-0.340%/°C

#### Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (H)
Max Series Fuse Rating	25A


#### Packaging Configuration

Module per box	31 pieces
Module per 40' container	558 pieces


#### Optional

Connector	<input checked="" type="checkbox"/> MC Original
-----------	---


#### Module Dimension

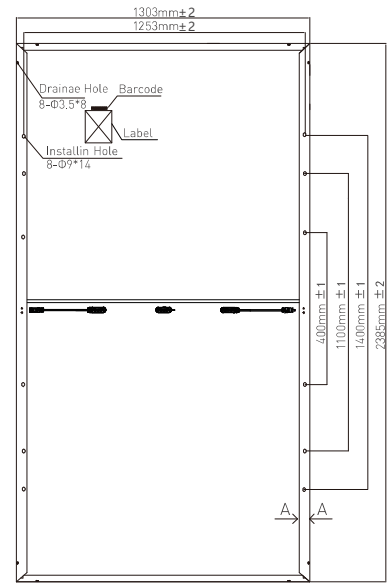

Back View



#### I-V Curve at Different Temperature (645W)

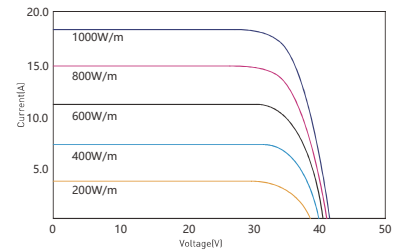

#### P-V Curve at Different Irradiation (645W)

