



BSM420M-720PH

405-420W



420W Maximum Power Output
20.7% Maximum Module Efficiency
0~+5W Power Output Guarantee

**YOUR
BEST
PV
SUPPLIER**



Ideal choice for large scale ground installation



More evenly distributed soldering points and better reliability and lower hot spot risk



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Lower LID due to lower oxygen and carbon content



Special cell process ensures great performance under low irradiance conditions




Provides higher module efficiency under low irradiance conditions, and achieves greater installation capacity in a limited space.

Key features

- World-class manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2015, ISO14001: 2015 and OHSAS: 18001 2007
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2- 68)
- Long term reliability tests
- 2×100% EL inspection ensuring defect-free modules

Linear Performance Warranty

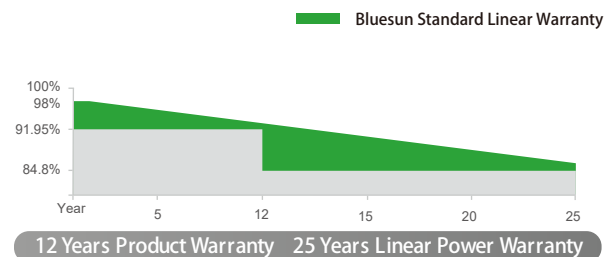

* Please refer to Bluesun standard warranty for details

Certificate



+86-158-5821-3997



info@bluesunpv.com



+86-551-6520-3660



1499 Zhenxing Road, Shushan District, 230031 Hefei, China


www.bluesunpv.com





ELECTRICAL PARAMETERS AT STC


Model	BSM405M-72OPH	BSM410M-72OPH	BSM415M-72OPH	BSM420M-72OPH
Max Power(Pmax) [W]	405	410	415	420
Open Circuit Voltage(Voc) [V]	49.3	49.5	49.8	50.0
Short Circuit Current(Isc) [A]	10.50	10.58	10.66	10.73
Max Power Voltage(Vmp) [V]	40.7	40.9	41.1	41.4
Max Power Current(Imp) [A]	9.96	10.04	10.11	10.16
Module Efficiency [%]	20.1	20.4	20.6	20.9
Power Tolerance	0-5W			
Max System Voltage	DC 1500/1000(IEC)			
Max Series Fuse Rating	20A			
Operating Temperature	-40 °C to +85 °C			
STC	Irradiance 1000W/m ² , cell temperature 25 °C, AM1.5			

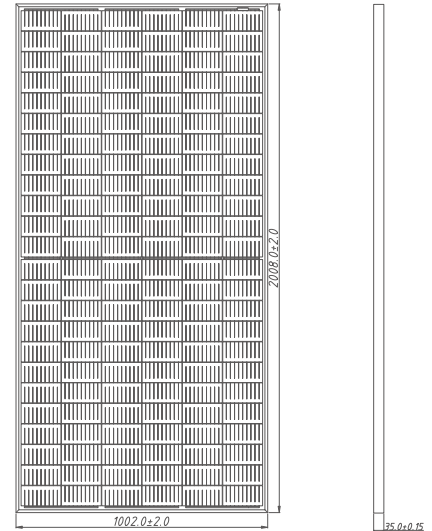

NMOT


Model Number	BSM405M-72OPH	BSM410M-72OPH	BSM415M-72OPH	BSM420M-72OPH
Max Power(Pmax) [W]	302.1	305.9	309.5	313.2
Open Circuit Voltage (Voc)	45.9	46.1	46.4	46.5
Short Circuit Current (Isc)	8.48	8.54	8.60	8.66
Maximum Power Voltage (Vmp)	37.9	38.0	38.3	38.5
Maximum Circuit Current (Imp)	7.98	8.04	8.09	8.15
NMOT	43±2°C			

*Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m

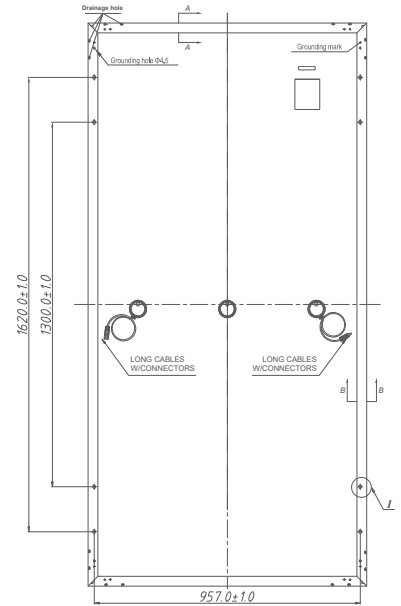


Mechanical Characteristics

Solar Cells	Mono Perc
Dimensions	2008×1002×35 (79.06×39.45×1.38inches)
Weight	22.5(49.60lbs).
Front Load	5400Pa
Connector Type	MC4 Compatible
Junction Box	IP68
Cables	4mm ²
Glass	3.2mm High Transmission Tempered Glass
Frame	Anodized Aluminium Alloy
Packing	30pcs/pallet, 250pcs/20GP, 660pcs/40HQ

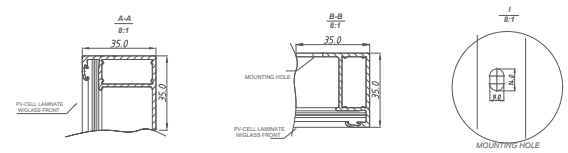

I-V Curves

Current-Voltage Curve (BSM420M-72OPH)

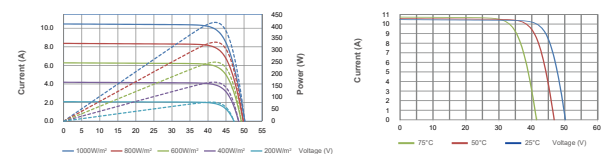

Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.36%/ °C
Temperature Coefficient of Voc	β (Voc)	-0.26%/ °C
Temperature Coefficient of Isc	α (Isc)	0.043%/ °C



+86-158-5821-3997



info@bluesunpv.com



+86-551-6520-3660



1499 Zhenxing Road, Shushan District, 230031 Hefei, China

www.bluesunpv.com

