

NPA100M-12H

Monocrystalline Module

60 Cell

Monocrystalline Module

22.9%


Maximum Efficiency

100W

Power Output

5%

Postive Tolerance

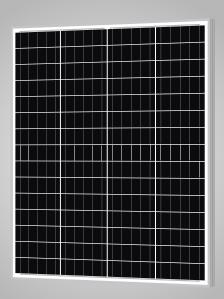



High Efficiency

Module Efficiency improved through advanced cell technology and manufacturing capabilities



High Performance Cost Ratio

Provide industry advanced cell technology and qualified materials at affordable prices



Efficient Sorting Process

System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage



Highly Reliable

Solid encapsulation and diffusion barriers provides long term protection against PID damage, built to handle 5,400 Pa of front load, rear side 2,400Pa,Hailstone Test at 1.375 inches in diameter falling at terminal velocity through the sky.

Product Certificate Mangement Certificate Other certificate

Positive mechanical load Positive Power Tolerance

Warranty

IEC 61215, IEC 61730

ISO 9001: 2016


Fire Rating Class C, TÜV Rheinland

>5400Pa

0~+5W

25-year Linear Power

Warranty

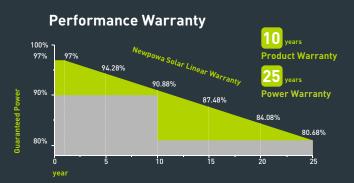







ELECTRICAL CHARACTERISTICS


Туре	NPA100M-12H
Power Output(W)	100W
Voltage MPP Vmp(V)	16.77V
Current MPP Imp(A)	6.26A
Voltage Open Circuit Voc(V)	19.83V
Short Circuit Current Isc(A)	6.56A
Temperature Coefficient Of Voc	-(80±10)mV/°C
Temperature Coefficient Of Isc	(0.065±0.015)%/°C
Temperature Coefficient Of Power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C

STC: 1000W/m² Irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3

MECHANICAL CHARACTERISTICS

Cells	Monocrystalline Silicon
Solar Cells Grade	Class A High Efficiency
Module Dimension(mm/in.)	856[33.70]x675[26.57]x30[1.18]
Weight(kg/lbs)	7.00[15.43]
Packing Information(mm/in.)	909[35.79]x727[28.62]x57[2.24]/(1pc/ctn)

I-V CURVES (Irradiance: AM1.5, 1km/m²)

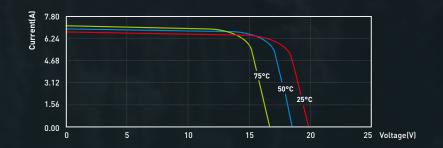

*Specications subject to technical changes and tests
NFWPOWA reserves the right of nal interpretation

