

PREMIUM

BISOL Lumina

Bifacial PV Modules with Transparent Backsheet / BDO 260 Wp (+ Bifacial Gain)



Designed and manufactured in EU



All relevant certificates



Lower losses



Module presorting for higher profitability



Excellent low light performance



Natural light transmission



Available with or without frame




Transparent back foil



Bifacial module

Guarantees:

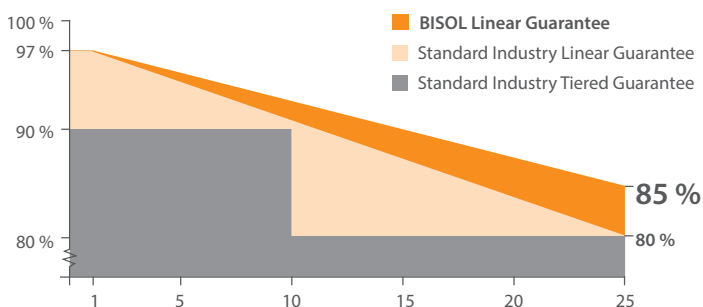

Linear Guarantee
85 % power output in 25th year



Product Guarantee
15 years

In compliance with:




Certificates available upon special request. Additional charges may apply.

Electrical Specifications @ STC (AM1.5, 1,000 W/m², 25 °C):


Module Type		BDO 260					
Number of Cells		84					
Cell Matrix		6 x 7 + 6 x 7					
Transparent Area	m ²	0.55					
	%	30					
		Front	Bifacial Gain				
Light Source	%	100	5	10	20	30	40
Nominal Power	P_{MPP} [W]	260	273	286	312	338	364
Short Circuit Current	I_{SC} [A]	11.2	11.7	12.3	13.4	14.5	15.7
Open Circuit Voltage	V_{OC} [V]	28.8	28.8	28.8	28.8	28.8	28.8
MPP Current	I_{MPP} [A]	10.6	11.1	11.6	12.7	13.8	14.8
MPP Voltage	V_{MPP} [V]	24.6	24.6	24.6	24.6	24.6	24.6
Module Efficiency	η_M [%]	14.0	14.7	15.4	16.8	18.2	19.6
Power Output Tolerance		±3 %					
Maximum Reverse Current		20 A					
Protection Class		Class II					

Additional power classes available upon request. | Efficiency at irradiation 200 W/m²: 99.3 % of STC efficiency or higher. | Tolerances for V_{OC} and I_{SC} are 3 %.

Dimensions

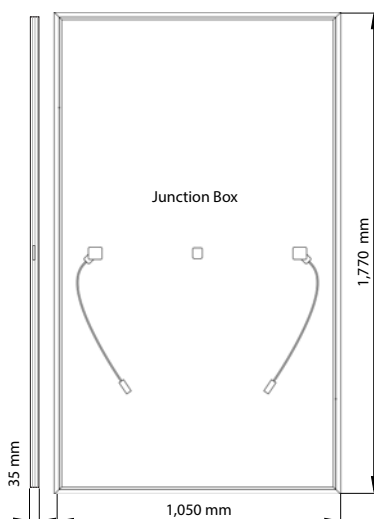

Frame Cross Section



Thermal Specifications:

Current Temperature Coefficient	α	+ 0.06 %/ °C
Voltage Temperature Coefficient	β	- 0.27 %/ °C
Power Temperature Coefficient	γ	- 0.35 %/ °C
NOCT		44 ± 2 °C
Temperature Range		- 40 °C to + 85 °C

Mechanical Specifications:

Length x Width x Thickness	1,770 x 1,050 x 35 mm
Weight	20.5 kg
Solar Cells	84 Half-Cut mono PERC Bifacial c-Si / 166 mm x 166 mm
Junction Box / Connectors / IP	3 bypass diodes / MC4 compatible / IP 68
Cable Length	Default: 1,200 mm On demand (for portrait orientation): 300 mm
Frame	Anodized Al with drainage holes / rigid anchored corners
Glass	3.2 mm AR coating tempered glass / high-transparency / low-iron content
Certified Test Load (Snow / Wind)	5,400 Pa / 2,400 Pa
Impact Resistance	Hailstone / Ø 25 mm / 83 km/h (51 mph)

Tolerances of values are ±5 %. Unspecified product properties remain under full discretion of BISOL Production.

Packaging Information:

Modules per Pallet	Packing Dimension: Length/Width/Height	Stackable	Packing Weight	Tot. Nr. of Pallets/Load
30	181 x 109 x 128 cm	3 pallets	653 kg	28

Additional terms & conditions apply. Please see *Standard Limited Guarantee* and *General Sales Terms & Conditions*.

© BISOL Production Ltd. March 2022. All rights reserved. All information presented in this document is subject to change without prior notice and serve for informative purposes only.