


SPHM6-54L 395-415 Watt

MONO CRYSTALLINE MODULE

- SP395HM6-54L
- SP405HM6-54L
- SP415HM6-54L
- SP400HM6-54L
- SP410HM6-54L



SpolarPV
Easy Invest, More Returns

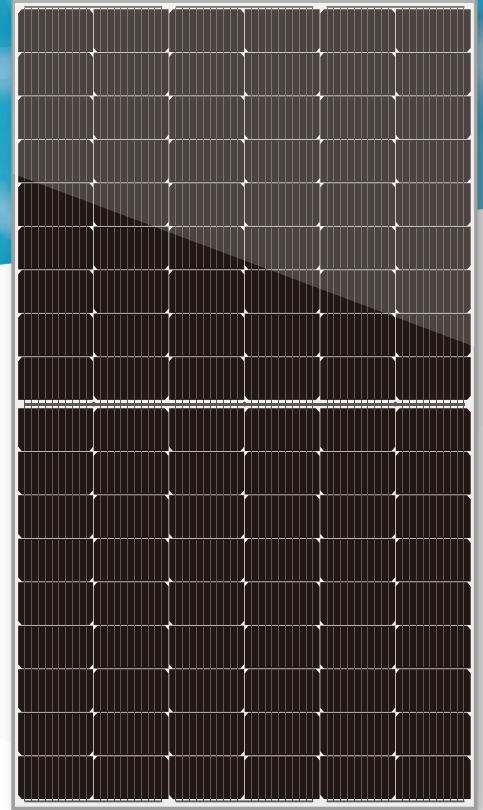

21.25%

Module efficiency



Product warranty

415 W

Highest power output




Linear power warranty

0 ~ +5W

Positive power tolerance

Key Features

Linear Performance Warranty

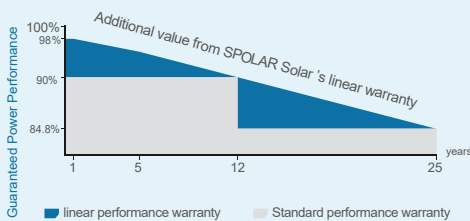

High Efficiency

Higher module conversion efficiency benefit from Passivated Emitter Rear Contact (PERC) technology.



PID Resistant

Excellent Anti-PID performance guarantee limited power degradation for mass production.



Low-light Performance

Advanced glass and cell surface texture design ensure excellent performance in low light environment.



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Durability against extreme environmental conditions

High salt mist and ammonia resistance.



ISO9001:2016 ISO14001:2016
OHSAS18001:2011 certified factory.
IEC61215 IEC61730 certified products.



www.spolarpv.com


Electrical Characteristics at Standard Test Conditions (STC)

Module Type	SP395HM6-54L	SP400HM6-54L	SP405HM6-54L	SP410HM6-54L	SP415HM6-54L
Maximum Power -Pmax (W)	395	400	405	410	415
Maximum Power Voltage - Vmp (V)	31.08	31.35	31.62	31.88	32.12
Maximum Power Current - Imp (A)	12.71	12.76	12.81	12.86	12.92
Open-circuit Voltage - Voc (V)	37.36	37.69	38.02	38.35	38.67
Short-circuit Current - Isc (A)	13.47	13.52	13.57	13.62	13.67
Module Efficiency STC (%)	20.22%	20.48%	20.73%	20.99%	21.25%
Power tolerance	0~+5W		Operating Temperature(°C)		-40 °C~+85 °C
Temperature coefficients of Pmax	-0.350%/°C		Maximum system voltage		1500 V
Temperature coefficients of Voc	-0.275%/°C		Maximum series fuse rating		25A
Temperature coefficients of Isc	0.045%/°C		Nominal operating cell temperature		45±2 °C

Mechanical Characteristics


Cell Type	Mono-crystalline PERC 182×91mm
No.of cells	108 (6×18)
Dimensions	1724×1135×35mm
Weight	21.5 kg
Front Glass	3.2mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, MC4 Compatible, 3 Bypass Diodes
Output Cables	1×4.0mm ² , Length:300mm or Customized Length
Packaging Configuration	62pcs/stack, 806pcs/40'HQContainer (Two pallets=One stack)

Dimensions

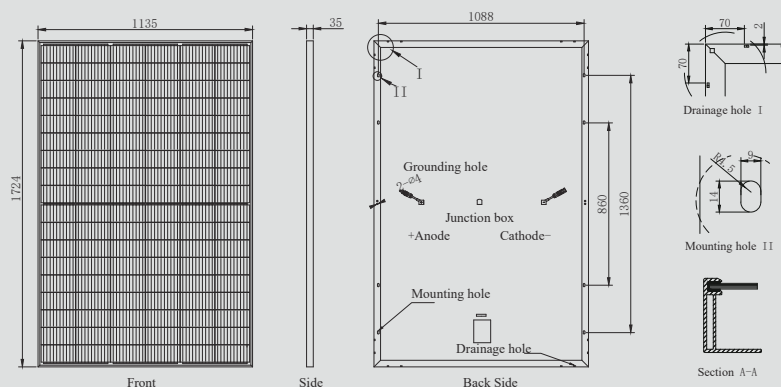

IV-Curves

Current-Voltage Curve under different irradiance



Current-Voltage Curve under different working temperatures

