



www.eceindia.com

310 W - 350 W | POLY Aadhya Series


**ECE
INDIA**
Sun for Everyone

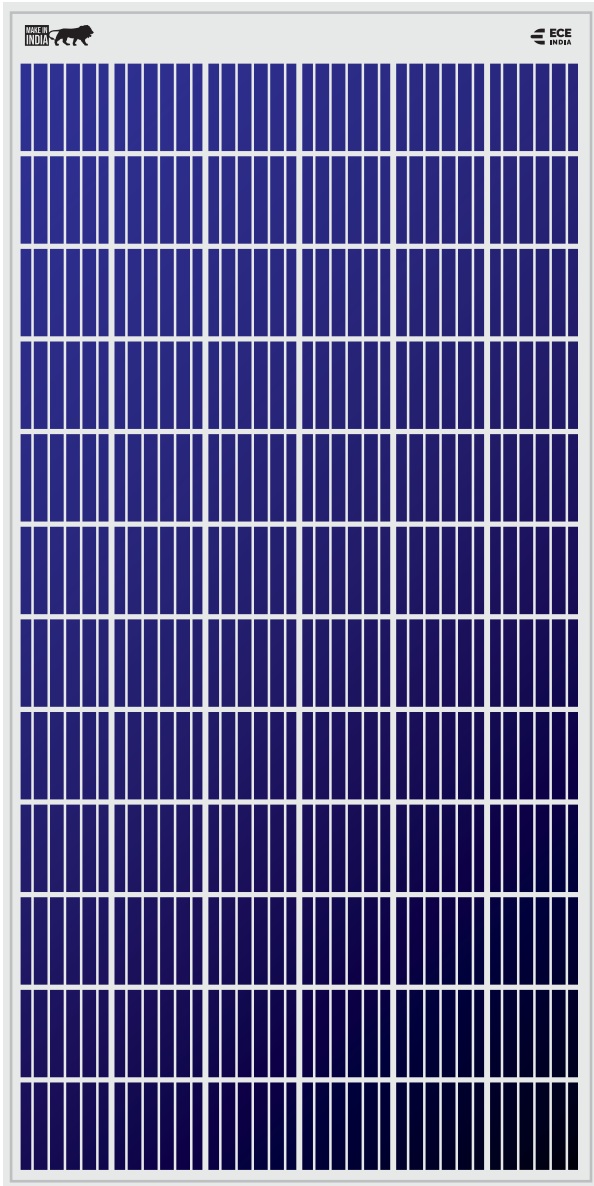

PID resistant module ensuring long term reliability



Anti Reflective Coating for improved light transmission



Certified to withstand the most challenging weather



High system voltage reduced the BOS cost more reliability



25 Years Linear Warranty longer life



ECE India Energies Pvt Ltd

F 27, Amravati MIDC Area, Express Highway NH 06, Amravati 444607, Maharashtra.

**MAKE IN
INDIA**

Technical Specification


PV Model	Open Circuit Voltage (Voc) in volt	Short Circuit Current (Isc) in Amps	Voltage at Max Power (Vmp) in Volts	Current at Max Power (Imp) in Amps	Module Efficiency (η)	Module Fill Factor (FF%)	Module Weight in Kilograms	Dimensions in millimeter		
								Length (L)	Width (W)	Thickness (T)
ECE-310	45.54	8.95	36.74	8.44	15.98	76.08	21.8	1960	990	35
ECE-320	45.57	8.76	39.02	8.21	16.51	80.25	21.8	1960	990	35
ECE-325	45.79	8.8	39.24	8.3	16.78	80.83	21.8	1960	990	35
ECE-330	46.08	8.85	39.6	8.35	17.04	81.08	21.8	1960	990	35
ECE-335	46.29	8.91	39.74	8.43	17.26	81.23	21.8	1960	990	35
ECE-340	46.74	8.94	39.85	8.54	17.54	81.44	21.8	1960	990	35
ECE-350	46.95	9.17	41.4	8.48	18.09	81.54	21.8	1960	990	35

*All electrical parameters specified at STC: 25°C cell temperature; 1000W/M2 irradiance; AM 1.5



Temperature Coefficient

Tc of Open Circuit Voltage (β)	-0.360%/°K \pm 0.02
Tc of Short Circuit Current (α)	0.0060%/°K \pm 0.01
Tc of Power (γ)	-0.360%/°K \pm 0.02
NOCT	45 \pm 2°C


Power Curves of PV Module (350 Wp)

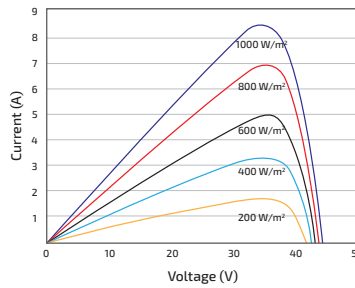

Power Curves of PV Module (350 Wp)

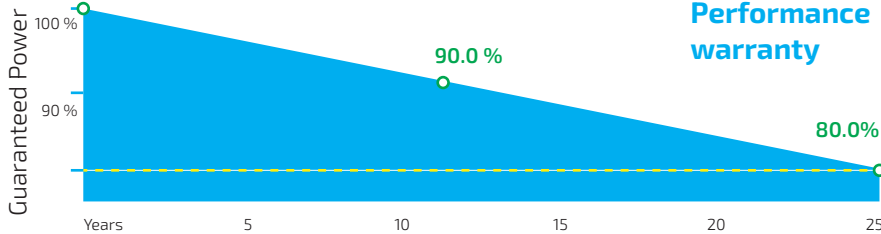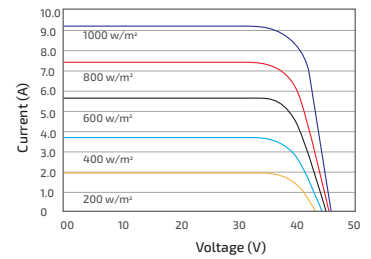

Mounting Details & Dimensions in mm

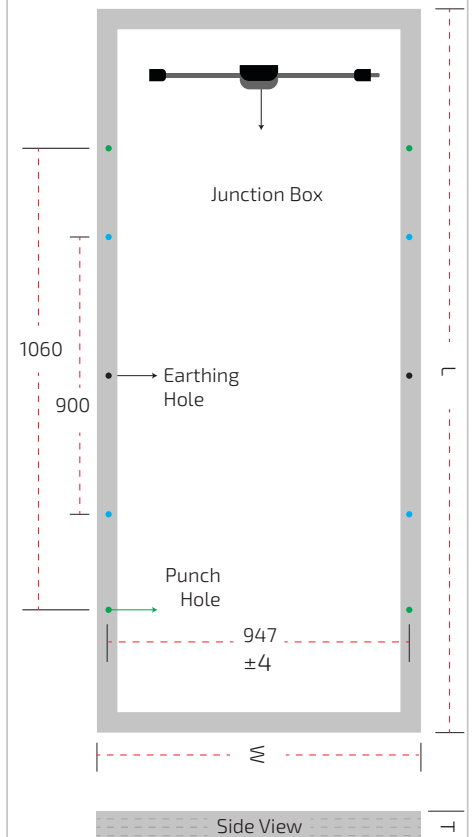

Warranty

10 years	Product Warranty
12 years	90% of Power
25 Years	80% of power