

Pitched Tile Roof Mounting System




Technical Data

Application:	Pitched Tile Roof
Material:	SUS 304 Stainless Steel
Standard:	AS/NZS 1170
Max Wind Speed:	Up to 60 m/s
Snow Load:	Up to 1.4 kn/m ²
Warranty:	10 years warranty, 20 years service life
Applicable Module:	Framed or Frameless
Module Orientation:	Portrait or Landscape

Main Hooks

- | | |
|---|---|
| <p>Art. No.: KS-RH-001
Pantile Roof Hook
Aluminum Nut
Bolt M8*25
Wooden Screw ST6.3*80mm</p> | <p>Art. No.: KS-RH-002
Pantile Roof Hook
Aluminum Nut
Bolt M8*25
Wooden Screw ST6.3*80mm</p> |
| <p>Art. No.: KS-RH-003
Pantile Roof Hook
Aluminum Nut
Bolt M8*25
Wooden Screw ST6.3*80mm</p> | <p>Art. No.: KS-RH-004
Pantile Roof Hook
Aluminum Nut
Bolt M8*25
Wooden Screw ST6.3*80mm</p> |
| <p>Art. No.: KS-RH-005
Adjustable Pantile Roof Hook
Aluminum Nut
Bolt M8*25
Wooden Screw ST6.3*80mm</p> | <p>Art. No.: KS-RH-006
Slate Tile Roof Hook
Aluminum Nut
Bolt M8*25
Wooden Screw ST6.3*80mm</p> |
| <p>Art. No.: KS-RH-007
Slate Tile Roof Hook
Aluminum Nut
Bolt M8*25
Wooden Screw ST6.3*80mm</p> | <p>Art. No.: KS-RH-008
Slate Tile Roof Hook
Aluminum Nut
Bolt M8*25
Wooden Screw ST6.3*80mm</p> |
| <p>Art. No.: KS-RH-009
Plain Tile Roof Hook
Aluminum Nut
Bolt M8*25
Wooden Screw ST6.3*80mm</p> | <p>Art. No.: KS-RH-010
Plain Tile Roof Hook
Aluminum Nut
Bolt M8*25
Wooden Screw ST6.3*80mm</p> |

Installation Details

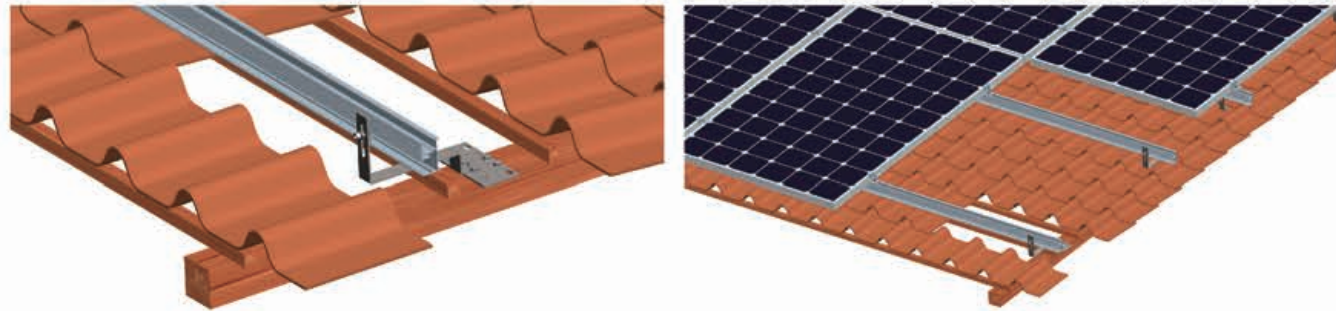

Components:

- | | | |
|--------------|-------------|---------------------|
| | | |
| Rail | Rail Splice | Pantile Hook |
| | | |
| Middle Clamp | End Clamp | Wooden screw |
| | | |
| | | Aluminum Nut & Bolt |