


# M10 PERC

Conventional

## AOX 54M10HC 400W-415W


- Based on M10-182mm solar cells.
- Higher module quality ensures long-term reliability
- MBB Technology, better light trapping and current collection to improve module power output and reliability.
- Excellent Anti-PID performance guarantee via optimized mass production process and materials control

WORLD SHINES BECAUSE OF YOU

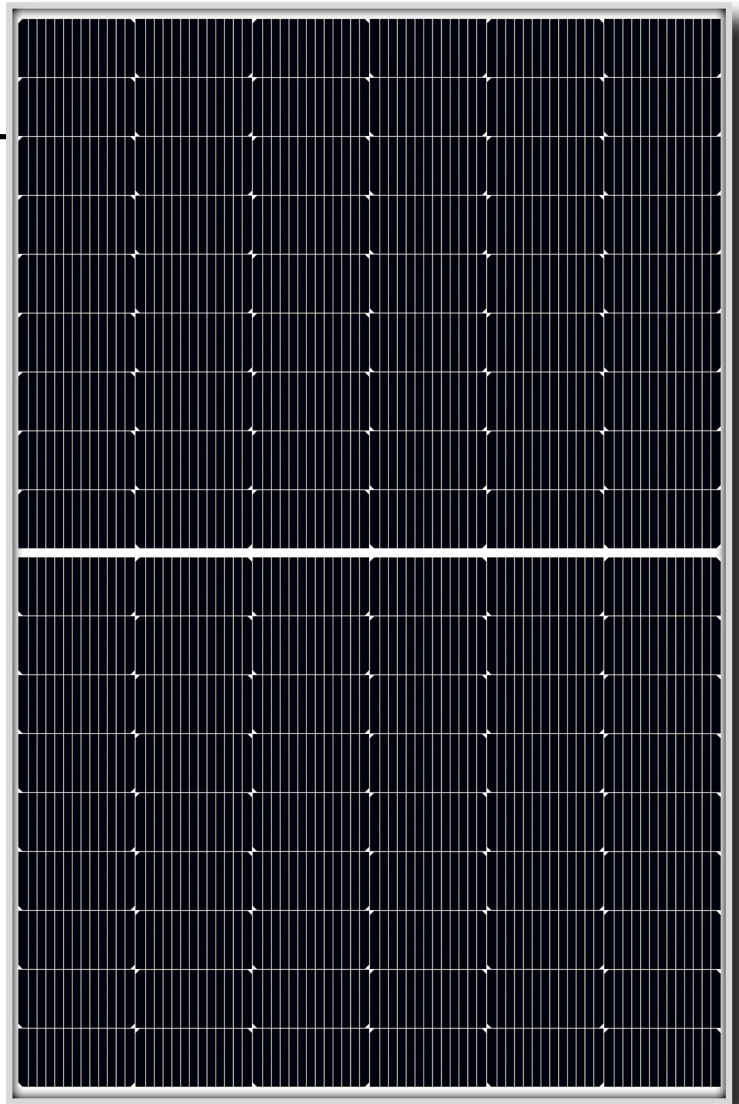

### PRODUCT Warranty


12-year Warranty for Materials and Processing  
30-year Warranty for Extra Linear Power Output

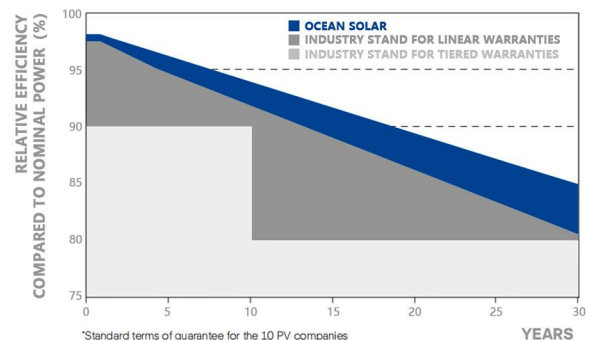

\*Standard terms of guarantee for the 10 PV companies with the highest production capacity in 2014 (as at: September 2014)

### PRODUCT Certifications



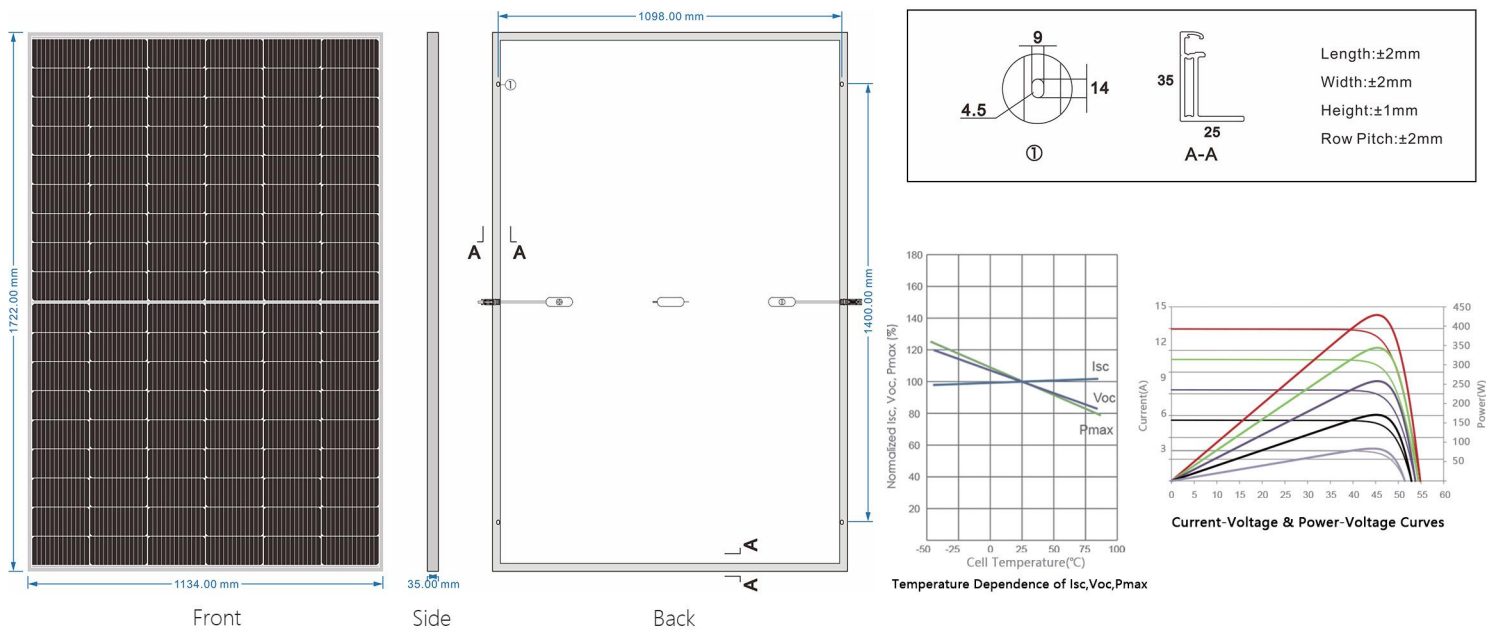

## Electrical Characteristics

STC : AM1.5 1000W/m<sup>2</sup> 25°C

NOCT : AM1.5 800W/m<sup>2</sup> 20°C 1m/s

Test uncertainty for Pmax: ±3%

Module Type	AOX-54M10HC400W		AOX-54M10HC405W		AOX-54M10HC410W		AOX-72M10HC415W	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	400Wp	298Wp	405Wp	301Wp	410Wp	305Wp	415Wp	309Wp
Voltage at Maximum Power (Vmp/V)	30.42V	28.42V	30.52V	28.56V	30.62V	28.72V	30.79V	28.88V
Current at Maximum Power (Imp/A)	13.15A	10.47A	13.27A	10.55A	13.39A	10.62A	13.48A	10.69A
Open Circuit Voltage (Voc/V)	36.98V	34.90V	37.06V	34.98V	37.14V	35.05V	37.31V	35.21V
Short Circuit Current (Isc/A)	13.78A	11.13A	13.85A	11.19A	13.92A	11.24A	14.01A	11.32A
Module Efficiency(%)	20.50%		20.70%		21.00%		21.30%	

## Mechanical Parameters

Cell Orientation	6*20 (120) solar half cells
Junction Box	IP 68 3 diodes
Output Cable	4.0mm <sup>2</sup> solar cable(IEC) (+)≥350mm (-)≥350mm or customized
Glass	3.2mm, High Transmission, AR Coated Heat Strengthened Glass
Frame	35mm Anodized Aluminium Alloy
Weight	19.2kg
Dimension	1755*1038*35mm
Packaging	31pcs/pallets,858pcs/ 40HQ Container

## Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

## Product Warranty

Warranty for Materials and Processing	12 Year
Warranty for Extra Linear Power Output	30 Year

## Operating Parameters

Operational Temperature	-40~+85 °C
Power Output Tolerance	0~5W
Voc and Isc Tolerance	±3%
Maximum System Voltage	1000/1500VDC(IEC)
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	UL type 1 or 2 IEC Class C

## Temperature Ratings (STC)

Temperature Coefficient of Isc	0.046%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.30%/°C

## Product Certifications



Ocean Solar Co.,Ltd

E-mail:info@oceansolar.cn

Web:www.oceansolar.cn

© 2022 Ocean Solar All rights reserved.

Specifications included in this datasheet are subject to change without notice.

