


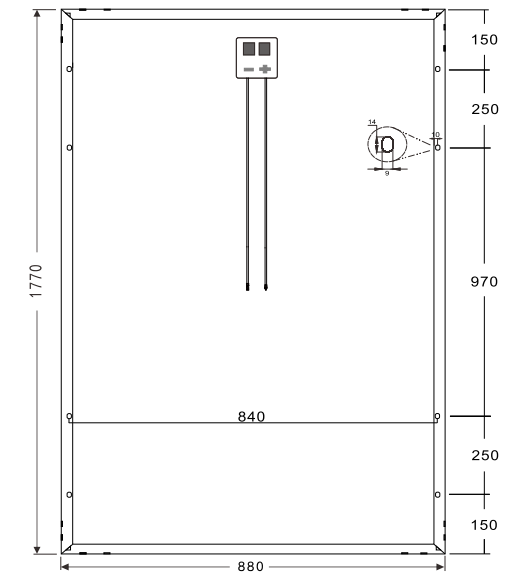


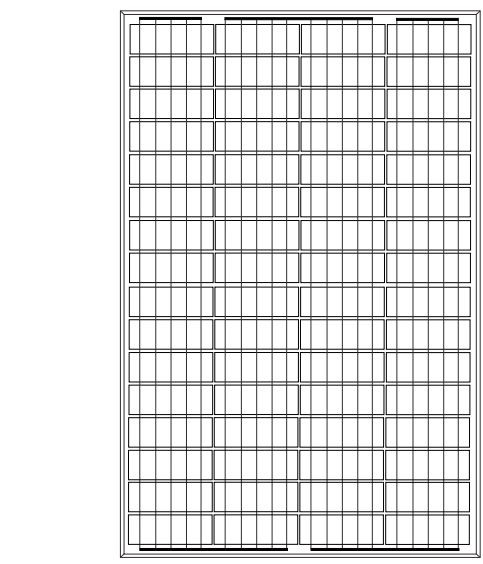

QN-210M32035

Comprehensive Certificates




- IEC61215/IEC61701/IEC61730
- ISO 9001:2015 Quality Management System
- ISO 45001:2018 Occupational health and safety management system
- ISO 14001:2015 Environmental Management System

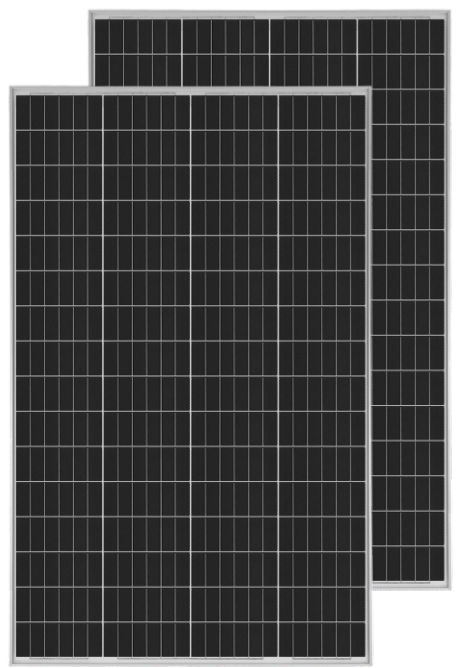

Electrical Parameters at (STC)

| Power (W) | Module Efficiency(%) | Voltage at Pmax(Vmp) | Current at Pmax(Imp) | Open Circuit Voltage(Voc) | Short Circuit Current(Isc) | Power Tolerance(w) |
|-----------|----------------------|----------------------|----------------------|---------------------------|----------------------------|--------------------|
| 320W | 20.54% | 35.84 | 8.92 | 43.77 | 9.45 | ±3% |

Characteristics



PS:Frame color and cable length can be customized

Mechanical Parameters

| | |
|-----------------------|---------------------------------------------|
| Solar Cell(Type/Size) | MONO(210mm) |
| Solar Cells Number | 64Pcs(4x16) |
| Dimension | 1770x880x35mm |
| Tempered Glass | 3.2 mm High Permeability Coated |
| Frame | Anodized aluminum alloy |
| Junction Box | IP67 3*20AMOS diode |
| Cable | 4.0mm ² , (+) 1000mm/ (-) 1000mm |
| Connector | Original MC4/Compatible MC4 |

Packing

| | |
|----------------|---------------|
| Module Type | QN-210M32035 |
| Carton Size | 1780x890x85mm |
| Number | 2Pcs/Ctn |
| G. W | 40Kg/Pcs |
| N. W | 38.2Kg/Pcs |
| 20GP Container | 419Pcs |
| 40HQ Container | 1048Pcs |

STC: Light intensity 1000W/m₂ Battery temperature:25°C atmosphere quality=15

NOCT: Light intensity 800W/m₂ Battery temperature:20°C atmosphere quality=15 wind velocity 1m/s