


## DAS MODUL MONO FS


DMMFS325 | DMMFS330 | DMMFS335 | DMMFS340

DAS MODULFS is the latest generation of solar modules developed and manufactured by SOLUXTEC. Already awarded several times for the unique design of its aluminium frame, as well as for the integration of the latest solar cell innovation FSM3. DAS MODUL is manufactured with the best materials available and assembled in our German factory.


### Innovative Solutions












Water drainage




Self stackable & Eco friendly design





### Features

-  PID Safe
-  1500V
-  Mono FS Perc Cells
-  Easy to handle & No sharp sides 100% EL
-  Quality Control
-  8100 Pa Max test load
-  Self Stackable Frame & water drainage
-  Excellent thermal properties
-  Positive sorting 0 / + 4,99 Wp
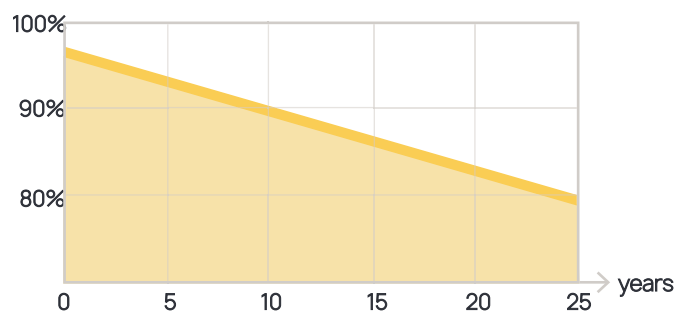
### Quality Guarantee



-  25 years product warranty
-  25 years linear performance warranty

### Certifications



# DAS MODUL MONO FS

DMMFS325 | DMMFS330 | DMMFS335 | DMMFS340

## Electrical Parameters under STC Conditions

(1000 W/m<sup>2</sup>, 25°C +/- 2°C, AM=1,5 according to IEC 60904\_3)



Model	DMMFS325	DMMFS330	DMMFS335	DMMFS340
Maximum PowerPoint (Pmax)*	325	330	330	340
Open Circuit Voltage (Voc)	40,95	41,21	41,47	41,72
Short Circuit Current (Isc)	10,28	10,35	10,42	10,48
Maximum Power Voltage (Vmpp)	33,26	33,52	33,78	34,05
Maximum Power Current (Impp)	9,78	9,85	9,92	9,99
Module Efficiency (%)	19,44	19,73	20,03	20,33
Power Tolerance (Wp)	0 - 4,99 Wp			
Temperature coefficient TC <sub>Isc</sub>	+ 0,048 %/°C			
Temperature coefficient TC <sub>Voc</sub>	- 0,330 %/°C			
Temperature coefficient TC <sub>Pmpp</sub>	- 0,380 %/°C			

\*Power measurement of flasher unit +/- 3%

## Electrical Parameters under NMOT conditions

(800 W/m<sup>2</sup>; NMOT, AM=1,5)

Model	DMMFS325	DMMFS330	DMMFS335	DMMFS340
Maximum PowerPoint (Pmax)	239	243	247	251
Open Circuit Voltage (Voc)	37,85	38,11	38,37	38,62
Short Circuit Current (Isc)	8,23	8,28	8,34	8,39
Maximum Power Voltage (Vmpp)	30,58	30,84	31,10	31,37
Maximum Power Current (Impp)	7,83	7,88	7,94	8,00

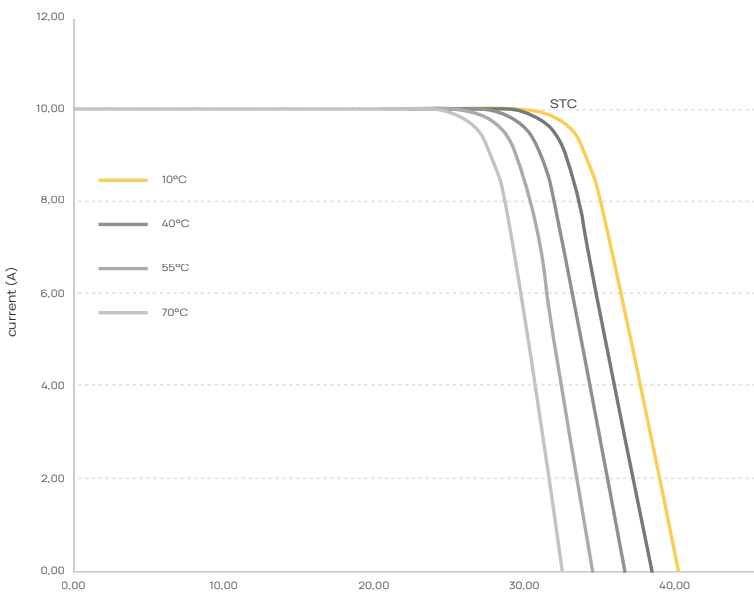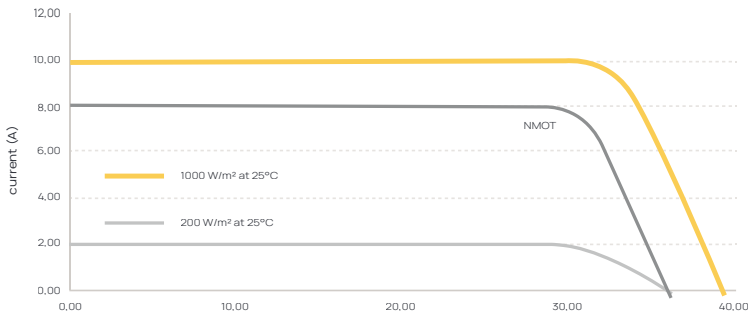

## Operating Conditions

Max. Operating Voltage: Protection	1500 Vdc
Class: Operating T°	Class II
range: Max. Reverse	-40°C ... +85°C
Current: STC 25°C:	16 A
NMOT 45°C:	+/- 2°C
Design load + (snow):	+/- 2°C
Maximum test load +:	5400 PA
Design load- (wind):	8100 PA*
Maximum test load-:	1600 PA
	2400 PA*

\*safety factor 1,5

## Mechanical Properties

Dimensions:	1665 x 1005 x 35 mm
Weight:	18,5 kg +/- 3 %
Cell:	60 mono Perc FS 5bb
Junction Box:	IP68, 3 diodes potted
Connectors:	MC4 Evo2 or Compatible
Cables:	2 x 900 mm
Solar Glass front:	3,2 mm tempered ARC

## Packaging

Per Pallet:	30 modules
Per Truck:	30 pallets

## Certifications

IEC 61215, EN 61730, IEC61701, IEC62804, LVD 2014/35/EU, EMC 2014/30/EU, IN METRO, RAL SOLAR

## Mechanical Specification

