

ISEN250Y: 250Wp

Features



- Excellent Power Output with +ve Tolerance.
- 10 Year Limited Product Warranty
- 25 Year Linear Power Guarantee
- Generate Power even at Low Light
- High Performance Modules with 15.40% efficiency.
- PID Resistance


- ARC, Ultra-clear toughened and textured glass
- Multi layer tedlar® and Fast Cure EVA
- Reinforced anodized aluminium frame
- Pre-drilled frame for easy mounting
- IP-65 & IP-67 rated Junction Box
- Solar MC4 compatible connector

Applications

- On-grid systems
- BIPV
- Solar farms
- Standalone (off-grid) systems

Constructional Characteristics

- Frame
- Glass
- EVA
- Cells
- Back sheet




Certifications


- IEC 61215 & 61730
- IEC 61701 (Salt Mist Test)
- NABL-MNRE (UL) Certified
- ISO 9001-2015; ISO 14001-2015

Specifications	ISEN250Y
Cell	Multicrystalline Solar Cell
Electrical Characteristics	
Open Circuit Voltage (Voc)	74.10 V
Optimum Operating Voltage (Vmp)	60.24 V
Short Circuit Current (Isc)	4.38 A
Optimum operating Current (Imp)	4.16 A
Power at STC (Pmax)	250 W
Module Efficiency (η)%	15.40%
Module Fill Factor (FF)%	77.20%
Operating Conditions	- 40 C to + 85 C at 85% RH
Temperature Co-efficient for Voc/ C (β)	-0.34%
Temperature Co-efficient for Isc/ C (α)	0.05%
Temperature Co-efficient for power/ C (γ)	-0.40%
NOCT	45°C ± 2°C
Mechanical Characteristics	
Weight	17.6 Kg
Module Dimension (A) x (B) x (C)	1650 x 986 x 35 mm
Mounting Hole (Oblong) (I x J)	9 x 14 mm
Mounting Hole CTC distance - vertical (H)	860 mm
Mounting Hole distance from corner (E)	395 mm
Mounting Hole CTC distance - horizontal (F)	949 mm

Frame Design



Light-Level Performance for Isc and VOC

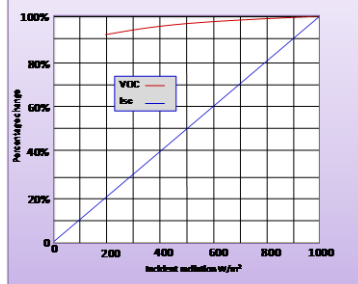

Linear Power Guarantee on En-Icon PV modules
97% upto 1 year then @ 0.63% / year

