

WRS-60M

POWER RANGE

320W~350W

CELL FEATURE

158.75*158.75, 22.49%



JUNCTION BOX

High waterproof rating
Protection Degree: IP67
Safety Class: Class II
Rated Voltage: 1500V



FRAME

Strong mechanical load resistance up to 5400Pa
Anodic oxidation layer resistant to chemical corrosion
Available in silver and black.



5BB




9BB

QUALIFICATIONS & CERTIFICATES



· IEC61215 / · IEC61730

WARRANTY

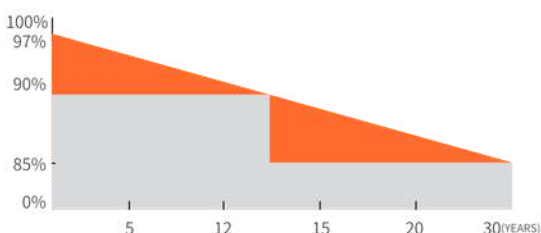

20 YEARS Guarantee on product material and workmanship

30 YEARS Linear Power output warranty



MBB CELLS

More uniform current collection reduces the current loss of the cell inside panels



Anti-reflective Glass

Increases the light absorption and reduces the power loss caused by the self-cleaning in rain.



Excellent performance in low irradiance

Enables solar panels to generate electricity in the morning and on cloudy or rainy days.




PID Resistant

Perfect resistance against PID (Potential Induced Degradation) to secure your investment.

WRS-60M

PV DRAWINGS

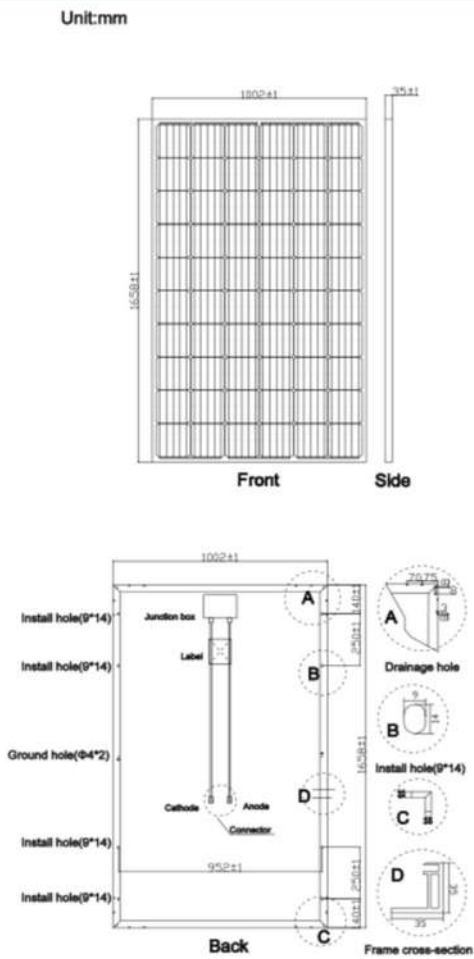

ELECTRICAL DATA (STC)

Model Type	WRS 320- M30	WRS 325- M30	WRS 330- M30	WRS 340- M30	WRS 350- M30
Peak Power(Pmax)	320.00	325.00	330.00	340.00	350.00
Maximum Power Voltage(Vmp)	32.84	32.94	33.04	33.24	33.44
Maximum Power Current(Imp)	9.75	9.87	9.99	10.23	10.47
Open Circuit Voltage(Voc)	40.23	40.35	40.47	40.72	40.97
Short Circuit Current(Isc)	10.27	10.39	10.52	10.77	11.02
Cells Efficiency(%)	21.17	21.50	21.83	22.49	23.15
Module Efficiency(%)	19.26	19.56	19.86	20.46	21.06

* STC: irradiance 1000 W/m², AM 1.5, and cell temperature of 25°C

ELECTRICAL DATA (NOCT)



Model Type	WRS 320- M30	WRS 325- M30	WRS 330- M30	WRS 340- M30	WRS 350- M30
Peak Power(Pmax)	238.00	241.00	245.00	252.00	263.00
Maximum Power Voltage(Vmp)	30.71	30.80	30.90	31.08	31.37
Maximum Power Current(Imp)	7.75	7.83	7.93	8.11	8.39
Open Circuit Voltage(Voc)	37.83	37.95	38.07	38.29	38.63
Short Circuit Current(Isc)	8.22	8.30	8.41	8.60	8.90

* NOCT: irradiance 800 W/m², AM 1.5, ambient temperature 20°C, wind speed 1 m/s

TEMPERATURE & MAXIMUM RATING

Maximum System Voltage (V)	1500/1000
Maximum Series Fuse Rating (A)	20
Power Tolerance	0~+3 %
Pmax Temperature Coefficients (W/°C)	-0.400 %
Voc Temperature Coefficients (V/°C)	-0.290 %
Isc Temperature Coefficients (A/°C)	+0.048 %
NOCT Nominal Operating Cell Temperature (°C)	45±2
Operating and Storage Temperature (°C)	-40~+85

IV CURVE

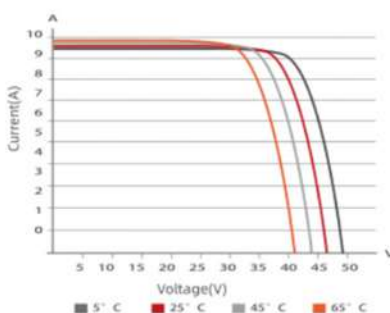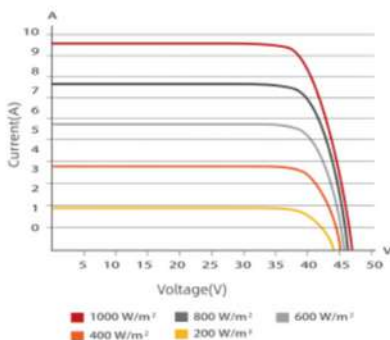

MECHANICAL CHARACTERISTICS

Cell Type	158.75x158.75 Mono
No. of Cells	60 (6x10)
Dimensions	1658x1002x35mm
Weight	18.60kg
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP65 / IP67
Output cables	4mm ² cable 90cm+mc4
MaxWind Load/Snow Load	2400Pa/5400Pa

PACKING WAY

40HQ container

28 Packages/910pcs



WARIS ENERGY SRL

Italy- Via di Vittorio, 19, 38068, Rovereto (TN)

Germany- Im Speitel 9, 76229, Karlsruhe

Turkey- Mimarsinan OSB. 15. Can No:8, Melikgazi

EMAIL: INFO@WARIS-ENERGY.COM

TEL: 0039- 0464- 973892