Ti2014 Series 100 & 200



Customer Benefits & Product Features:

- Open top loading for continuous feed
- No material breakdown required
- Dual chamber option
- Australian designed & manufactured
- Up to 5 year warranties (conditions apply)
- Compliant with all National & International safety requirements
- Category 3 safety system
- Quality Assurance certified
- 24/7 nationwide sales & service
- Rent / Lease / Buy
- Customer satisfaction guarantee


- Huge labour cost reduction
- Easy to operate
- Open top balers are 40-50% more efficient than conventional vertical balers
- Baler purchase includes initial twine supply, twine safety cutter, bale transport & removal trolley, Operation Manual & Service booklet
- Tie options include twine with 240kg breaking strain, wire or metal strap
- Optional anti-rebound fingers for heavier & quicker baling option available on our open top range
- Optional false floor for smaller bales







Ti2014 Series 100 & 200

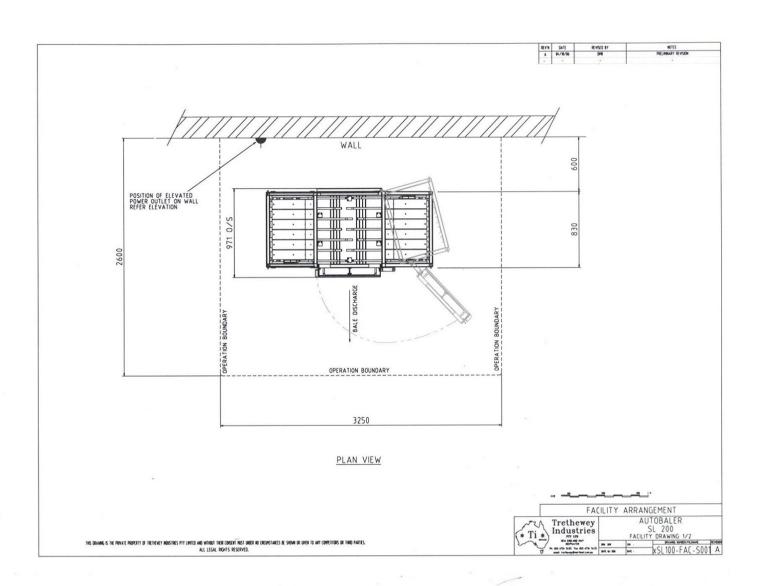

Specifications:

Bale weights 100 model 100-140kg

200 model 175-200kg

Bale size

750x750x1000mm

Cycle time

100 model 30 seconds

200 model 28 seconds

Unit weight

1050kg

Power

100 model 3kw 3phase

200 model 4kw 3phase

Electrical

20amp 4pin Clipsal compatible

Height

2050mm

Width Depth 1950mm

Compaction force 100 model 6000kg

900mm

Baler capacity

200 model 8500kg 2 bales per hour

Trethewey Industries Pty Ltd

14 Carl Baer Circuit

DEEPWATER NSW 2371

Ph (02) 6734 5403

Fax (02) 6734 5433

FREECALL 1800 888 403

Email sales@autobaler.com.au

Web Site www.autobaler.com.au