

SKYMAX^{series}

RM-705-740W-210M/132T

N-TOPCon Monocrystalline Module

- **Light Redirecting Film:** Ronma TOPCON modules use gap Light Redirecting Film technology to ensure the bifaciality and reliability of the module, meanwhile effectively increasing the power performance.
- **No-Destructive Cutting:** Ronma cells-cutting is using NDC (non-destructive) cutting technology, the cutting surface is smooth, which avoids the loss of the mechanical structure of the cells and ensures sufficient current.
- **Junction Box Laser Welding Technology:** Ronma uses the high energy density and precise positioning control capabilities of the laser to achieve high-quality welding. It can accurately control the junction box welding position and welding time to ensure welding quality and reliability, to improve module safety.

2384×1303×33

Dimensions (mm)

132 CELL

Mono TOPCon

705-740Wp

Power output

1500V DC


Max. system voltage

23.82%

Max. efficiency

LINEAR PERFORMANCE WARRANTY

15-year product warranty / 30-year linear power warranty

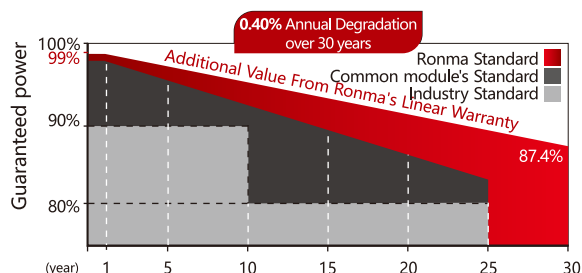

IEC61215/IEC61730/IEC61701/IEC62716/WEEE De93315506



Higher Power Output

Module power increases by 5-25% generally, bringing significantly lower LCOE and higher IRR. 0-5w positive tolerance output warranty.



Multi Busbar Technology

By improving optical utilization rate, power increases by 2~3% and efficiency increases by 0.4~0.6%.



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and material control.



Low-light Performance

Excellent performance in low light.



Durability Against Extreme Environmental Conditions


High salt mist and ammonia resistance certified by TUV NORD.




EL Full Inspection

Dual-stage 100% EL Inspection.


Dimensions of PV Module

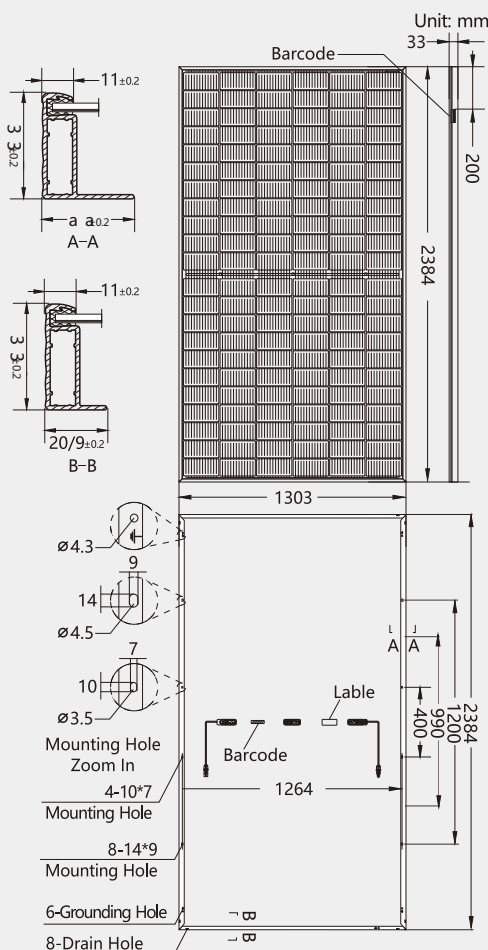

RM-740W-210M/132T
I-V characteristics at different irradiances
Cells temp.=25°C

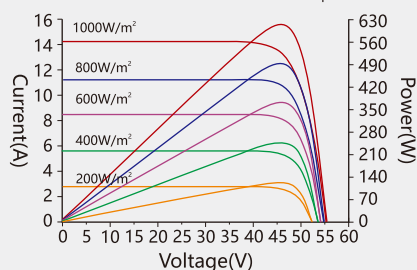

I-V characteristics at different temperatures

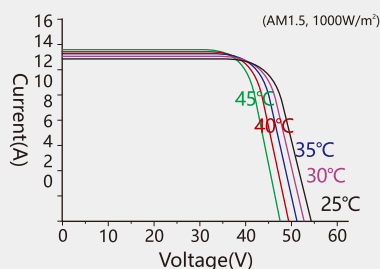

ELECTRICAL CHARACTERISTICS (STC*)

[illegible]

*STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

WORKING CHARACTERISTICS (NOCT*)

Rated Power in Watts-Pmax(Wp)	533	537	541	545	549	553	557	561
Open Circuit Voltage-Voc(V)	37.14	37.34	37.54	37.74	37.94	38.14	38.34	38.54
Short Circuit Current-Isc(A)	14.22	14.26	14.30	14.34	14.38	14.42	14.46	14.50
Max. Power Voltage-Vmpp(V)	44.56	44.75	44.94	45.13	45.32	45.51	45.70	45.89
Max. Power Current-Imp(A)	15.09	15.13	15.17	15.21	15.25	15.29	15.33	15.37
Power tolerance	0~+3%							
NOCT	45°C±2°C							
Operating Temperature	-40°C~85°C							

*NOCT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Electrical characteristics with different rear side power gain

	Pmax/W	Voc/V	Isc/A	Vmpp/V	Impp/A
5%	766	49.80	19.49	41.70	18.40
10%	803	49.80	20.42	41.70	19.27

The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

MECHANICAL CHARACTERISTICS

Number of cells	132pcs	Type of frame	Anodized Aluminum Alloy
Type of cell	N-TOPCon Mono	Size of module(mm)	2384×1303×33
Thickness of glass(mm)	2.0	Weight(kg)	34.4
Junction box	IP68, 1500V DC, 3 Diodes	Cables/connectors	4.0mm², MC4 compatible
Length of Cable	+350mm/-250mm	Length can be customized (connector included)	

PACKAGING CONFIGURATION

Height of Modules (mm)	33
Number of Modules Per Pallet	33
Packaging Box Dimensions (l×w×h) (mm)	1326×1140×2515
Box Gross Weight (kg)	1280
Number of Modules Per 40ft (HQ) Container	594
Number of Pallets Per 40ft (HQ) Container	18

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT
©2023 Ronma Solar. All rights reserved. Specifications included in this datasheet are subject to change without notice.

