


# TOPCon

Monofacial

**525-550W**

SN(525~550W)-132MT **18BB**

Mono MBB **N-type** large size half cut module

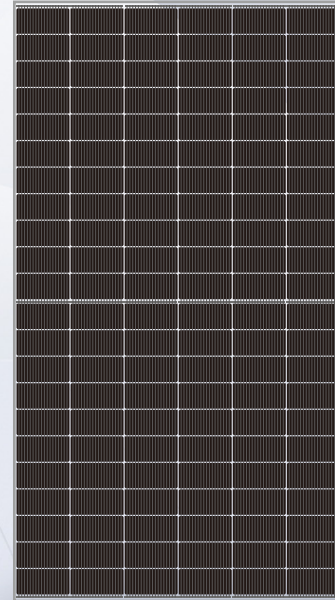

## KEY FEATURES



Sine Energy Topcon solar modules adopts the latest 18 bus bar technology decrease the current transverse propagation path by 50% and improve the efficiency of the modules up to 23.1%.



5-25w higher than Perc modules with the same size result in lower LCOE and O/M cost.



N type topcon modules has better reliability in harsh environment and lower LID/LETID.



N type Topcon solar cells makes longer life span, lower degradation and better performance in weak light conditions



Half cut cell and optimized circuit design as well split junction box makes lower the power loss caused by shadow and mismatch.



Lower thermal coefficient for higher power generation at higher temperature.



Selected encapsulating materials and stringent production process controls ensures highly PID resistant.



Ideal for usage in residential rooftops, commercial and large-scale plants.

## CERTIFICATION


IEC61215 | IEC61730 | IEC 61701 | CE | INMETRO  
 ISO 9001  
 2015 Quality Management System  
 ISO 14001  
 2015 Environmental Management System  
 ISO45001  
 2018 Occupational Health and Safety Management System



## INDUSTRY LEADING WARRANTY

**12 years** Guarantee on product material and workmanship

**30 years** Linear power output warranty

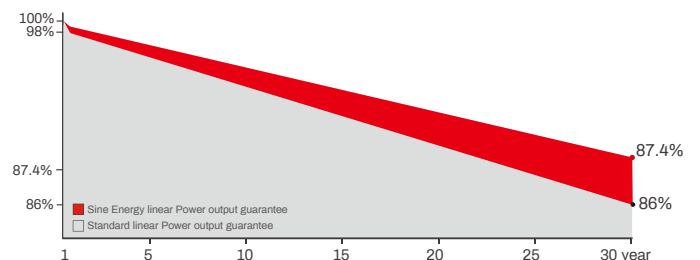



# SN(525~550W)-132MT

Weight  
**24kg**

Number of Cells  
**132pcs(22×6)**

Module Size  
**2094×1134×30mm**

Packing  
**37pcs/pallet,814pcs/40HQ**

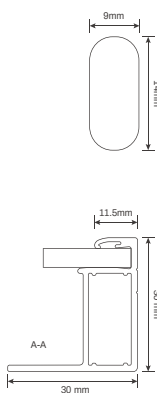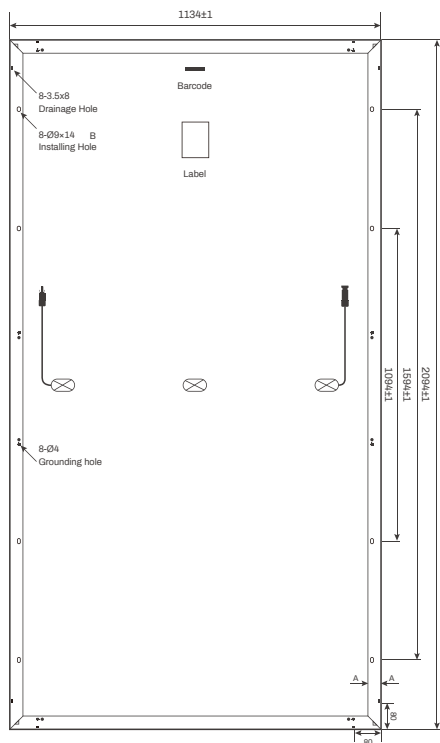

## MECHANICAL SPECIFICATIONS

Solar Cell Type	182×183mm
Glass	3.2mm tempered, high transmission ART coating
Back Sheet	White KPF
Frame	Silver Anodized Aluminium Alloy
Junction Box	IP68
No. of Diodes	3pcs
Output Cable	4.0mm <sup>2</sup> 400/400mm (custmized available)
Connector	MC4 Compatible (MC4 Original optional)
Wind/Snow Load	2400pa/5400pa

## TEMPERATURE COEFFICIENT

Nominal Operating Cell Temp(NOCT)	45±2 C
Temperature Coefficient of ISC	+0.045%/ C
Temperature Coefficient of VOC	-0.230%/ C
Temperature Coefficient of Pmax	-0.280%/ C
Operational Temperature	-40 C ~ +85 C
Maximum System Voltage	1500V DC(IEC)
Maximum Series Fuse Rating	25A
Fire Rating	Class C
Protection Class	Class II

## STC — Electrical Characteristics

Maximum Power -Pmax(W)	525W	530W	535W	540W	545W	550W
Maximum Power Voltage-Vmp(V)	40.70	40.95	41.19	41.40	41.62	41.84
Maximum Power Current-Imp(A)	12.90	12.95	12.99	13.05	13.10	13.15
Open Circuit Voltage -Voc(V)	49.98	50.20	50.42	50.64	50.86	51.08
Short Circuit Current-Isc(A)	13.46	13.49	13.52	13.55	13.58	13.61
Module Efficiency(STC) -ηm(%)	22.11	22.33	22.53	22.75	22.96	23.16
Power output tolerance(W)	±3%					
STC:AM:1.5, front:1000W/m <sup>2</sup> , 25°C.						

## NOCT — Electrical Specification

Maximum Power -Pmax(W)	395W	399W	403W	407W	411W	415W
Maximum Power Voltage-Vmp(V)	36.46	36.63	36.80	36.97	37.13	37.29
Maximum Power Current-Imp(A)	10.86	10.92	10.95	11.01	11.07	11.13
Open Circuit Voltage -Voc(V)	44.92	45.08	45.24	45.40	45.56	45.72
Short Circuit Current-Isc(A)	11.27	11.34	11.42	11.49	11.57	11.64
NOCT:AM:1.5, front:800W/m <sup>2</sup> , Wind Speed:1m/s, 20°C						

## I-V Curve

