

SLAC-EH3-MPPT

MPPT Solar charge Controller series (40A-60A)

Technical Characteristics





Model MODEL:SHAC-EH3 40A/50A/60A -SERIES		40A	50A	60A
Charge Mode	Maximum Power Point Tracking			
Method	3 stages: fast charge(MPPT),constant voltage, floating charge			
System Type	DC12V/24V/48V	A	Automatic recognition	1
	12V system	DC9V~DC15V		
System Voltage	24V system	DC18V~DC30V		
	48Vsystem	DC36V~DC60V		
Soft Start Time	12V/24V/48Vsyste m		≤10S	
Dynamic Response	12V/24V/48Vsyste	500us		
Recovery Time	m			
Conversion	12V/24V/48Vsyste	≥96.5%,≤99%		
Efficiency	m			

PV Modules	12V/24V/48Vsyste				
Utilization Rate	=====================================				
	INPUT	CHARACTERISTIC	cs		
MDDT W. 1.	12V system	DC18V~DC150V			
MPPT Working Voltage and Range	24V system	DC34~DC150V			
	48V system	DC65~DC150V			
I W-14 I4	12V system	DC16V			
Low Voltage Input Protection Point	24V system	DC30V			
Frotection Foint	48V system	DC60V			
Low Voltage Input	12V system	DC22V			
Recovery Point	24V system	DC34V			
J	48V system	DC65V			
May DC Valtage	12V/24V/48V	DC160V			
Max DC Voltage	system				
Input Overvoltage	12V/24V/48V	DC150			
Protection Point	system		DC130		
Input Overvoltage	12V/24V/48V	DC145V			
Recovery Point	system		DC143 V		
	12V system	570W	700W	900W	
Max. PV Power	24V system	1130W	1400W	1700W	
	48V system	2270W	2800W	3400W	
	OUTPU'	T CHARACTERISTI	CS		
Select-able Battery	12V/24V/48V	Seeled lead	acid vented Gel N	iCd battery	
Types (Default type is	system	Sealed lead acid, vented, Gel, NiCd battery (Other types of the batteries also can be defined)			
GEL battery)	System	(Other types o	The batteries also ea	in be defined)	
Constant Voltage	12V/24V/48V				
Constant voltage	system	Please check the charge voltage according to the battery type			
Floating Charge	12V/24V/48V		form.		
Voltage	system				
Over Charge	12V system	14.6V			
Protection Voltage	24V system	29.2V			
Trotection voltage	48V system	58.4V			
Rated Output Current	12V/24V/48V	40A	50A	60A	
	system	1011			
Current-limiting	12V/24V/48V	44A	55A	66A	
Protection	system				
Rate charge current	12V/24V/48V	40A	50A	60A	
Rate charge cultelli	System	3011			
	-	'		±0.02%/°C	
Temperature Factor	12V/24V/48V		±0.02%/°C		
Temperature Factor	12V/24V/48V system		±0.02%/°C		
Temperature Factor Temperature Compensation	12V/24V/48V	14.2V-(The	±0.02%/°C	-25°C)*0.3	

Output Ripples(peak)	12V/24V/48V system	200mV	
Output Voltage	12V/24V/48V	≤±1.5%	
Stability Precision	system	≥±1.576	
Charge voltage	12V/24V/48V	200mV	
Peak-Peak Ripple	System	200H V	
Charger voltage	12V/24V/48V	≤±1.5%	
accuracy	System	≥±1.570	
		Discharge characteristic	
Setting Control	Co	ntroller or LAN	
Max discharge current	12V/24V/48V System	40A	
Discharge	12V/24V/48V	C 20442	
protection	System	fuse 30A*2	
Double-time control	12V/24V/48V System	On in morning ,off in morning / On in night ,off in night	
ON / OFF mode	12V/24V/48V System	ON / OFF	
PV voltage control	12V/24V/48V System	PV voltage on, PV voltage off	
PV voltage / time	12V/24V/48V		
delay control	System	PV voltage on, time delay off	
Discharge voltage	12V/24V/48V	Output off when it under setting voltage; Factory set is	
protection	System	10.5 .(Note : set based on 1 battery)	
	Com	munication Features	
RS232	12V/24V/48V		
Communication	System	Chose COM communication	
	12V/24V/48V	Set IP and Gate address for controller and solar eagle ;Then	
LAN Communication	System	chose TCP communication	
		Protection	
Input Low Voltage Protection		Check the input characteristics	
Input Overvoltage Protection		Check the input characteristics	
Input Polarity Reversal Protection		yes	
Output Overvoltage Protection		Check the output characteristics	
Output Polarity Reversal Protection		yes	
Short-circuit Protection		Recover after eliminating the Short-circuit fault, no problem for long term Short-circuit	
Temperature Protection		95°C	
Temperature protection		Above 85°C, decrease the output power, decrease 3A per	
Other Parameters			
No:		≤40dB	
Noise		<u>></u> 40UD	

Thermal methods	Forced air cooling, fan speed rate regulated by temperature, when inner temperature is too low, fan ran slowly or stop; when controller stop working, fan also stop ran.	
Components	World brand raw materials. Compliance with EU standards. All rated temperature of electrolytic capacitors not less than $105^{\circ}\mathrm{C}$	
Smell	No peculiar smell and toxic substances.	
Environment Protection	Meet the 2002/95/EC,no cadmium hydride and fluoride	
	Physical	
Measurement DxWxH (mm)	270*185*90	
N.G(kg)	3	
G.N(kg)	3.6	
Color	Blue/Green (optional)	
Safety	CE, RoHS, PSE,FCC	
EMC	EN61000	
Type of Mechanical Protection	IP21	
Environment		
Humidity	0~90%RH (no condense)	
Altitude	0~3000m	
Operating Temperature	-20°C ~ +40°C	
Storage Temperature	-40°C ~ +75°C	
Atmospheric Pressure	70~106kPa	

Description

This is a solar charge controller $40A \sim 60A$ that have automatic max. power point tracking function with high efficiency that almost $30\%\sim60\%$ higher than traditional charge controller. It also features the functions of system voltage auto recognition, wide rang of PV input ,charge for all kinds of battery,automatic discharge control,RS 232 / LAN communication function and so on. It is very high-end product for solar market.

Features

- 1.MPPT charge mode, conversion efficiency up to 99%
- 2.12V/24V/48V system auto recognize;
- 3. Wide range of PV input with max. is DC150V.
- 4. Memory function, Save setting function: date, time, generating capacity record and so on .
- 5. Charge mode: 3 stages (fast charge, constant charge , floating charge) . It prolongs service life of the batteries .
- 6.Discharge mode: ON/OFF mode, double time control mode,PV voltage control mode ,PV voltage+time delay mode and so on .

- 7. Selected battery types: sealed lead acid, vented, gel, NiCd battery. Other types of the batteries can also be defined.
- 8.Most information could be provide by LCD and LED like: model no.,PV input voltage,battery type,battery voltage,charging current,charging power,working status and so on. Also customer's information like company name,website and logo can be added into Solar Eagle software.
- 9.RS232 and LAN communication port. IP and Gate address could be user define it satisfy global area. And communication protocol can be provided to manage all information.
- 10. The upper computer software is displayed in 11 languages, it could show work status and be set parameters of the discharge system.
- 11. With intelligent design, the device can be upgraded online lifelong.
- 12. Compliance with the 2002/95/EC environment protecting demand, doesn't include the Cadmium, hydride and fluoride etc material
- 13.Equipment integrity: controller + CD-ROM(microcomputer software) + communication wire + temperature sensing wire + Anderson terminals;
- 14.CE,ROHS certifications approved.
- 15.2 years warranty. The service life is designed to use for 10 years in theory. Extended 3~10 years warranty service also can be provided.

Note:

We provide OEM and ODM service. The 36V/72V/96V model also can be custom made for you.


Product Parts:








Upper Computer Software and testing Software:

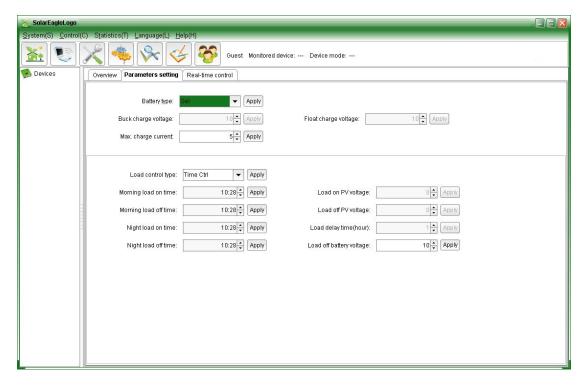

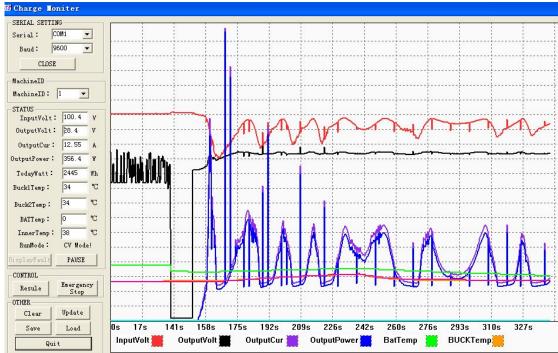

Products Package


NO. Quantity	Description
--------------	-------------

1	1 pc	Charge controller
2	2 pc	Gallow pulley (For install the controller on the wall)
3	4 set	Screw (For install the controller on the wall)
4	1 pc	232 turn to RJ45 communication cable
5	1 pc	User manual
6	1 pc	Temperature sensing wire
7	2 pc	Fuse wire

Note:

- 1) Attachment is upper computer software which is suitable for all computer systems .
- 2) Trafficker will provide neutral upper computer software and CD,or with customer's logo.
- 3) WIN7,IN8 system user,please log in as administrator. More details please check the manual.


Information on Display and Settable Parameters:

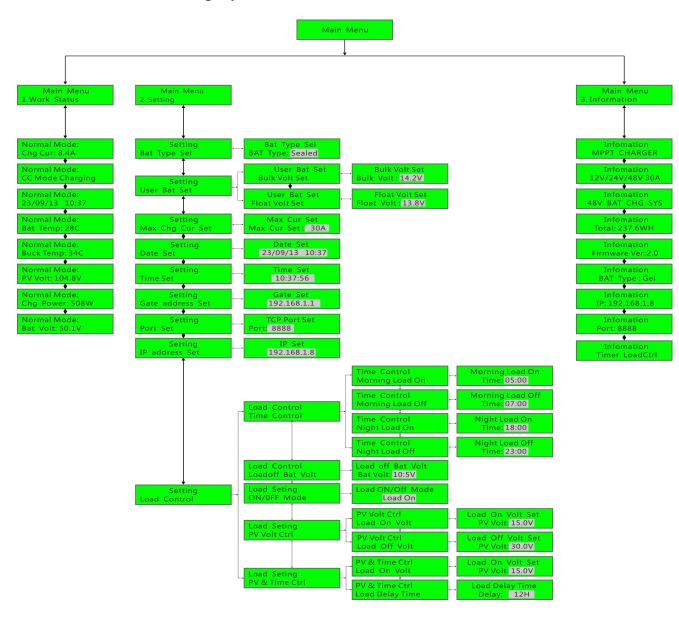

Note:

1) All above information is a sample which is the working state of MPPT in sometime. In different working stage the parameters will change like work mode, charge current ,charge mode ,charge power and so on ; In the fault mode it will show fault mode ;

Installation

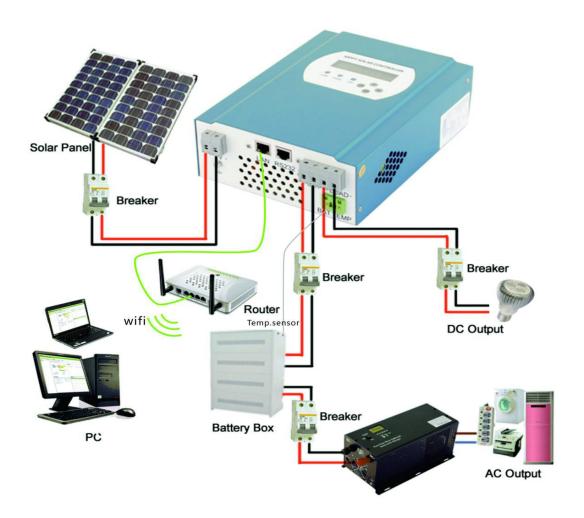

Note:

- 1) Above is off-grid solar system connection picture;
- 2)Other ways for PC-communication, please check the manual for details;

Subject to change without notice.

Version: 20141030

Made in China

www.upnetech.com