




ALL IN ONE 3500VA / 5000VA SOLAR POWER SYSTEM



- A. MPPT Charge controller screen
- B. AC output
- C. Solar inverter screen
- D. PV switch
- E. PV input
- F. AC input switch
- G. Charger input protect
- H. Inverter output protect
- I. AC input & output
- J. Battery switch

Product features

- AC Charger Function
- Good Protect performance
- Easy Installation
- Competitive Price
- Long Lifespan
- convenient transportation

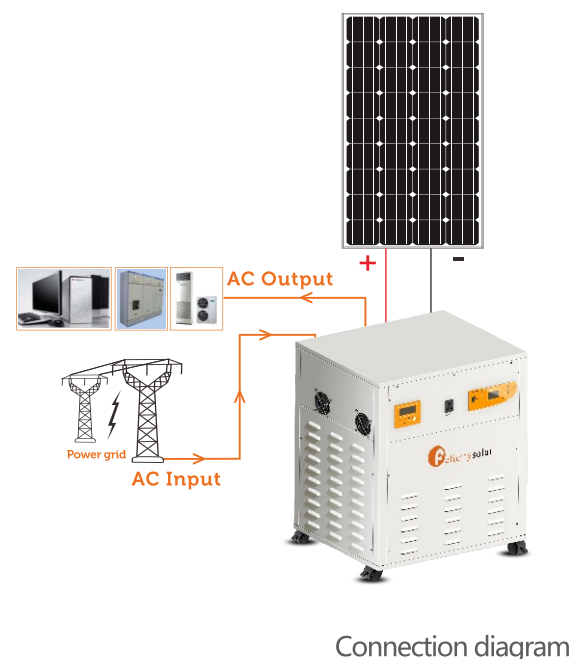

Product Parameters:

| MODEL | All in one solar power system | |
|--|-------------------------------|------------------------|
| | FL-POWERALL-P3500VA24V | FL-POWERALL-P5000VA48V |
| Solar Module | | |
| Panel | Poly 250W 30V*4PCS | Poly 250W 30V*9PCS |
| Connection Method | 2 Series 2 Parallel | 3 Series 3 Parallel |
| Built-in MPPT solar controller | | |
| Maximum PV Array Open Circuit Voltage | 145VDC | |
| Maximum Charge Current | 60A | |
| Maximum PV Array Power | 1600W | 3200W |
| Nominal Battery Voltage | 24VDC | 48VDC |
| Built-in Solar GEL battery | | |
| Rated Capacity(10hour Rate) | 200AH 12V*2PCS | 200AH 12V*4PCS |
| Connection Method | 2 Series | 4 Series |
| Built-in Solar Inverter | | |
| Rated Output Power (VA) | 3500VA | 5000VA |
| Nominal DC Input Voltage | 24V | 48V |
| Max AC Charge Current | 35A | 40A |
| Nominal Output Voltage | 220VAC 50Hz | |
| Any Solar Power system design and installation, please contact us | | |

Installation

