



金品能源


KPV220M-72

200-220W Mono solar panel

单晶硅太阳能组件

TUV、CE、ISO、

CQC等产品认证

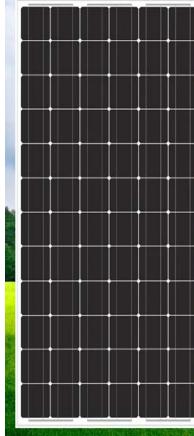

MONO
220W



Characteristics(特征)



4 Busbar solar cell(4主栅光伏电池片):

With excellent current collection capability, decreasing consumption of current during current passing through solar cell, offer a better appearance, making it perfect for rooftop installation.(更加均匀的电流收集能力,降低电池片的电流内损耗,外形美观,更加适合民房安装)



High Efficiency(高效) :

High module conversion efficiency(up to 16.8%)through innovative manufacturing technology(通过高水平生产工艺,获得组件高转换效率)



Severe Weather Resilience (载荷能力) :

certified to withstand:wind load(2400pascal)and snow load(500pascal)可承载2400帕风压和500帕积雪压强。




Durability against extreme environmental conditions (严酷环境的适应性) :

High salt mist and ammonia resistance certified by TUV SOUTH.(TUV南德测试认证通过高盐雾及高氨气腐蚀测试)

10年工艺质保 25年功率质保


Linear Performance Warranty
Standard Board Warranty

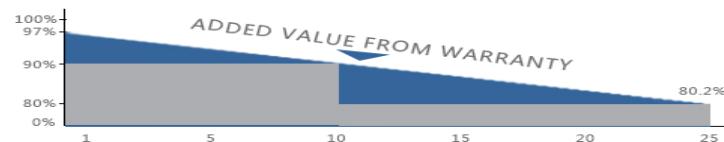


CE



内部结构图

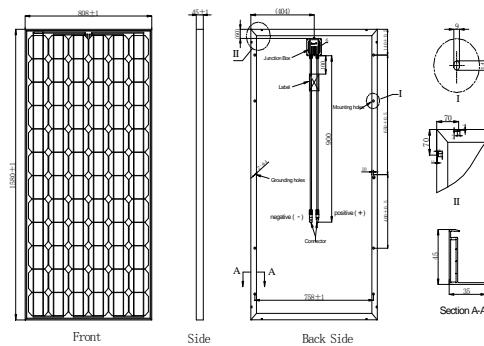

测试曲线图

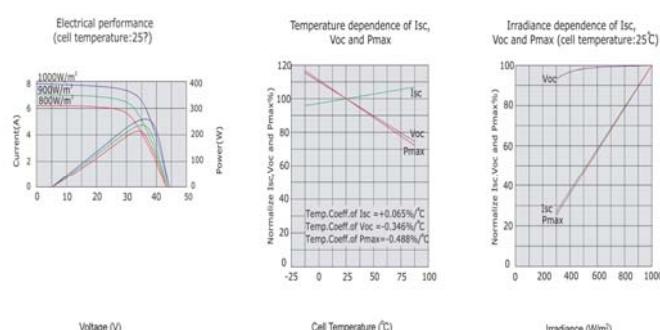

电性能参数

Model No.型号	KPV200M-72	KPV205M-72	KPV210M-72	KPV215M-72	KPV220M-72
-------------	------------	------------	------------	------------	------------

最大功率 (Pmax)	200W	205W	210W	215W	220W
-------------	------	------	------	------	------

最佳工作电压(Vmp)	36.9V	37.2V	37.4V	37.7V	38V
-------------	-------	-------	-------	-------	-----

最佳工作电流(Imp)	5.42A	5.51A	5.61A	5.70A	5.78A
-------------	-------	-------	-------	-------	-------

开路电压 (Voc)	45.6V	45.9V	46.1V	46.4V	46.7V
------------	-------	-------	-------	-------	-------

短路电流 (Isc)	5.80A	5.90A	5.99A	6.09A	6.17A
------------	-------	-------	-------	-------	-------

组件尺寸	1580*808*35MM				
------	---------------	--	--	--	--

电池片排列	6*12PCS				
-------	---------	--	--	--	--

电池片尺寸	125*125MM				
-------	-----------	--	--	--	--

重量	14.5KGS				
----	---------	--	--	--	--