

Black Elegance Superior Shingled

ASP SG Series 390W-400W BE

Shingled monocrystalline PV-module in Black Design



QUALITY & RELIABILITY

Best raw materials, optimized production process and accurate testing makes the quality difference



GERMAN ENGINEERING

Best design by the art of German engineering



SAVE INVESTMENT

Product warranty of 12 years and performance warranty of 25 years



POSITIVE PERFORMANCE TOLERANCE

Up to +5 W plus-tolerance on output



FOR ALL ENVIRONMENTAL CONDITIONS

Resistant against PID, sand, salt and ammonia



STABLE AND STRONG

Capable to bear heavy snow loads up to 5400 Pa and wind loads up to 2400 Pa




12 YEARS
PRODUCT WARRANTY


OUR PERFORMANCE GUARANTEE



25 YEARS
PERFORMANCE GUARANTEE

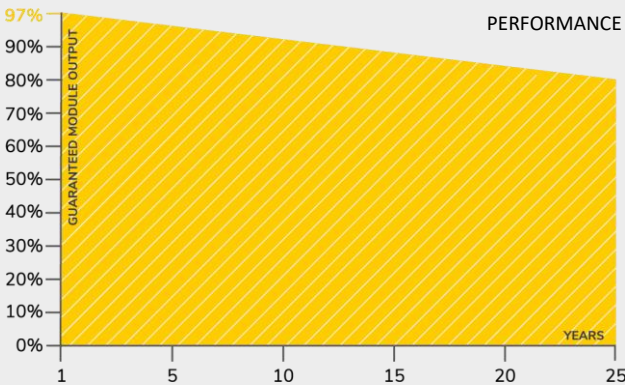

CERTIFICATES

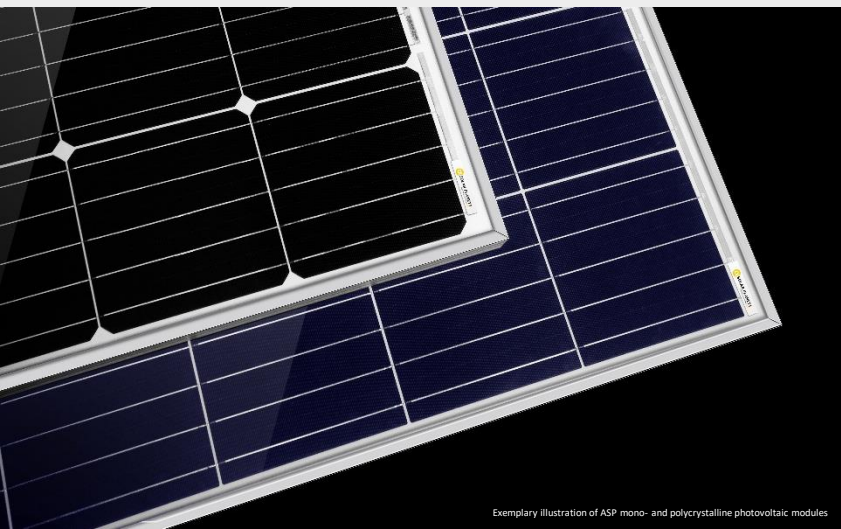

**Quality
Diligence
Durability**



Black Elegance Superior Shingled Module

ASP SG Series 390W-400W BE

TECHNICAL DATA

ASP-SG-390W

ASP-SG-395W

ASP-SG-400W

Parameter	Unit	ASP-SG-390W	ASP-SG-395W	ASP-SG-400W
Maximum power	P _{max} (Wp)	390	395	400
Maximum power voltage	V _{mp} (V)	40.8	40.9	41.1
Maximum power current	I _{mp} (A)	9.56	9.66	9.76
Open-circuit voltage	V _{oc} (V)	49.3	49.4	49.6
Short-circuit current	I _{sc} (A)	10.03	10.07	10.12
Module efficiency	%	20.8	21.1	21.3
Power tolerance	P _{max} (W)		0/+5	
Maximum system voltage DC	V		1500	
Operating temperature	°C		-40 to +85	
Temperature coefficients of P _{max}	%/°C		-0.34	
Temperature coefficients of V _{oc}	%/°C		-0.27	
Temperature coefficients of I _{sc}	%/°C		0.04	
Nominal operating cell temp. (NOCT)	°C		42.3±2	

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.


MATERIAL CHARACTERISTICS

Cell type	PERC monocrystalline 158.75 x 158.75 mm
Dimensions	1646 x 1140 x 35 mm
Weight	20.5 kg
Junction box	IP68 rated
Output cable	4.0 mm ² , 900 mm length
Connector type	MC4 / MC4 compatible
Hail resistance	Max. Ø 25 mm, at 23 m/s
Wind load	2400 Pa / 244 kg / m ²
Mechanical load	5400 Pa / 550 kg / m ²

PACKING INFORMATION

Packing configuration	62 pcs / double pallet
Loading capacity	868 pcs / 40 HQ
Size / pallet	1660 x 1135 x 2490 mm
Weight	1370 kg / pallet

DRAWINGS

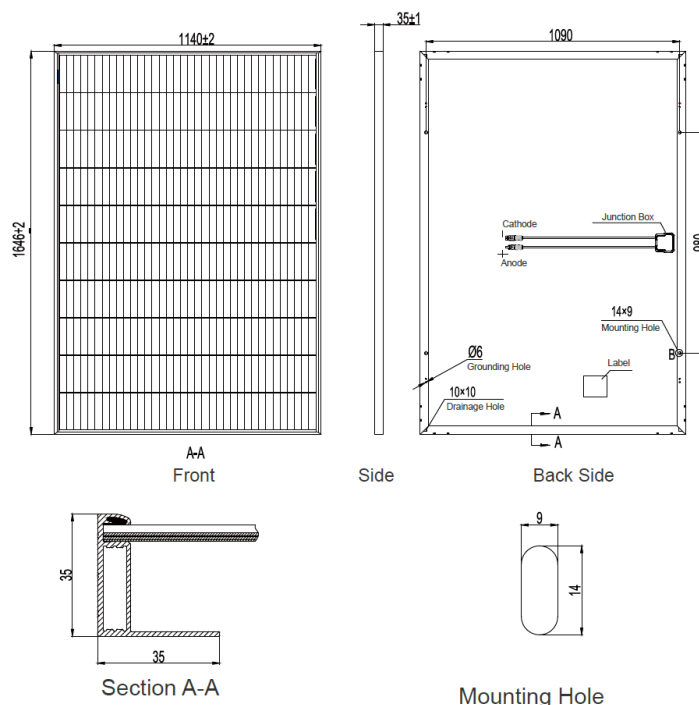

Alpha Solar Planet GmbH
Döllgaststr. 4, 86199 Augsburg
GERMANY

Tel.: +49 821 99972360
Fax: +49 821 99972369

E-mail: sales@a-s-p.solar
Web: www.a-s-p.solar

