




AOLI SOLAR

## Monocrystalline Solar Cells



### 156.75mm 5BB



Eff (%)	Pmpp (W)	Umpp (V)	Impp (A)	Uoc (V)	Isc (A)
≥ 22.00%	5.38	0.578	9.342	0.679	9.847
21.90%	5.35	0.577	9.329	0.678	9.832
21.80%	5.33	0.576	9.303	0.676	9.818
21.70%	5.30	0.575	9.303	0.676	9.803
21.60%	5.28	0.574	9.291	0.674	9.788
21.50%	5.25	0.573	9.279	0.674	9.774
21.40%	5.23	0.571	9.269	0.673	9.759
21.30%	5.20	0.569	9.255	0.672	9.744
21.20%	5.18	0.567	9.244	0.671	9.730
21.10%	5.16	0.566	9.205	0.670	9.724

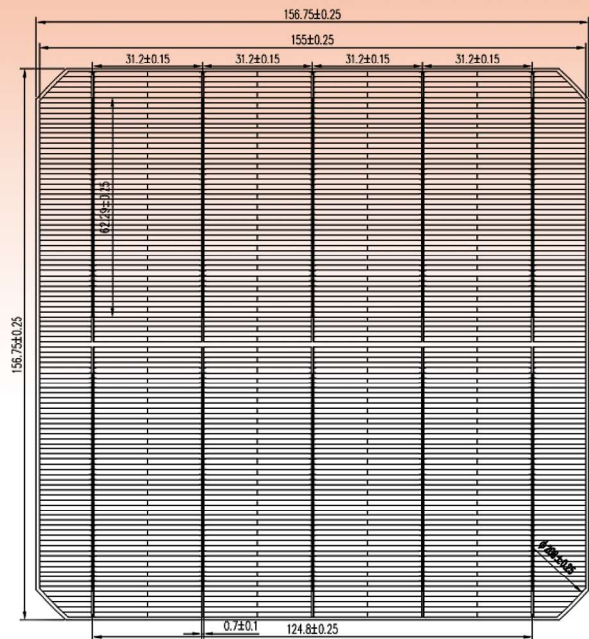

Format	156.75x156.75mm±0.25mm
Thickness	190mm±30um
Front	5*0.7mm busbar(silver),108 fingers,blue silicon nitride anti-reflection coating(PID free)
Back	Back electrode width (silver) 1.8mm, back cover aluminum back field

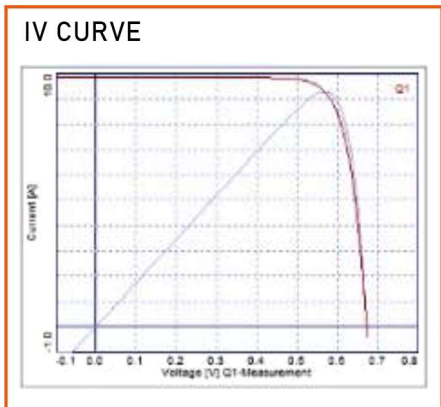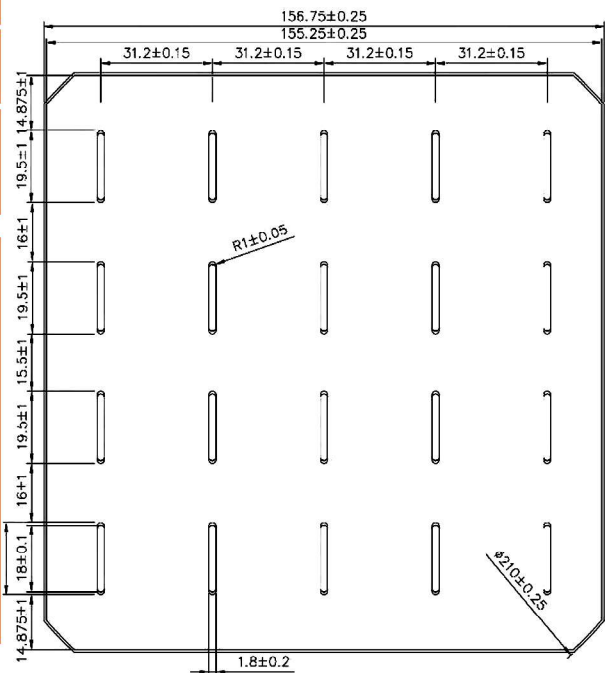

Intensity(W/m <sup>2</sup> )	Uoc	Isc
1000	1.000	1.000
900	0.996	0.903
800	0.991	0.803
600	0.988	0.602
400	0.962	0.403

AOLI SOLAR WITH HIGH PERFORMANCE

[www.aolisolar.com](http://www.aolisolar.com)

Head Office:Rm 2506,Unit A ,Tianning Times Building,Changzhou City,JiangSu,China

Factory Add: C1 Buliding,Science & Technology Zone,Changzhou City,JiangSu,China

Email:info@aolisolar.com