

Hyundai Solar Module

MF-Series

Poly-crystalline Type

HiS-M205MF | HiS-M208MF | HiS-M210MF | HiS-M213MF | HiS-M215MF | HiS-M220MF | HiS-M225MF

Mono-crystalline Type

HiS-S215MF | HiS-S218MF | HiS-S220MF | HiS-S223MF | HiS-S225MF | HiS-S230MF

Mechanical Characteristics

Dimensions	983 mm (38.7")(W) × 1,476 mm (58.11")(L) × 35 mm (1.38")(H)
Weight	Approx. 17.0 kg (37.5 lbs)
Solar cells	54 cells in series (6 × 9 matrix)
Output cables	4 mm ² (12AWG) cables with polarized weatherproof connectors, IEC certified (UL listed), Length 1.0 m (39.4")
Junction box	IP65, weatherproof, IEC certified (UL listed)
Bypass diodes	3 bypass diodes to prevent power decrease by partial shade
Construction	Front : High transmission low-iron tempered glass, 3.2 mm (0.126") Encapsulant : EVA Back Sheet : Weatherproof film
Frame	Clear anodized aluminum alloy type 6063

High Quality

- IEC 61215 (Ed.2) and IEC 61730 by TÜV Rheinland
- UL listed (UL 1703), Class C Fire Rating
- Output power tolerance +3/-0 %
- ISO 9001:2000 and ISO 14001:2004 Certified
- Advanced Mechanical Test (5,400 Pa) Passed (IEC)
/ Mechanical Load Test (40 lbs/ft²) Passed (UL)
- Ammonia Corrosion Resistance Test Passed
- IEC 61701 (Salt Mist Corrosion Test) Passed

Fast and Inexpensive Mounting

- Delivered ready for connection
- Pre-confectioned cables
- IEC (UL) certified and weatherproof connectors
- Integrated bypass diodes

Limited Warranty

- 10 years for product defect
- 10 years for 90 % of warranted min. power
- 25 years for 80 % of warranted min. power

※ Important Notice on Warranty

The warranties apply only to the PV modules with Hyundai Heavy Industries Co., Ltd.'s logo (shown below) and product serial number on it.



Electrical Characteristics

| Poly-crystalline Type |

		HiS-M□□□MF						
		205	208	210	213	215	220	225
Nominal output (Pmpp)	W	205	208	210	213	215	220	225
Voltage at Pmax (Vmpp)	V	27.1	27.1	27.3	27.4	27.6	27.9	28.2
Current at Pmax (Impp)	A	7.6	7.7	7.7	7.8	7.8	7.9	8.0
Open circuit voltage (Voc)	V	33.1	33.2	33.3	33.5	33.6	34.0	34.2
Short circuit current (Isc)	A	8.1	8.2	8.2	8.3	8.3	8.4	8.5
Output tolerance	%	+3/-0						
No. of cells & connections	pcs	54 in series						
Cell type	-	6" Poly-crystalline silicon						
Module efficiency	%	14.1	14.3	14.5	14.7	14.8	15.2	15.5
Temperature coefficient of Pmpp	%/K	-0.43	-0.43	-0.43	-0.43	-0.43	-0.43	-0.43
Temperature coefficient of Voc	%/K	-0.32	-0.32	-0.32	-0.32	-0.32	-0.32	-0.32
Temperature coefficient of Isc	%/K	0.048	0.048	0.048	0.048	0.048	0.048	0.048


※All data at STC (Standard Test Conditions). Above data may be changed without prior notice.

| Mono-crystalline Type |

		HiS-S□□□MF					
		215	218	220	223	225	230
Nominal output (Pmpp)	W	215	218	220	223	225	230
Voltage at Pmax (Vmpp)	V	27.3	27.6	27.6	27.6	27.8	28.1
Current at Pmax (Impp)	A	7.9	7.9	8.0	8.1	8.1	8.2
Open circuit voltage (Voc)	V	33.5	33.6	33.6	33.7	33.7	33.8
Short circuit current (Isc)	A	8.4	8.4	8.5	8.5	8.6	8.7
Output tolerance	%	+3/-0					
No. of cells & connections	pcs	54 in series					
Cell type	-	6" Mono-crystalline silicon					
Module efficiency	%	14.8	15.0	15.2	15.4	15.5	15.9
Temperature coefficient of Pmpp	%/K	-0.45	-0.45	-0.45	-0.45	-0.45	-0.45
Temperature coefficient of Voc	%/K	-0.33	-0.33	-0.33	-0.33	-0.33	-0.33
Temperature coefficient of Isc	%/K	0.032	0.032	0.032	0.032	0.032	0.032


※All data at STC (Standard Test Conditions). Above data may be changed without prior notice.

| Module Diagram |

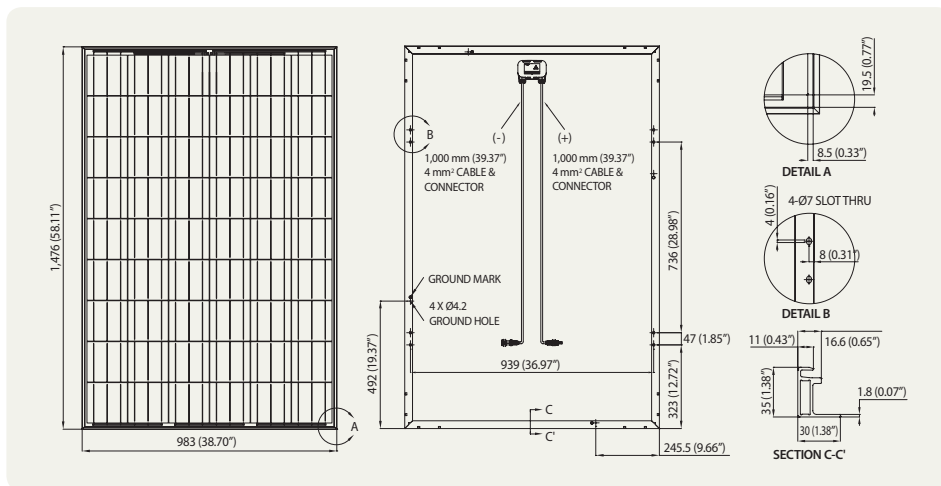

(unit : mm, inch)

| I-V Curves |

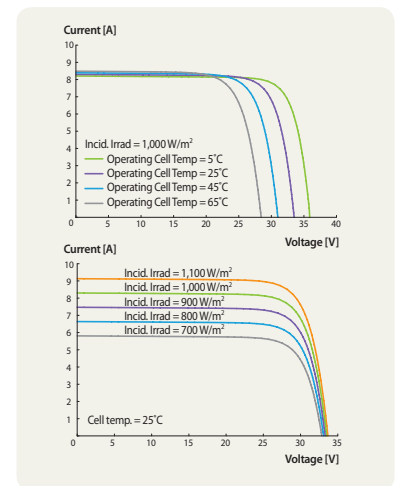

| Installation Safety Guide |

- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not damage or scratch the rear surface of the module.
- Do not handle or install modules when they are wet.

Nominal Operating Cell Temperature	46°C ± 2
Operating Temperature	-40 - 85°C
Maximum System Voltage	DC 1,000 V (IEC) DC 600 V (UL)
Maximum Reverse Current	15 A

[Latest Update : July 2012]



Sales & Marketing
 12th Fl., Hyundai Bldg., 75, Yulgok-ro, Jongno-gu, Seoul 110-793, Korea
 Tel : +82-2-746-8406, 7422 Fax : +82-2-746-7675

