


## DS-A18-5 Panels Specifications

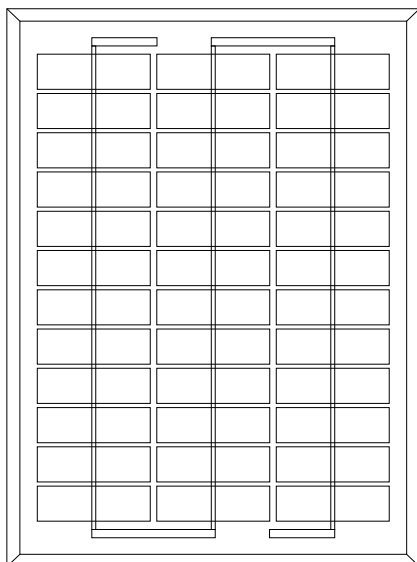

**Solar cells:** Poly crystalline solar cells

**Laminate:** Glass /EVA / TPT (tedlar/pet/tedlar) or TPE

**Front Side:** High-transmission 3.2mm tempered glass

**Back Side:** TPT /TPE

**Frame:** Clear anodized aluminum frame

**Output:** junction box

Module Type	Pm(Wp)±10%	Vmpp(V)	Impp(A)	Voc(V)	Isc(A)	Module size(mm)	NET(kg)
DS-A18-5	5	18.0	0.28	22.3	0.3	270*190*18mm 10.6"*7.5"*0.7"	0.7

**Operation Temperature Range:** - 40℃~85℃


**NOCT:** 48℃±3℃

**Temperature coefficients of Im:** + 0.1 %/℃

**Temperature coefficients of Vm:** - 0.38 %/℃

**Maximum System Voltage:** DC600V

**STC:** 1000W/m<sup>2</sup>, 25℃, AM1.5

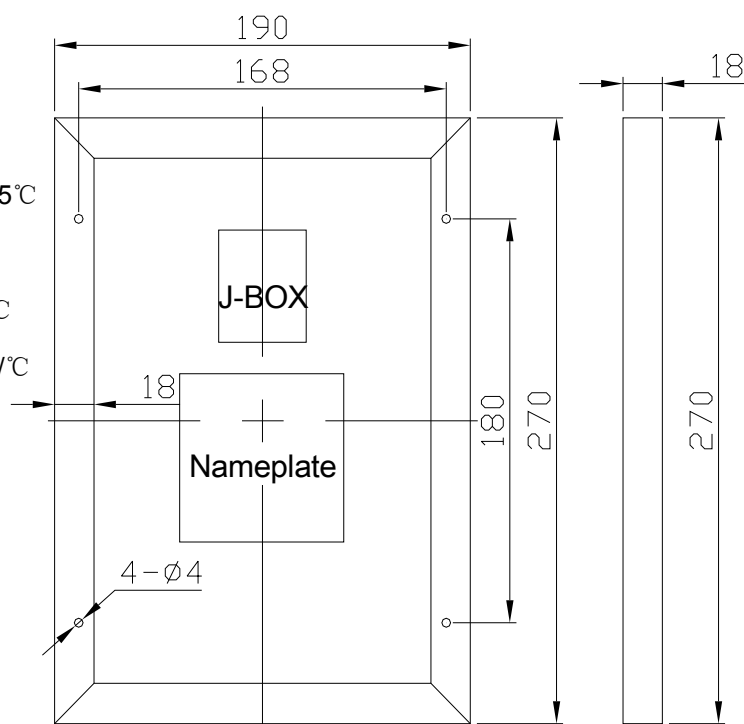

All the data of this sheet are subjected to change without notice.

Anji DaSol Solar Energy Science & Technology Co., Ltd.