


DS-A36-80 Panels Specifications

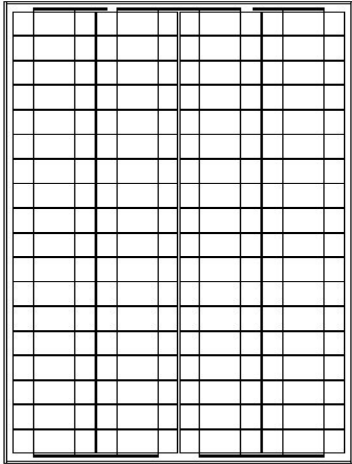

Solar cells: Polycrystalline solar cells

Laminate: Glass /EVA / TPT (tedlar/pet/tedlar) or TPE

Front Side: High-transmission 3.2mm tempered glass

Back Side: TPT /TPE

Frame: Clear anodized aluminum frame

Output : Junction box

Module Type	Pm(Wp)±5%	Vmpp(V)	Imp(A)	Voc(V)	Isc(A)	Module size	NET(kg)
DS-A36-80	80	36.0	2.22	44.6	2.42	890*665*35 (mm) 35.0*26.2*1.38 (inch)	7.1

Operation Temperature Range: - 40°C ~85°C


NOCT: 48°C ±3°C

Temperature coefficients of Im: + 0.1 %/°C

Temperature coefficients of Vm: - 0.38 %/°C

Maximum System Voltage: DC600V

STC: 1000W/m², 25°C, AM1.5

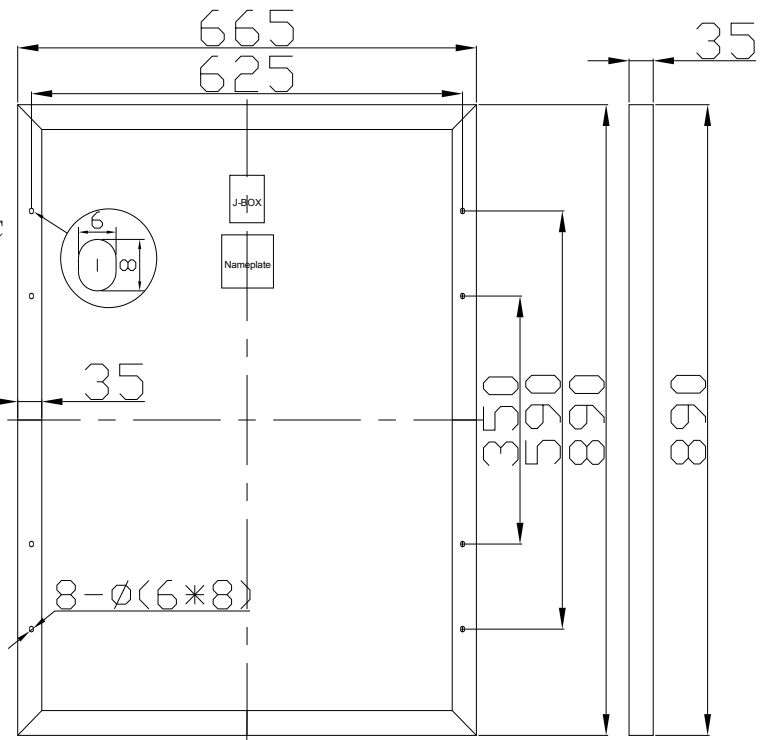

All the data of this sheet are subjected to change without notice.