


# Technical Description



## Photovoltaic Module NP46RSS

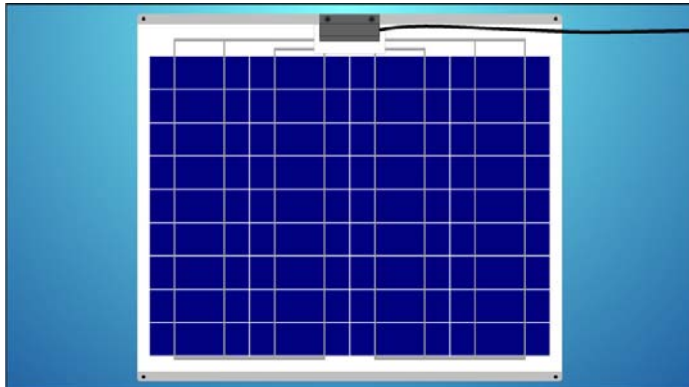

**36 polycrystalline Si solar cells**

**Main application: boat deck PV systems**

### Module Electrical Performance under Standard Test Conditions

*Refers to standard test conditions of 1000 Wm<sup>-2</sup> solar irradiance, 25°C cell temperature, Air Mass 1.5.*

*Note: Maximum power point is subject to +10%/-5% variation. All other values are typical and for guidance only.*

Maximum Power Point: 46 Watts, 2.54 Amps at 18.1 Volts.

Short Circuit: 2.76 Amps. Open circuit: 22.0 Volts.

### Dimensions and Weight

*all dimensions +/- 2mm, weight approximately +/-0.3kg*

Length: 596mm. Width: 670mm. Thickness at edge: 3.67mm. Weight: 5.7kg

### Construction

Top cover material: Tefzel

Rear cover material: St.Steel1.5mm

Encapsulant (lamination material): EVA

Frame: no

2 factory-fitted bypass diodes

1 junction box type hat

cable 2m

### Integral mounting holes

Along length: 582mm centre to centre, 7mm centre to module edge.

4 holes, size 5.5mm.

Across width: 650mm centre to centre, 10mm centre to module edge.

### Cell circuit

Cut from full size cells into 1/3 of a cell

Cell dimensions: Length (tab direction) 52mm. Width: 156mm.

Electrical circuit: 36 cells in series

Cell layout: 4 rows, each row is 9 cells long.

### Normal Operating Cell Temperature (NOCT)

45°C

*error in measurement around +/- 2°C*

*Cell temperature at 800Wm<sup>-2</sup> solar irradiance, 20°C ambient temperature, wind speed <=1ms<sup>-1</sup>, free air access to rear.*

### Efficiencies based on Standard Test Conditions Rating

Module: 11.5%

Laminated area: 12.2%

Cells alone: 15.8%

*Note: Standard Test Conditions efficiency figures should only be used to compare one module with another. These efficiency figures do not apply to actual field performance, for which a careful analysis of operating conditions is necessary to determine the effects of module temperature and other factors.*

*Specifications may change due to Naps policy of continuous product improvement.*

*Please check current specification before purchasing.*

*Information last updated: 26-Nov-10*

**Naps Systems Oy, Pakkalankuja 7A, FIN-01510 Vantaa, Finland**

**Tel +358 20 7545 666, Fax +358 20 7545 660, [www.napssystems.com](http://www.napssystems.com)**