

SETSOLAR manufactures its own photovoltaic modules using guaranteed and certified materials.

This module meets industry standards for consumer safety and reliability and is covered by a comprehensive 20 year warranty.

Low-iron tempered glass is designed to resist impact and increase light transmittance, thus improving daily power generation.

Encapsulating the solar cells between Tempered Glass / EVA / Tedlar guarantees a durable protection for the cells during extreme weather conditions.

The strong aluminium frame with pre-drilled mounting holes allow for easy installation.

Each solar module is equipped with a special IP55 junction box and protective bypass diodes.

Furthermore is each solar module submitted to an individual quality inspection, certifying product quality and output power performance.


Modules designed and manufactured according to IEC 61215 & IEC 61730 standards.

APPLICATIONS

- Pumping ●
- Beaconing ●
- Rural Electrification ●
- Telecommunication ●
- Grid connected systems ●
- Professional Applications ●

CONTACT US

Unit 8, 98b Bofors Circle, Epping Ind. 2
Cape Town, South Africa, 7460
Tel: 021 535 1978 or 021 535 1741
Admin Fax: 021 534 0233
Sales Fax: 021 534 5730
Int: +27 21 535 1794
info@setsolar.co.za
www.setsolar.co.za

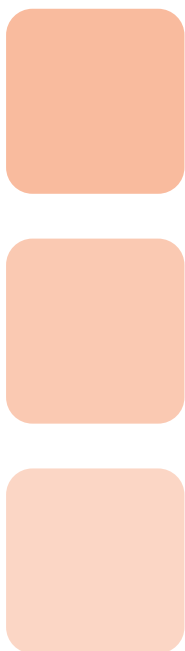

SETSOLAR M1300P

TYPICAL PERFORMANCE CHARACTERISTICS

Typical power (Wp)	110	115	120	125	130	135	140
Tolerance (%)	+- 5%						
Voltage at max.power (V)	16.8	17.0	17.2	17.4	17.6	17.8	18.0
Current at max.power (A)	6.60	6.80	7.00	7.20	7.40	7.60	7.80
Open circuit voltage (Voc)	21.1	21.3	21.5	21.7	21.9	22.1	22.3
Short circuit current (Isc)	7.00	7.20	7.40	7.60	7.80	8.00	8.20

Standard test conditions: 1000W/m², AM1.5G and 25 degree C

TEMPERATURE COEFFICIENTS

Voltage	-79.20mV / degree C
Current	+4.50mA / degree C
Power	-0.46% / degree C
NOCT (degrees)	45

CELLS



Type	Texturized multicrystalline
Dimensions	156mm x 156mm
Layout	36 cells (4rows x 9cells)

GENERAL INFORMATION

Maximum System voltage	715V
Diodes	2 x 10A bypass
Type of connection	Junction box
Frame	38mm black powder-coated aluminium
Weight (kg)	11
Packaging	2 modules per carton box

WARRANTY

Product	5 years
Power output	Terrestrial: 20 years / 80% yield Marine: 10 years / 90% yield

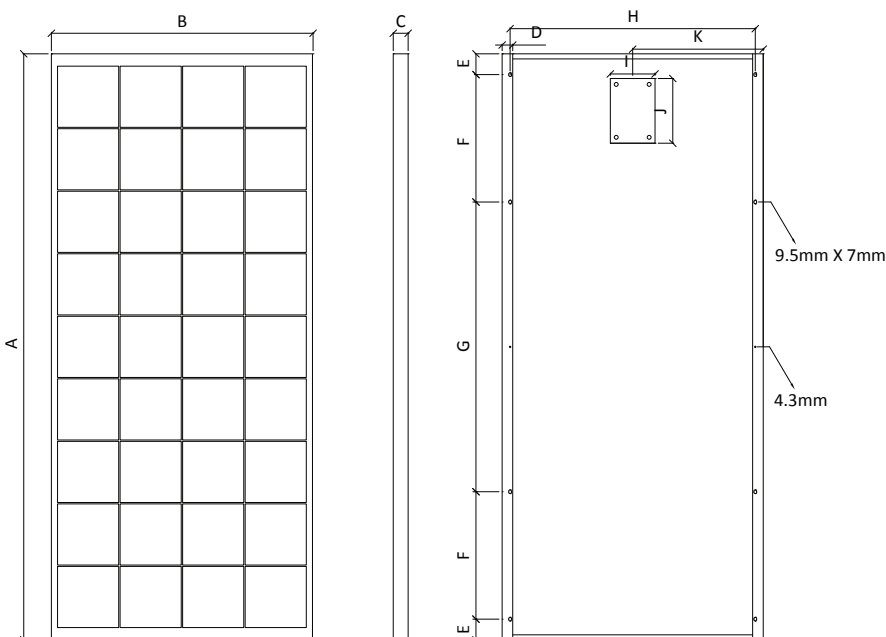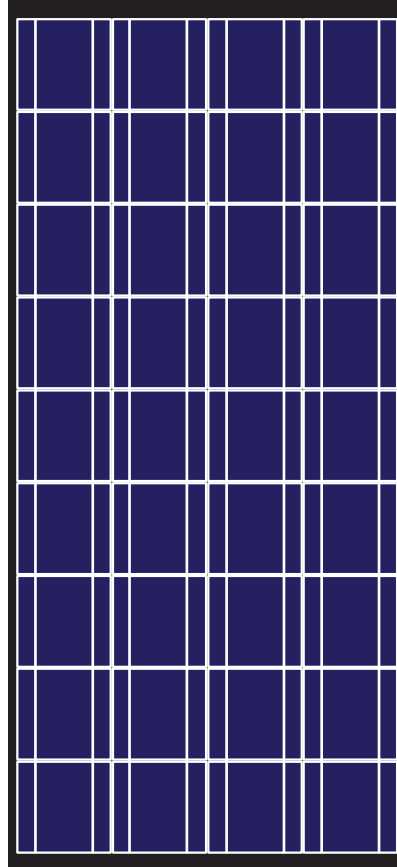

DIMENSIONS

A	1486
B	675
C	38
D	27
E	51
F	325
G	734
H	635
I	115
J	165
K	337.5

Dimensions in mm
(tolerance +-2mm)