

Building, Room 1012 Led Solar Silicon Valley Queshan Dalang Longhua ShenZhen

Web:www.zhihesolar.com


<b>Model(ZH240CE-33P)Specifications</b>	
<b>ITEM NO.:</b>	<b>ZH240CE-33P</b>
Maximum Power(W)	240
Optimum Power Voltage(Vmp)	33.00
Optimum Operatige Current(Imp)	7.27
Open Circuit Voltage(Voc)	39.86
Short Circuit Current(Isc)	7.78
Solar Cell:	156*156 Poly
Number of Cell(pcs)	6*11
Brand Name of Solar Cells	Jetion Cell
Size of Module(mm)	1800*990*46
Front Glass Thikness(mm)	3.2
Temperature Coefficients of Isc(%)°C	+0.04
Temperature Coefficients of Voc(%)°C	-0.38
Temperature Coefficients of Pm(%)°C	-0.47
Temperature Coefficients of Im(%)°C	+0.04
Temperature Coefficients of Vm(%)°C	-0.38
Temperature Range	-40°C to +85°C
Tolerance Wattage(e.g./-5%)	±5%
Surface Maximum Load Capacity	2400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	20.6
Bypass Diode Rating(A)	12
Cell Efficiency (%)	14.94%
Module Efficiency (%)	13.46%
Frame(Material Corners,etc.)	46#
Backing (Brand Type)	TPT
Warranty	90% of 10 years,80% of 25 years.
Standard Test Conditions	AM1.5 1000W/m <sup>2</sup> 25 +/-2°C
FF (%)	70-76%
Packing	Wooden box
1*20'	12Pallets / 324pcs
1*40'HQ	24 Pallets / 648pcs

**Model(ZH240CE-33P)  
Specification**

**ZhiHe Solar Module**

**Using high quality materials to  
provide high quality solar modules**

- 1.Solar cells:Jetion cells
- 2.Glass:Fiat 's from Shanghai
- 3.EVA:First Hot-Melt Adhesive from Hangzhou China
- 4.TPT:JOLYWOOD from Suzhou,China
- 5.Junction box and connectors:GZX from Cixi,China or Rehe from Cixi,China
- 6.Silica gel:Dow Corning

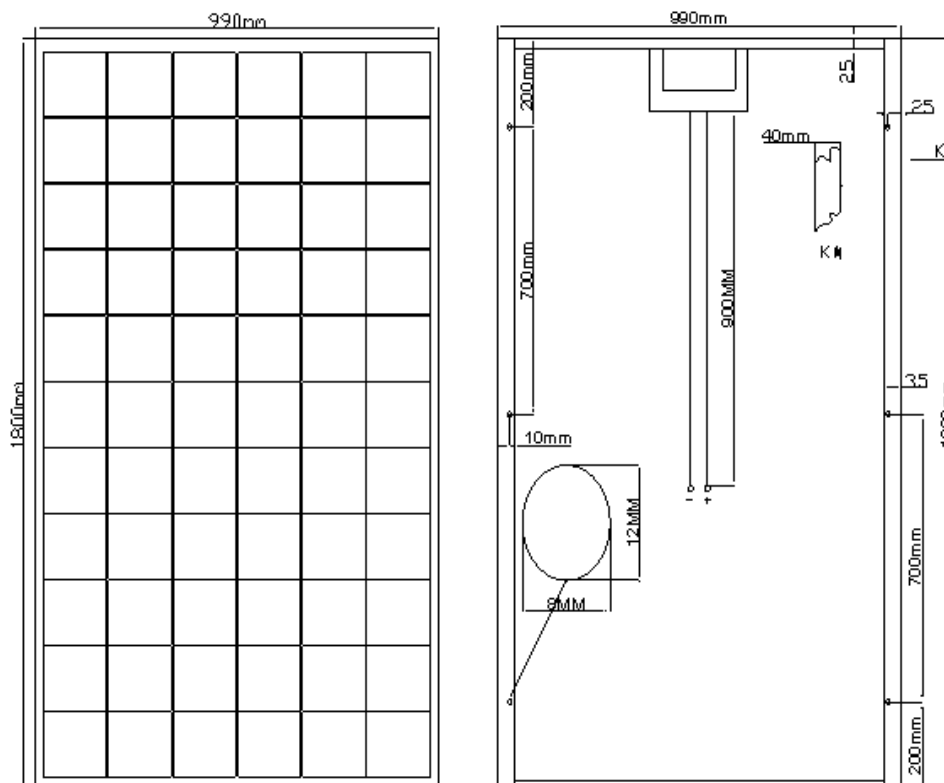

### IV Curve

