
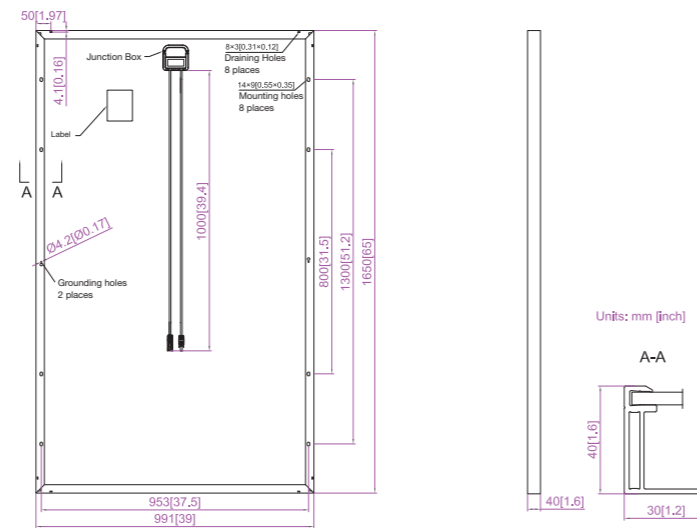


Engineering Drawings

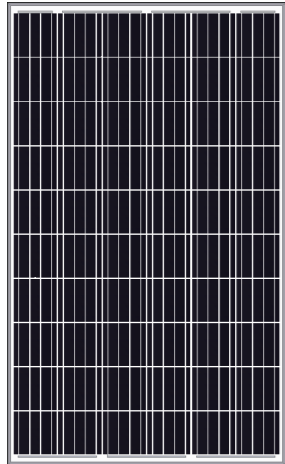

MECHANICAL PARAMETERS

Cell (mm)	Poly 156x156
Weight (kg)	18.2 (approx)
Dimensions (L×W×H) (mm)	1650×991×40
Cable Cross Section Size (mm ²)	4
No. of Cells and Connections	60 (6×10)
Junction Box	IP67, 3 diodes
Connector	MC4 Compatible
Packaging Configuration	26 Per Pallet




WORKING CONDITIONS

Maximum System Voltage	DC 1000V (IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	15A
Maximum Static Load, Front Maximum Static Load, Back	5400Pa (112 lb/ft ²) 2400Pa (50 lb/ft ²)
NOCT	45±2°C
Application Class	Class A

ELECTRICAL PARAMETERS

TYPE	JAP6 60-260/4BB/RE	JAP6 60-265/4BB/RE	JAP6 60-270/4BB/RE	JAP6 60-275/4BB/RE	JAP6 60-280/4BB/RE
Rated Maximum Power at STC (W)	260	265	270	275	280
Open Circuit Voltage (Voc/V)	37.98	38.14	38.30	38.46	38.85
Maximum Power Voltage (Vmp/V)	30.55	30.89	31.21	31.54	31.88
Short Circuit Current (Isc/A)	9.04	9.10	9.16	9.22	9.33
Maximum Power Current (Imp/A)	8.51	8.58	8.65	8.72	8.78
Module Efficiency [%]	15.90	16.21	16.51	16.82	17.12
Power Tolerance (W)	-0~+5W				
Temperature Coefficient of Isc (αIsc)	+0.058%/°C				
Temperature Coefficient of Voc (βVoc)	-0.330%/°C				
Temperature Coefficient of Pmax (γPmp)	-0.420%/°C				
STC	Irradiance 1000W/m ² , Module Temperature 25°C, Air Mass 1.5				


I-V CURVE

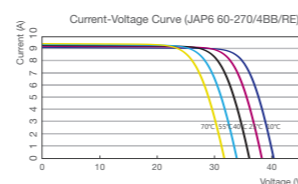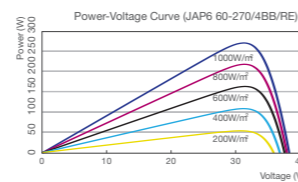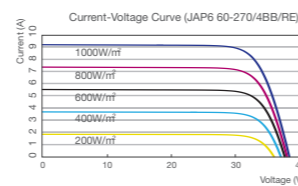

NOCT

TYPE	JAP6 60-260/4BB/RE	JAP6 60-265/4BB/RE	JAP6 60-270/4BB/RE	JAP6 60-275/4BB/RE	JAP6 60-280/4BB/RE
Max Power (Pmax) [W]	189.28	192.92	196.56	200.20	204.13
Open Circuit Voltage (Voc) [V]	34.88	35.03	35.19	35.37	35.68
Max Power Voltage (Vmp) [V]	27.91	28.07	28.23	28.41	28.66
Short Circuit Current (Isc) [A]	7.25	7.28	7.31	7.34	7.38
Max Power Current (Imp) [A]	6.78	6.87	6.96	7.05	7.12
Condition	Under Normal Operating Cell Temperature, Irradiance of 800 W/m ² , spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s				

270W Multi 60Cells
15W > Average

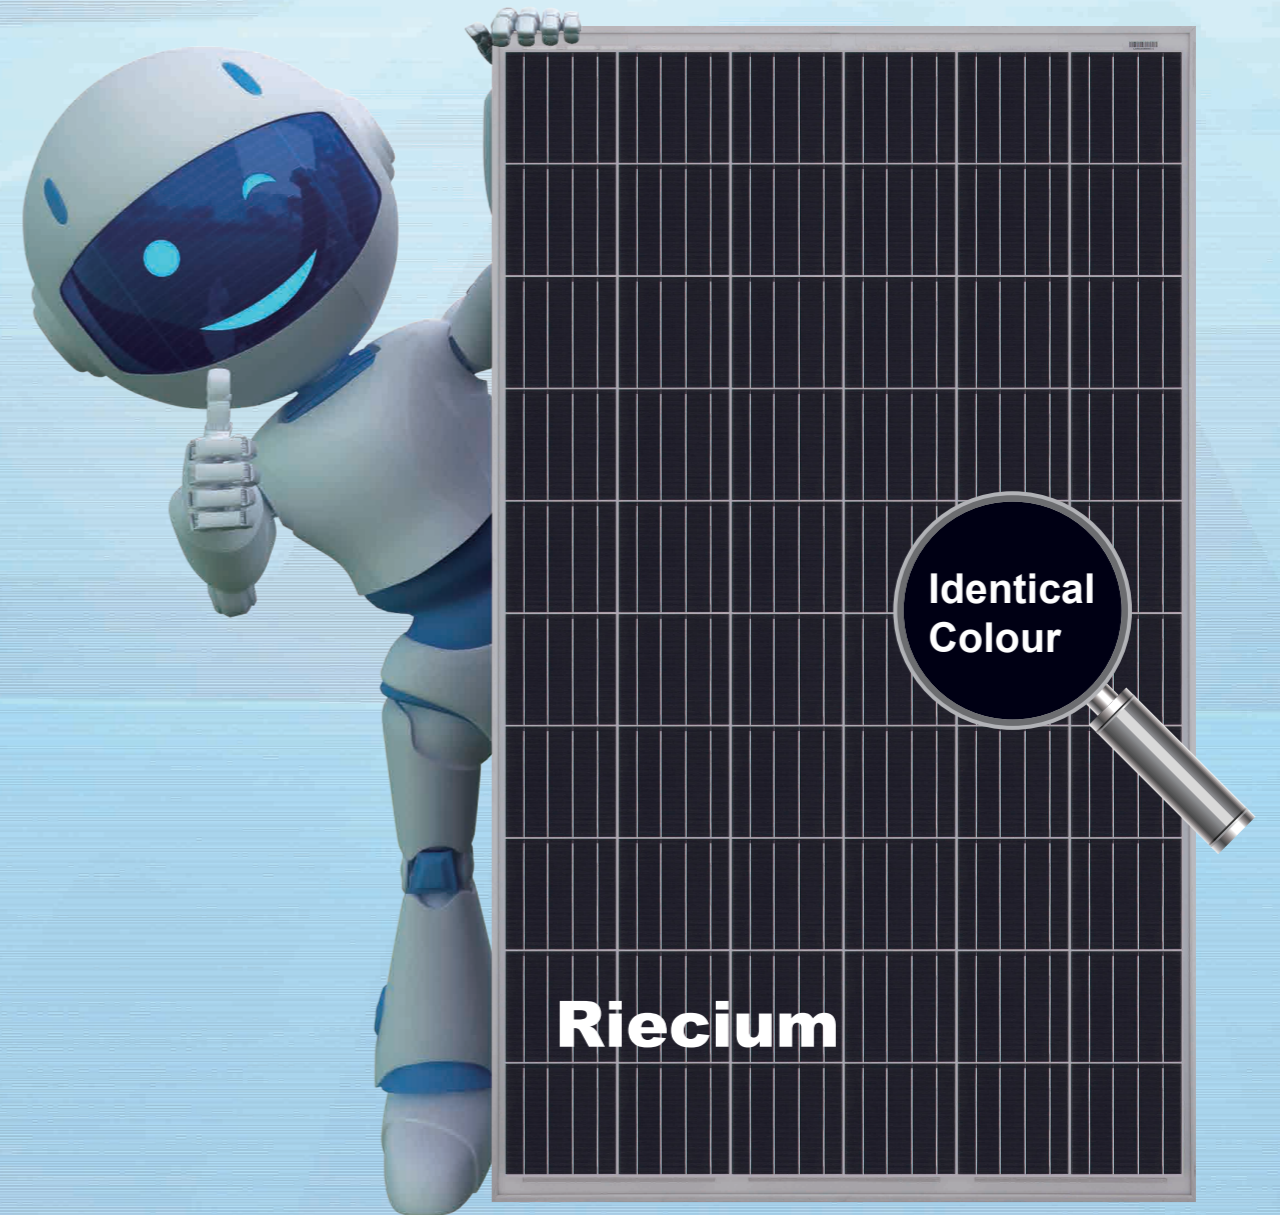


Harvest the Sunshine
Premium Cells, Premium Modules

Riecium Cell

- The latest high efficiency Black Silicon Multi-crystalline cells technology
- >18.6% average mass production efficiency
- Superior cosmetic appearance similar to Mono-crystalline modules


Average Mass Production Efficiency>18.6%

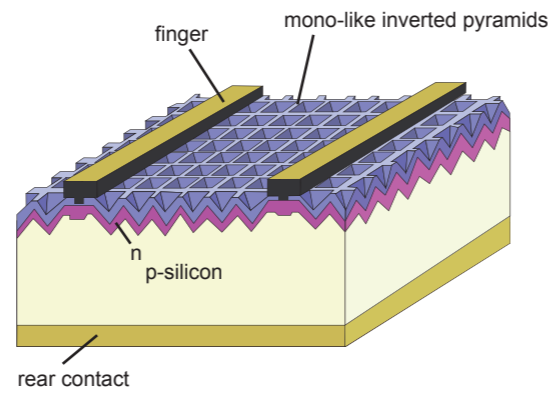

More Power Per m²

Higher conversion efficiency - more power production per unit area

Benefit: 6% More Power

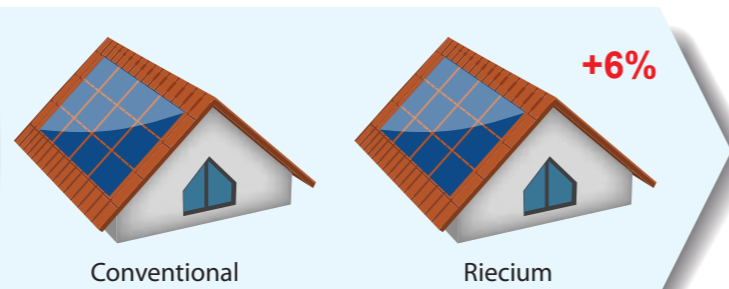


Riecium module 270Wp VS conventional module 255Wp

Lower System Cost

Higher conversion efficiency help you save

- Transportation cost
- Land cost
- Installation cost
- BOS cost

Benefit: Save System Costs Per Watt

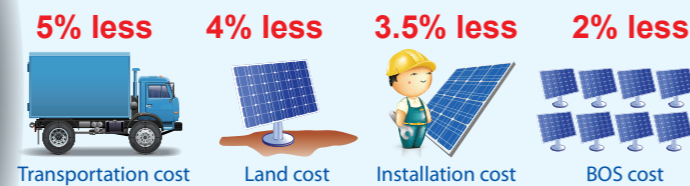


Cost saving estimation made by comparison between 255Wp and 270Wp modules

Superb PID-resistant Performance

- Riecium module passes the 500-hour PID Test conducted by TÜV SÜD(85%RH 85°C -1000V 500Hr).
- All Riecium modules guarantee passing double IEC62804 PID test (85%RH 85°C -1000V 192Hr)

Benefit: Ultra Low Degradation After PID Test

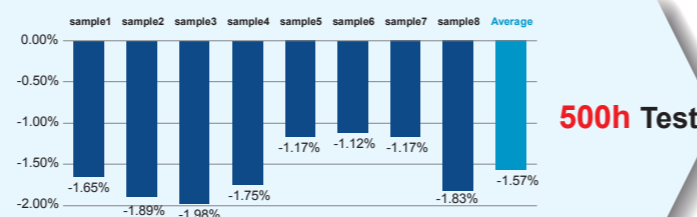

RIECIUM Module Degradation After 500-hour PID Test (Test Condition: 85%RH 85°C -1000V 500Hr)



High Reliability

- Long-term reliability tests
- Harsh climate environment endurance tests
- PID-resistance tests
- Certified by TÜV SÜD and ETL
- Industry-leading cell technology
- High quality components from best suppliers
- Manufacturing inspected and certified by PI-Berlin and Solar-IF
- 100% in-house automatic manufacturing
- 2X 100% EL inspection ensuring defect-free



Other Features

- Positive power tolerance: 0~+5W
- Modules binned by current to improve system performance
- Excellent mechanical load resistance: Certified to withstand high wind loads (2400Pa) and snow loads (5400Pa)

Comprehensive Certificates

- IEC 61215, IEC 61730, UL1703, CEC Listed, MCS and CE
- ISO 9001: 2008: Quality management systems
- ISO 14001: 2004: Environmental management systems
- BS OHSAS 18001: 2007: Occupational health and safety management systems
- Environmental policy: The first solar company in China to complete Intertek's carbon footprint evaluation program and receive green leaf mark verification for our products



Specifications subject to technical changes and tests. JA Solar reserves the right of final interpretation.


JA Solar Holdings Co., Ltd.

JA Solar Holdings Co.,Ltd is a world leading manufacturer of high-performance solar power products that convert sunlight into electricity for residential, commercial and utility-scale power generation. The company was founded in May 2005 and publicly listed on NASDAQ in February 2007. JA Solar has been the world's leading cell producer since 2010, and has firmly established itself as a tier 1 module supplier since 2012. Capitalizing on our strength in solar cell technology, we are committed to provide modules with unparalleled conversion efficiency, yield efficiency, and reliability to enable you to maximize your returns on PV projects. With its leading industry experience, continuous effort on R&D, customer-oriented service and sound financial status, JA Solar is your best choice of long-term trustworthy partner.

Add : NO.36, Jiang Chang San Road, Zhabei, Shanghai 200436, China
Tel : +86 21 6095 5888 / +86 21 6095 5999
Fax : +86 21 6095 5858 / +86 21 6095 5959
Email : sales@jasolar.com market@jasolar.com

Product Warranty

- 10-year product warranty
- 25-year linear power warranty

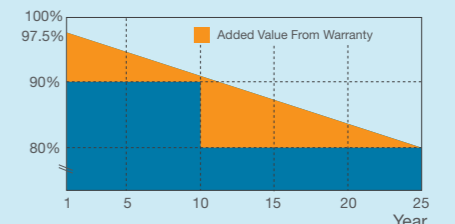

Additional Insurance Options



Partner Section