

30-35 Watt

POLY CRYSTALLINE MODULE 36x(77mmx78mm)




www.risenenergy.com
THE POWER OF RISING VALUE



Electrical Characteristics

Model	Pm(Wp)	Tolerance	Vm(V)	Im(A)	Voc(V)	Isc(A)
SYP30S	30W	+3%	17.9	1.68	21.9	1.87
SYP35S	35W	+3%	18.0	1.95	22.3	2.19

Valued at STC (AM 1.5, 1000W/m², 25°C)

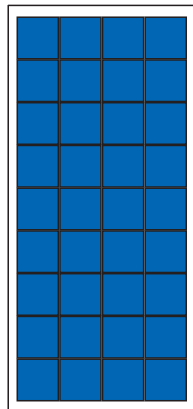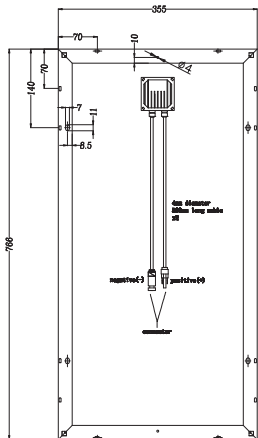

Specifications

- Number of poly crystalline solar cell 36pcsx(77mmX78mm)
- Aluminum frame, dimension 766x355x25mm
- Weight 4.0kg
- Temperature coefficient of VOC(β) = -0.39%/°C
- Temperature coefficient of ISC(α) = +0.033%/°C
- Temperature coefficient of Pmax = -0.44%/°C
- Bypass diodes to reduce loss in partial shadow
- IP65
- CE Standard
- Performance test data for each module