

Model No.: SW120P

Sunworth solar, we commit ourselves to R&D, manufacture and technical innovation on pv modules and solar power system. To provide high quality products with various specifications to customers is always our pursuit.

Characteristics:

- Use high quality solar cells to advanced encapsulation
- Adopt high transparent low-iron tempered glass, high quality anti-UV EVA and back sheet.
- With multi-ply performance testing for each module, to ensure the product quality and output performance.
- Using anodization aluminum frame with anticorrosion, to ensure solar module working under extremely and badly outdoors environment

Warranty:

- Guarantee the workmanship for 3 years, 90% power output for 10years, and 80% power output for 20years.

Rev1.1 2013



Production application:

- Solar power system
- Other small solar power supply
- Solar lighting, i.e. solar garden lamp, solar lawn lamp etc.

Electrical characteristics:

	SW120P
Max-power: Pm(W)	120W
Max-power voltage: Vm(V)	18.1V
Max-power current: Im(A)	6.63A
Open-circuit voltage: Voc(V)	21.8V
Short-circuit current: Isc(A)	7.21A
Max-system voltage(VDC)	800V
Operating temperature(°C)	-40~+85°C
Power tolerance(%)T	0~+6W


*STC condition: 1000 W/m², 1.5AM and 25°C cell temperature.

Mechanical characteristics:

Type of solar cell	Polycrystalline
Lay up of solar cell	36(4*9)PCS
Dimension of solar module	1320*665*30mm
Gross weight of solar module	9.9Kg
Front Cover	Low-iron Tempered glass/ 3.2mm
Frame	Anodization aluminum
Junction Box (protection degree)	IP65
Hailstone Impact	25mm at 23m/s
Qty/CTN	2 PCS

Rev1.1 2013

I-V curves:

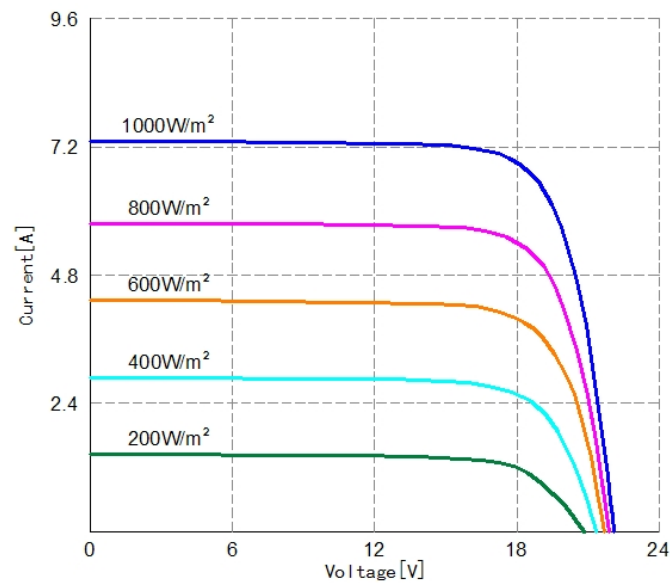

Dimensions:

