



## Poly-crystalline Solar Module

ED70-6P  
ED75-6P  
ED80-6P

### Warranty


10-year repair and workmanship warranty  
12-year warranty at 90% power output  
25-year warranty at 80% power output



### Typical Electrical Characteristics


Models	ED70-6P	ED75-6P	ED80-6P
Max. Power (Pmax)	70Wp	75Wp	80Wp
Optimum Operating Voltage (Vm)	17.2V	17.5V	18.1V
Optimum Operating Current (Im)	4.07A	4.29A	4.42A
Open-circuit Voltage (Voc)	21.6V	22.4V	22.6V
Short-circuit Current (Isc)	4.31A	4.54A	4.68A
Module efficiency	13.6%	14.6%	15.5%

Note: the specifications are obtained under the Standard Test Condition (STC): 1,000W/m<sup>2</sup>, Am 1.5, Cell Temperature 25°C

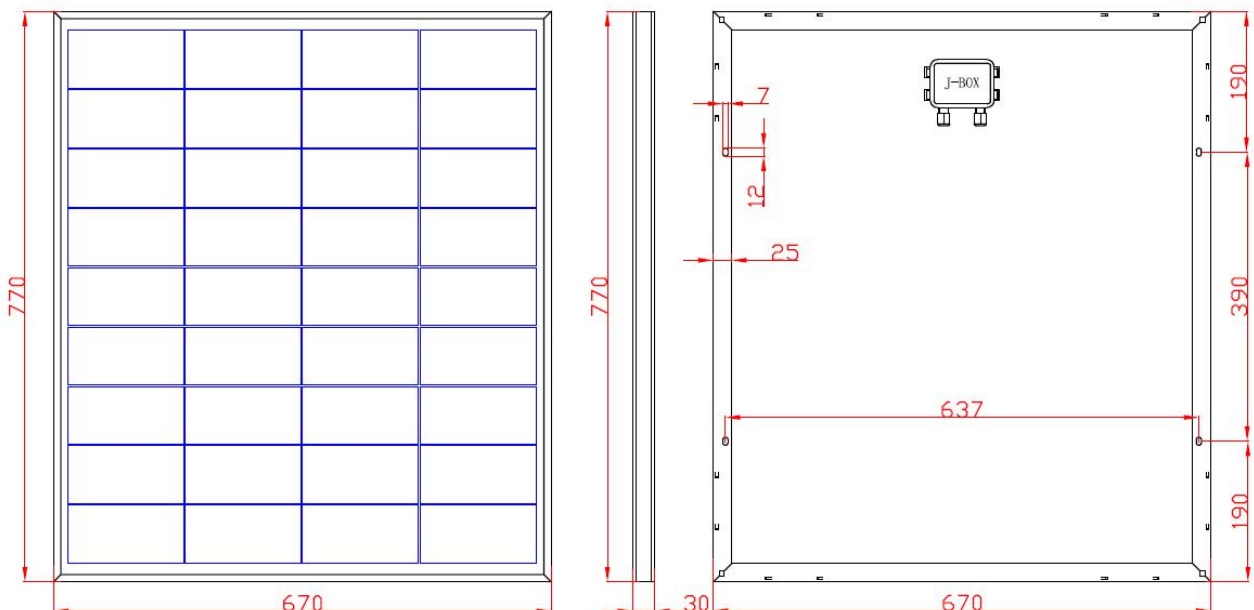

Solar cell	Poly
Power Tolerance (Pmax)	0 ~ +3%
Numbers of cells	36pcs of cells in series
Module Dimension	770×670×30mm
Weight	6Kg
Max. System Voltage	1000V DC
Max. Series Fuse Rating	—
Temperature cycling range	-40°C ~ +85°C
NOTC	47°C
Temperature coefficients of Isc	(+0.06%/°C)
Temperature coefficients of Voc	(-0.35%/°C)
Temperature coefficients of Pmax	(-0.4%/°C)
Load Capacity	704pcs/ 20'GP
	1408pcs/ 40'GP

## Certification

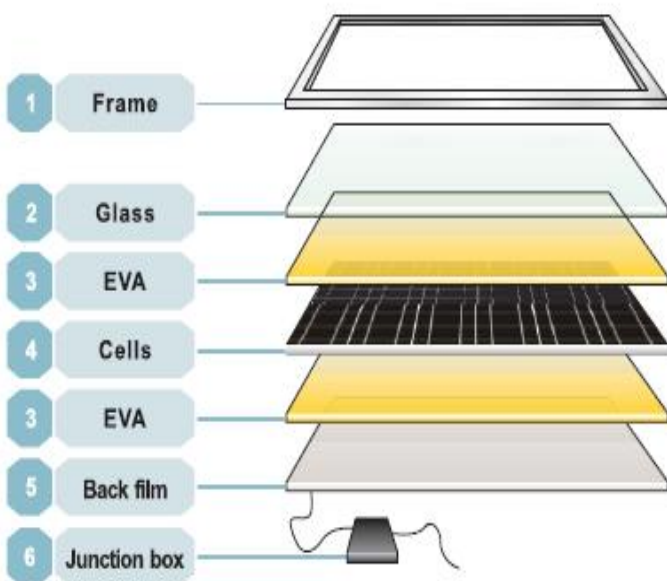

## The Structure of Solar Modules

### Cells

The hi-efficiency of mono and poly solar cells ensure adequate power for panels.

### Glass

Low-iron tempered glass, 3.2mm thickness with higher reflectivity.

### EVA

Higher transmission rate, antioxidant capacity and temperature resistance, no expansion or contraction.

### Back film

Increase efficiency of modules slightly and reduce module's temperature. Aging resistance, corrosion resistance and airtight.

### Aluminum Frame

Using the framework of the anodized aluminum frame with high intensity, mechanical shock resistance capacity.