

RSM60-6-255PDG-270PDG/4BB

60 CELL POLYCRYSTALLINE MODULE

255-270Wp POWER OUTPUT RANGE

1500VDC MAXIMUM SYSTEM VOLTAGE












16.4% MAXIMUM EFFICIENCY

About Risen Energy

Risen Energy is a leading, global tier 1 manufacturer of high-performance solar photovoltaic products and provider of total business solutions for residential, commercial and utility-scale power generation. The company, founded in 2002, and publicly listed in 2010, compels value generation for its chosen global customers. Techno-commercial innovation, underpinned by consummate quality and support, encircle Risen Energy's total Solar PV business solutions which are among the most powerful and cost-effective in the industry. With local market presence and strong financial bankability status, we are committed, and able, to building strategic, mutually beneficial collaborations with our partners, as together we capitalise on the rising value of green energy.



KEY SALIENT FEATURES


-  **Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing**
-  **Photon Independent field testing - Ranked in the top 2 of 176 international suppliers**
-  **Industry leading lowest thermal co-efficient of Power**
-  **Industry leading 12 years product warranty**
-  **Excellent low irradiance performance**
-  **Excellent PID resistance**
-  **Positive tight power tolerance of 3%**
-  **Dual stage 100% EL Inspection warranting defect-free product**
-  **Module Imp binning radically reduces string mismatch losses**
-  **Warranted reliability and stringent quality assurances' well beyond certified requirements**
-  **Certified to withstand severe environmental conditions**
 - ♦ Anti-reflective & anti-soiling surface minimise power loss from dirt and dust
 - ♦ Severe salt mist, ammonia & blown sand resistance, for seaside, farm and desert environments
 - ♦ Excellent mechanical load 2400Pa & snow load 5400Pa resistance






RISEN ENERGY CO., LTD.
 Tashan Industry Zone, Meilin,
 Ninghai 315609, Ningbo | PRC
 Tel: +86-574-59953239
 Fax: +86-574-59953599
 E-mail: marketing@risenenergy.com
 Website: www.risenenergy.com

LINEAR PERFORMANCE WARRANTY

12 year Product Warranty / 30 year Linear Power Warranty

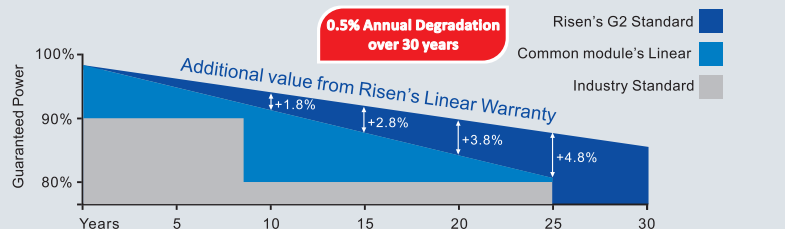

Dimension of PV Modules Unit: mm

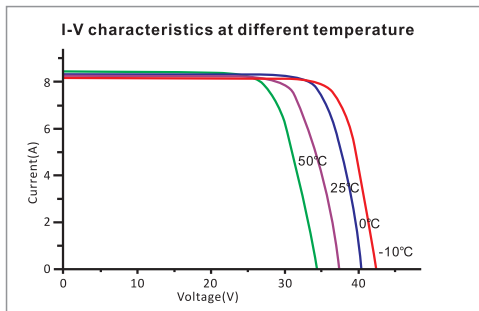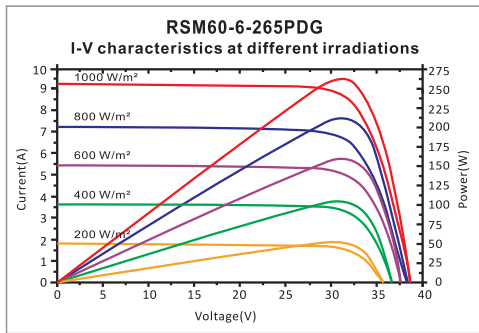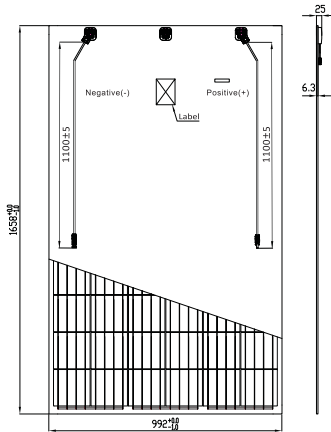

Our Partners:

ELECTRICAL DATA(STC)

Model Number	RSM60-6-255PDG	RSM60-6-260PDG	RSM60-6-265PDG	RSM60-6-270PDG
Rated Power in Watts-Pmax(Wp)	255	260	265	270
Open Circuit Voltage-Voc(V)	37.6	37.8	38.0	38.2
Short Circuit Current-Isc(A)	8.96	9.04	9.12	9.20
Maximum Power Voltage-Vmpp(V)	30.3	30.6	30.9	31.2
Maximum Power Current-Impp(A)	8.42	8.50	8.58	8.66
Module Efficiency (%)	15.5	15.8	16.1	16.4

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Model Number	RSM60-6-255PDG	RSM60-6-260PDG	RSM60-6-265PDG	RSM60-6-270PDG
Maximum Power-Pmax (Wp)	190	194	197	201
Open Circuit Voltage-Voc (V)	35.0	35.2	35.3	35.5
Short Circuit Current-Isc (A)	7.25	7.31	7.38	7.44
Maximum Power Voltage-Vmpp (V)	28.0	28.1	28.3	28.4
Maximum Power Current-Impp (A)	6.79	6.89	6.98	7.08

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Polycrystalline 156×156 mm
Cell configuration	60 cells (6×10)
Module dimensions	1658×992×6.3mm
Weight	23kg
Front Glass	2.50mm (Low iron tempered glass)
Back Glass	2.50mm (Tempered glass)
Interlayer	0.5 EVA (White or translucent)
J-Box	Potted, IP67, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² (12AWG), Positive(+) 1100mm, Negative(-) 1100mm
Connector	IP67 MC4 Compatible

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOMT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	15A
Limiting Reverse Current	15A

PACKAGING CONFIGURATION

	40ft	20ft
Number of modules per container	780	360
Number of modules per pallet	30	30
Number of pallets per container	26	12
Packaging box dimensions (LxWxH) in mm	1770×1140×1183	1770×1140×1183
Box gross weight[kg]	753	753

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2017 Risen Energy. All rights reserved. Specifications included in this datasheet are subject to change without notice.

THE POWER OF RISING VALUE