

*Green life is beautiful*



## FDS040-12P



Our company was established in 2002. We have been specializing in manufacturing solar panels, portable PV application products and solar lights for over one decade. Panels are from 1W to 300W. Both mono and poly types are available.

We own IEC, TUV, CE certificates linked with mono and poly solar panels. Our products are sold to clients in the USA, Germany, UK, Netherlands, Australia, New Zealand, Africa and Southeast Asia. We have a good reputation among our clients.

We offer high quality products at competitive prices and excellent after-sale service to our clients. We are willing to set up long-term, mutual benefit relationship with people all over the world.

## Key Features



Improved module reliability and conversion efficiency



High power output and conversion efficiency



Designed for DC IEC 1000V application



Self-cleaning reduce power loss from dirt and dust



Outstanding performance in low-light irradiance environments



Certified to withstand high wind loads(2400Pa) and snow loads(5400Pa)



Certified by TÜV NORD

## Reliable Quality


- Positive power tolerance: 0~+5W
- Modules binned by current to improve system performance
- Improved material to allow modules to operate reliably in multiple mounting configuration

## Comprehensive Certificates


- IEC 61215, IEC 61730 and CE
- ISO 9001:2008: Quality management systems
- ISO 14001:2004: Environmental management systems

## LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

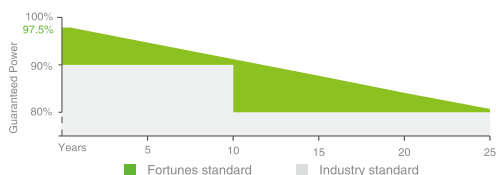

Green life is beautiful

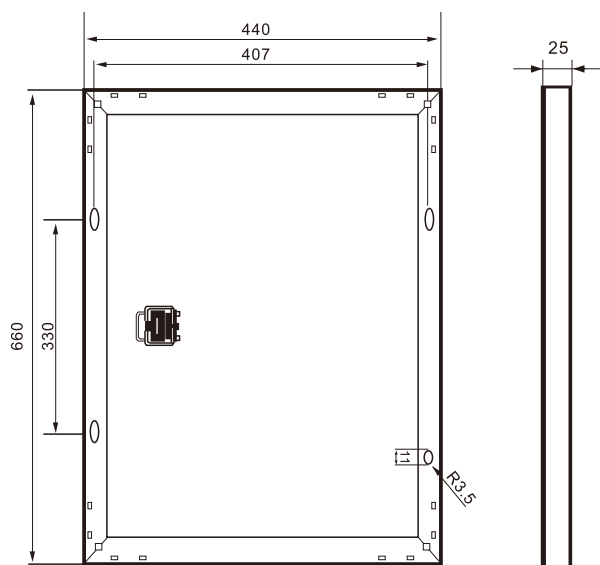

## Temperature Coefficients

NOCT	45 $\pm$ 2 $^{\circ}$ C
Voltage temperature coefficient(Voc)	-0.36%/ $^{\circ}$ C
Current temperature coefficient(Isc)	+0.033%/ $^{\circ}$ C
Power temperature coefficient(Pmpp)	-0.44%/ $^{\circ}$ C
Minimum power tolerance	$\pm$ 10%

NOCT:Nominal Operating cell Temperature

## Mechanical Data

Solar Cell	36(4 $\times$ 9) Mono-crystalline 156 $\times$ 42mm
Front Glass	3.2mm high transmission tempered glass
Frame	Anodized aluminium
Backsheet	White / Black
J-Box	IP65

## Electrical Data

Module type	<b>FDS040-12P</b>
Nominal peak power(Wp)	40W
Nominal voltage(Vmp)	17.5V
Nominal current(Imp)	2.29A
Open-circuit voltage(Voc)	22.0V
Short-circuit current(Isc)	2.54A
Cell efficiency	18.0%
Operating temperature	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Maximum system voltage	1000V DC
Weight	3.2kg
Dimension	660 $\times$ 440 $\times$ 25mm

## Zhangjiagang Fortunes Solar Technology Co.,Ltd

Add: No.2, 2nd Circle Road (North), Zhangjiagang City, Jiangsu, China  
TEL: +86-512-58542102 58546915 58546916 013812992101 FAX: +86-512-58542707  
<http://www.fortunes-solar.com.cn> E-mail: [sales@fortunes-solar.com.cn](mailto:sales@fortunes-solar.com.cn) ZIP: 215600