



Product Features



Positive tolerance
Guaranteed tolerance +3%
Reliable power output



High module efficiency
Module efficiency up to 16.9%
Cells efficiency up to 19.0%



Strong compressive strength
Certified to withstand high wind of 2400Pa
and snow loads of 5400Pa



High manufacture standards
certified to high standards by the
most reputable labs According to
IEC:61215: IEC:61730-1/2



International Management System
Manufactured and certified according
to ISO9001, Quality management system



Fire test approved
Application class A, Safety Class II, Fire Rating C




Excellent performance under extreme condition
High salt mist and ammonia resistance



Reliable quality forever
Without potential induced
degradation(PID-free)

Leading Warranty in PV Industry

- 25 year transferrable power output warranty: 10 years / 90%, 25 years / 80%
- Linear performance warranty from SIMAX Power
- 12 year material and workmanship warranty

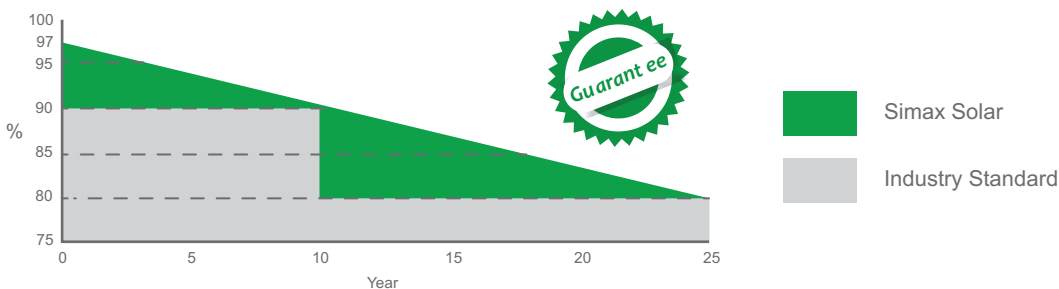

* Please refer to Simax Solar Product Warranty for details.



Electrical Characteristics

Parameters	SP660-250		SP660-255		SP660-260		SP660-265		SP660-270		SP660-275	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Peak power [Wp] P _{mpp}	250W	182W	255W	193W	260W	197W	265W	201W	270W	206W	275W	210W
Open circuit voltage [V] V _{oc}	37.8	34.4	38.0	34.8	38.5	35.0	37.8	35.1	38.0	34.7	38.3	36.2
Maximum Power Voltage [V] (V _{mpp})	30.5	27.3	30.5	27.4	31.0	27.5	30.8	27.6	31.0	27.7	31.2	27.8
Maximum Power Current [A] (I _{mpp})	8.20	6.52	8.36	7.06	8.39	7.16	8.6	7.29	8.71	7.44	8.82	7.56
Short circuit Current [A] (I _{sc})	8.85	6.97	8.94	7.4	9.11	7.54	9.24	7.54	9.33	7.6	9.37	7.64
Power Tolerance	0~+3%		0~+3%		0~+3%		0~+3%		0~+3%		0~+3%	
Module Efficiency (%)	15.5%		15.7%		16.0%		16.29%		16.60%		16.90%	

STC: Irradiance : 1000 W/m² ; Spectrum AM 1.5; Cell temperature: 25°C; Wind 0 m/s
 NOCT: Irradiance: 800W/m² ; Spectrum AM 1.5; ambient temperature 20°C,wind speed 1 m/s

Mechanical Characteristics


Solar Cell	Polycrystalline silicon 156 x 156 (mm)
No. of Cells	60 (6 x 10)
Dimensions	1640 x 992 x 35 mm (Optional 40 mm)
Weight	17.5 kg
Front Glass	3.2mm (0.13 inches) tempered glass
Frame	Anodized aluminum alloy

Output



Cable Type	Ø = 4 mm ²
Lengths	L = 900 mm
Junction Box	PV - JB003 MC4

Temperature Coefficients

Nominal Operating Cell Temperature (NOCT)	45 ± 2°C
Temperature Coefficient of (P _{max})	-0.39% / °C
Temperature Coefficient of (V _{oc})	-0.34% / °C
Temperature Coefficient of (I _{sc})	0.035% / °C

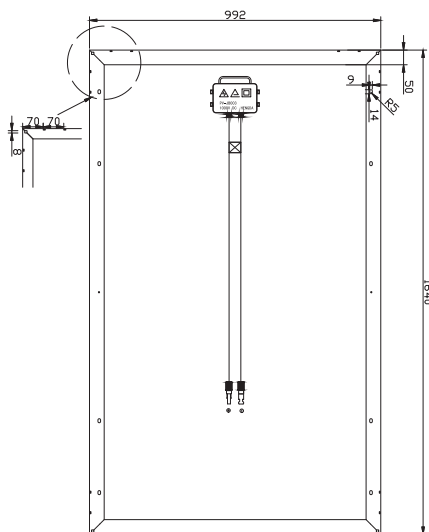

- Provide the best solutions for photovoltaic power generation and technical support
- Provide Cost-effective products
- Provide 12 Years Quality Warranty
- Power out ≥ 90% in 10 years
- Power out ≥80% in 25 years



Global standby to ensure response within 24 hours
 Australia and Europe office were established to give better services to customers

Simax Green New Energy (Europe) GmbH
 Mergenthaler Allee 23 / 25
 65760 Eschborn / Germany
 Tel.: +49 6196 9739 525
 Fax: +49 6196 5929 684
 info@simaxsolar.de
 www.simaxsolar.de



Simax (Australia) Green New Energy Pty Ltd
 5 / 78 Frankston Gardens Drive,
 Carrum Downs, VIC 3210
 Tel: +61 3 9708 2400
 Fax: +61 3 9708 2482
 info@simaxsolar.com.au
 www.simaxsolar.com.au

