

AX M-54^{3.2} premium

AXSUN Solar
„German Modules with Character“

*Photovoltaic modules from German manufacturer -
developed and manufactured with German quality demand*

reliable . powerful . attractive
passionate . honest . empathic

- ▶ High mechanical resistance
- ▶ Optimal use of the sun by high-efficiency monocrystalline cells
- ▶ Plus sorting for extra yield
- ▶ PID free
- ▶ 100% EL tested
- ▶ 100% Made in Germany



premium

- ▶ 15 years product guarantee
- ▶ 25 year performance guarantee
- ▶ very good performance tolerance 0/+5Wp
- ▶ compatible with all common inverters

- ▶ constant production control
- ▶ Processing of high quality components according to German quality standards
- ▶ further option of integrated Solaredge Power Optimizer maximizing the kWh output up to 25%



www.axsun.de

AX M-54 3.2 premium

www.axsun.de

Basic data

Dimensions (LxWxH)	1495 x 995 x 40 mm
Weight	16.1kg
Cells	54 monocrystalline solar cells (156x156mm)
Glass	3.2 mm hardened safety glass, optional with anti-reflection coating
Frame	Anodised aluminium section with hollow chamber and drainage holes, black or silver anodised
Bypass diodes	3 pieces
Connection socket	Connecting socket plastic, IP65 type of protection, optional with embedded Solaredge power optimizer
Cable, plug	4mm ² solar cable, 1000 mm long, high-quality plug system, KSK4 (MC4)
Max. Voltage	1000 V
Max. return current	15 A
Temperature range	-40°C to 85°C
Max. pressure load (with third mounting rail, please follow installation instructions)	7200 Pascal
Max. pressure load	5400 Pascal
Max. dynamic load	2400 Pascal
Application class (acc. to IEC 61730)	A
Fire class (acc. to IEC 61730)	C
Protection class	II
Laminate	Dimensions 1488 x 988 x 5 mm, Weight 13.6 kg

Electrical data

under standard test conditions *

		AX M-54 255	AX M-54 260	AX M-54 265
Rated power	P_{MPP} [Wattpeak]	255 Wp	260 Wp	265 Wp
Rated voltage	U_{MPP} [Volt]	28.68 V	28.89 V	29.12 V
Rated current	I_{MPP} [Ampere]	8.89 A	9.00 A	9.10 A
No-load voltage	U_{OC} [Volt]	35.28 V	35.53 V	35.82 V
Short-circuit current	I_{SC} [Ampere]	9.50 A	9.62 A	9.73 A
Efficiency	η	17.14 %	17.48 %	17.81 %


Electrical behaviour

under NOCT**

Rated power NOCT	P_{NOCT} [Wattpeak]	185 Wp	189 Wp	192 Wp
Rated voltage	U_{MPP} [Volt]	25.66 V	25.85 V	26.06 V
Rated current	I_{MPP} [Ampere]	7.19 A	7.28 A	7.36 A
No-load voltage	U_{OC} [Volt]	32.07 V	32.30 V	32.56 V
Short-circuit current	I_{SC} [Ampere]	7.69 A	7.79 A	7.87 A

Temperature coefficient (in case of temperature change)

Power	P_{MPP} [Wattpeak]	$Tk P_{MPP} = -0.42 \% / K$
Voltage	U_{OC} [Volt]	$Tk U_{OC} = -0.32 \% / K$
Current	I_{SC} [Ampere]	$Tk I_{SC} = 0.043 \% / K$

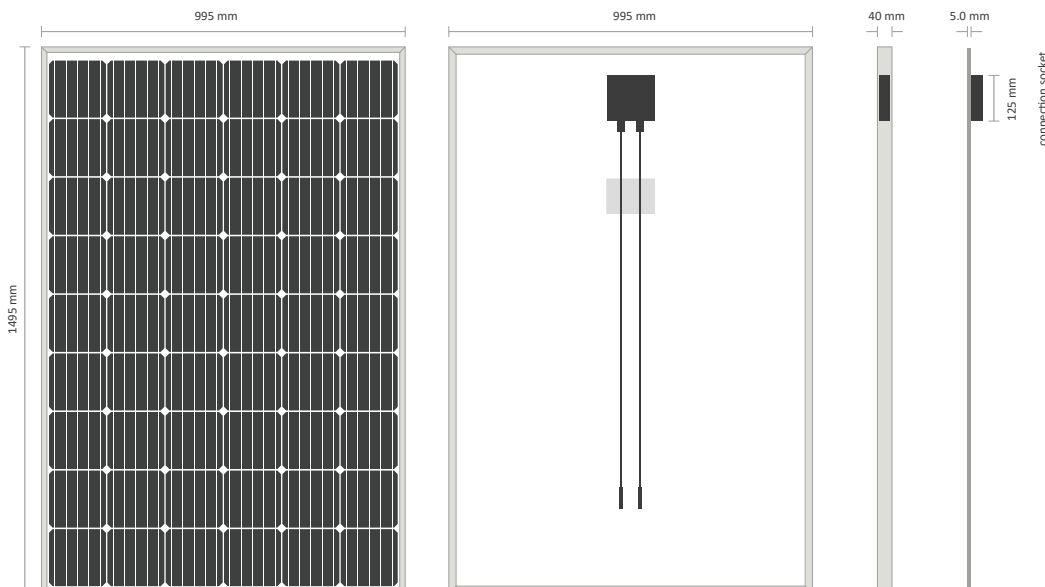

take way
for an easy way



Sales partner AxSun Solar

100%
MADE IN
GERMANY