

**60 CELL MODULE**

**POLY-CRYSTALLINE**

**HST60FXXXP**

**ELECTRICAL CHARACTERISTICS**

Rated power	Pm	W	<b>265</b>	<b>270</b>	<b>275</b>
Open circuit voltage	Voc	V	38.25	38.31	38.40
Maximum power voltage	Vmp	V	30.79	30.90	31.16
Short circuit current	Isc	A	9.14	9.25	9.32
Maximum power current	Imp	A	8.62	8.75	8.83
Module efficiency	η	%	16.27-16.56	16.57-16.87	16.88-17.18
Power tolerance		W		-0 / +4.99	

**CONSTRUCTION**

Cell / Matrix	60; Poly Crystalline; 10 x 6
Dimension	1650 x 987 x 40 mm
Weight	17.5 kg
Glass	ARC; Low Iron; Tempered; High Light Transmission; 3.2mm
Junction Box	IP68; Potted
Cable	4mm <sup>2</sup> ; 1000±50mm length
Connector	TL - CABLE01S
Diode	Schottky Bypass Diodes; 3 Nos
Frame	18μ Anodized aluminium alloy; twin wall profile
Locking	Corner key type

**MAXIMUM RATINGS**



System Voltage	1500 VDC (IEC) / 1000 VDC (BIS)
Fuse Rating	15 A
Application Class	Class A Protection Class II
Snow Load	5400 Pa
Wind Load	2400 Pa

**TEMPERATURE RATINGS**

NOCT	44°C (±2°C)
Tc of Voc	-0.27 %/°C
Tc of Isc	+0.04 %/°C
Tc of Pm	-0.35 %/°C
Operating range	-40°C to +85°C


**SALIENT FEATURES**

- BIS Certified (IS 14286 & IS/IEC 61730-1 & 2)
- Salt Mist Resistance; Certified for Severity 6 1500VDC (IEC) / 1000VDC (IEC,BIS)
- PID resistant (3 times of IEC Criteria)
- Micro-crack free
- Multi stage 100% in-line EL passed
- Higher energy yield on field performance
- More than 25 in-house quality checks
- Positive tolerance up to +5W
- Fire Class-“C”
- Best in class material for true 25 years life
- Extended power warranty
- IEC 61215, 61730, 61701, 62804

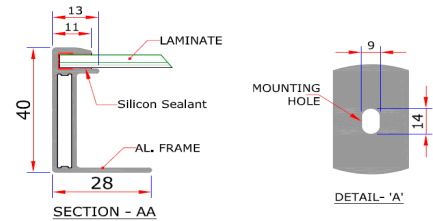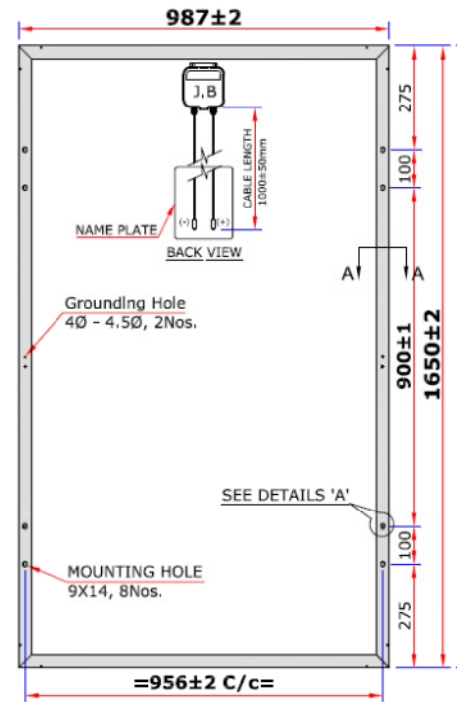


**WARRANTY**

Product	10 Years
Performance	90% of rated power for 12 Yr 81% of rated power for 25 Yr

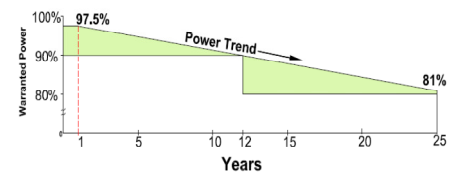

I-V Curve of 275W at 25°C cell temp. and different Irradiance level

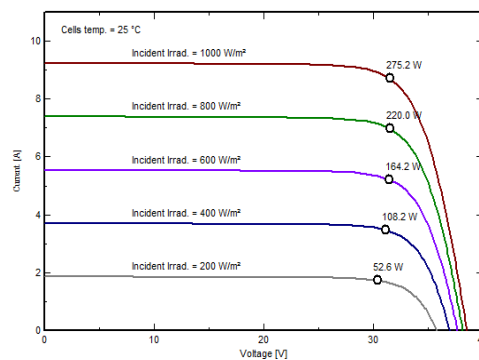

Note: Design and Specifications are subject to change without notice. • Electrical Parameters measured at STC only (at 25°C, 1000W/M<sup>2</sup>). • Please refer to installation manual and strictly adhere to instruction / guidelines to qualify for warrant

