



Polycrystalline 325W (72pcs)

SPECIFICATIONS

Dimensions	1956 × 992 × 40 mm		
Weight	23 kg		
Frame	Aluminium hollow-chamber frame on each side		
Glass	Low-iron and tempered Glass 3.2 mm		
Cells	72 pcs Poly-crystalline Si-cells (156 × 156 mm)		
Cell	EVA		
Embedding	CE IEC TÜV		
Back-Foil	FEVE / PET / FEVE		
Junction Box			
Cable	4mm ² solar cable 2×900 mm		
Temperature	-40°C...+85°C		
Range			
Load Capacity	5400 Pa		
Application class	Class A		
Electrical protection class	Class II		
Fire safety class	Class C		
Product			
Warranty	25 years		
Power	10 years 90%		
Guarantee	25 years 80%		

CHARACTERISTICS


Max.System Voltage	1000V/DC
Temperature-Coefficient I _{sc}	+0.02973%° K
Temperature-Coefficient V _{oc}	-0.38038%° K
Temperature-Coefficient P _{mpp}	-0.57402%° K
NOCT***	45°C

CERTIFICATES


IEC 61215
IEC 61730
CE IEC TÜV

INSURANCE


Chubb

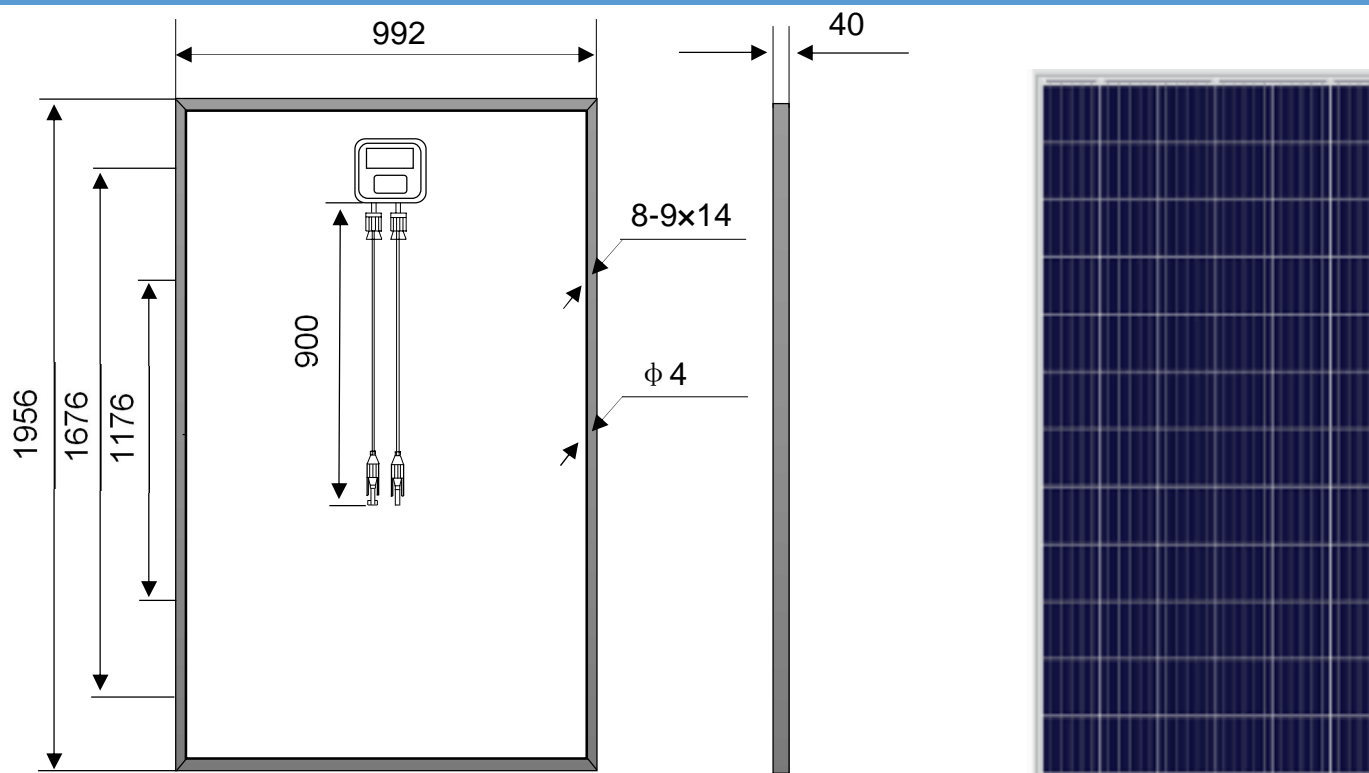

CURRENT-VOLTAGE CURVES

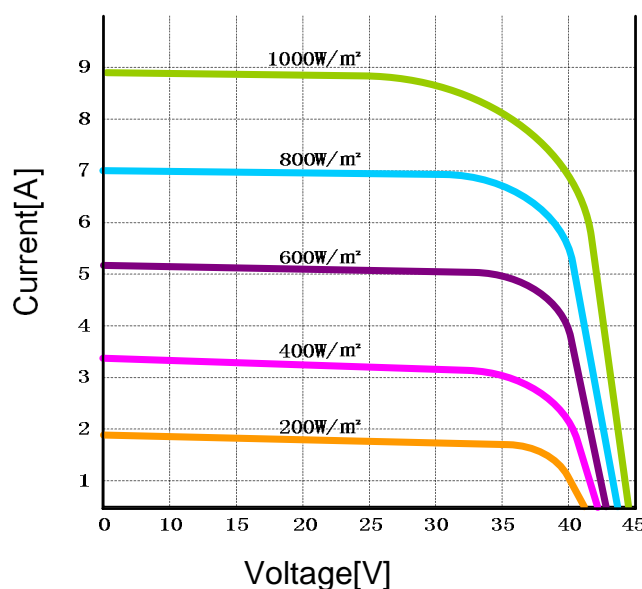

Module characteristics at constant module temperatures (25°C) and different levels of irradiance.

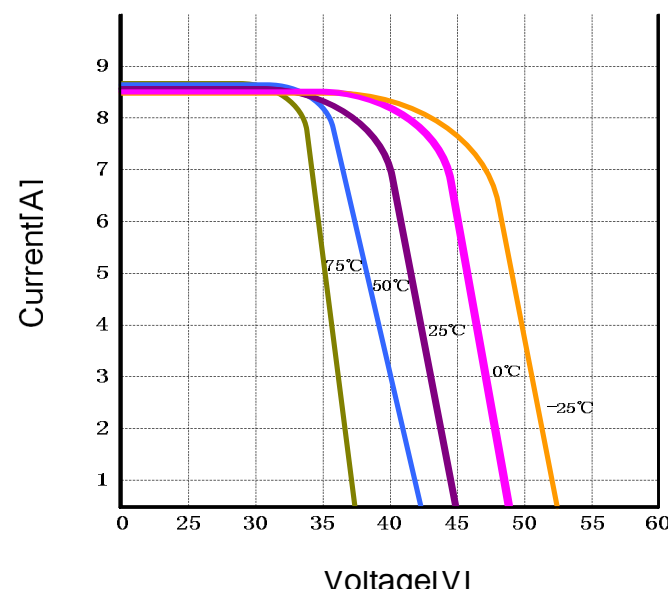

Module characteristics at different module temperatures and constant Module irradiance(1.000W/m²).

ESPSC TYPE	STC	NOCT
Power Class	325W	239W
Max.Power Voltage(V _{mpp})	37.45	34.41
Max.power Current(I _{mpp})	8.68	6.95
Open Circuit Voltage(V _{oc})	46.15	42.77
Short Circuit Current(I _{sc})	9.39	7.52
Module Efficiency	17.25%	

- * Mpp: Maximum Power Point
- ** STC (Standard Test Conditions): 1000W/m², 25°C, AM 1.5
- *** Normal Operating Cell Temperature
- **** Grade A Cell
- ***** Warranty: 25 years ; Power 10 year 90% ; Guarantee 20 years 80%

