


VSUN

Innovative & Smart

VSUN330-120MH The Half Cell Module

VSUN330-120MH
VSUN320-120MH

VSUN325-120MH
VSUN315-120MH

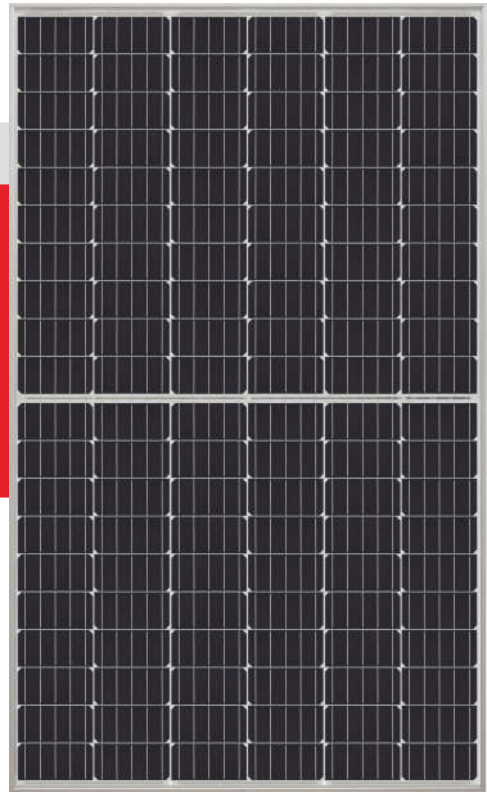

19.84%

Module efficiency

12years

Material & Workmanship warranty

330W

Highest power output

25years

Linear power output warranty



PERC Cell Technology



Higher output power



Lower risk of micro-crack



Positive tolerance offer



Lower risk of hot spot



Better shading tolerance




Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa



Lower LCOE

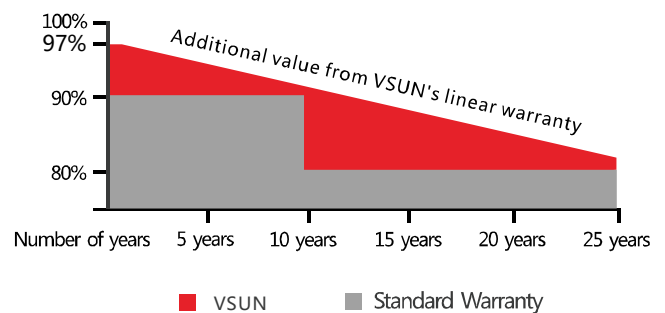

Munich RE 

-12-year product warranty

-25-year linear power output warranty

Invested by Fuji Solar, VSUN is a Japanese solar module solutions provider located in Tokyo that offers Japanese quality solar technologies globally. The group's business started in Japan in 2006, later spreading to North America, Southeast Asia, and EMEA.

Innovative & Smart – VSUN has been committed to providing greener, cleaner, and more intelligent renewable energy solutions. It is focusing on the new energy market and the development of customized and high-efficiency products.

Note:

All information and data are subject to change without notice.
All rights reserved@VSUN

A Sub-company of **FUJISOLAR**



Engineered in Japan
vsun@vietnamsunenergy.com
www.vsun-solar.com

Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN330-120MH	VSUN325-120MH	VSUN320-120MH	VSUN315-120MH
Maximum Power - Pmax (W)	330	325	320	315
Open Circuit Voltage - Voc (V)	40.6	40.4	40.2	39.9
Short Circuit Current - Isc (A)	10.35	10.28	10.17	10.08
Maximum Power Voltage - Vmpp (V)	33.7	33.5	33.3	33.1
Maximum Power Current - Imp (A)	9.8	9.71	9.61	9.52
Module Efficiency	19.84%	19.54%	19.24%	18.94%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Tolerance of Pmp: 0~+3%.
Measuring uncertainty of power: ±3%.

Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	VSUN330-120MH	VSUN325-120MH	VSUN320-120MH	VSUN315-120MH
Maximum Power - Pmax (W)	243.7	240.2	236.3	234.7
Open Circuit Voltage - Voc (V)	37.5	37.4	37.2	36.9
Short Circuit Current - Isc (A)	8.36	8.3	8.22	8.15
Maximum Power Voltage - Vmpp (V)	31	30.8	30.6	30.6
Maximum Power Current - Imp (A)	7.86	7.8	7.72	7.67

Normal Operating Cell Temperature(NOCT) : irradiance 800W/m²; wind speed 1 m/s ; cell temperature 45°C; ambient temperature 20°C.
Measuring uncertainty of power: ±3%.

Temperature Characteristics

NOCT	45°C (± 2°C)	Maximum System Voltage [V]	1500
Voltage Temperature Coefficient	-0.29%/°C	Series Fuse Rating [A]	20
Current Temperature Coefficient	+0.05%/°C		
Power Temperature Coefficient	-0.39%/°C		

Maximum Ratings

Material Characteristics

Dimensions	1680×990×35mm (L×W×H)
Weight	18.7kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	12×10 pieces monocrystalline solar cells series strings (156.75mm×78.375mm)
Junction Box	Rated current≥13A, IP≥67, TUV&UL
Cable&Connector	Length 400 mm, 1×4 mm ² , compatible with MC4


Packaging

Dimensions(L×W×H)	1720×1110×1120mm	Temperature Range	-40 °C to + 85 °C
Container20'	360	Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m-s-1
Container40'	780	Maximum Surface Load	5,400 Pa
Container40'HC	845	Application class	class A

System Design

Dimensions

Note: mm (inch)

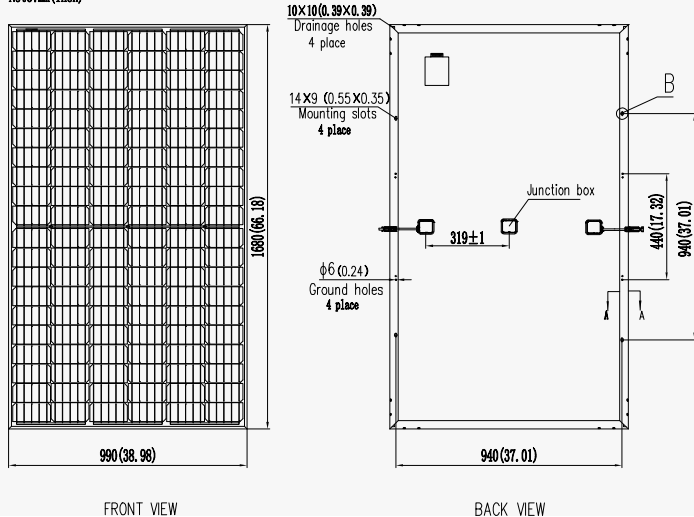

IV-Curves

