



UNFG180-12 (12V180Ah/10hr)



UNG Series is GEL battery which is manufactured with AGM separator and colloidal Silicon. Gel battery are featured with low self-discharge, strong ability to recover from deep discharging, excellent cycle life and performance at cold ambient temperatures than conventional VRLA

Battery Construction



Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Colloidal silicon

General Feature


- Micro millimeter SiO₂ and H₂SO₄ technology for Efficient gas recombination of up to 99% and Freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

SPECIFICATION

Nominal voltage 12V
 Number of cell 6
 Length(mm/inch) 546/21.5
 Width(mm/inch) 125/4.92
 Height(mm/inch) 317/12.5
 Total Height(mm/inch) 325/12.8
 Approx. Weight(kg/lbs) 58/127.8

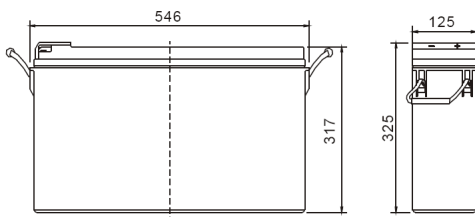

Terminal (F12)



Performance Characteristics

Capacity 77°F(25°C)	100 hour rate (2.1A、 11.1V)	210Ah
	20 hour rate (9.5A、 10.8V)	190Ah
	10 hour rate (18.0A、 10.8V)	180Ah
	1 hour rate (118A、 9.6V)	118Ah
Internal Resistance	Full charged Battery 77°F(25°C): 4.5mΩ	
Operating Temperature Range	Discharge: -20~60°C	
	Charge: -10~60°C	
	Storage: -20~60°C	
Self-Discharge 3% of capacity declined per month at 20°C(average)		
Max. discharge current 77°F(25°C): 1000A(5S)		
Charge (Constant Voltage)	Float: 13.38~13.68 V/77° F(25°C)	
	Cycle: 14.28~14.52 V/77°F(25°C) Max. Current: 45A	









Discharge Constant Current (Amperes at 77° F 25 °C)

End Point Volts/Cell	10min	15min	30min	45min	1h	3h	5h	10h	20h
1.60V	395	310	195	143	118	49.5	32.7	18.3	9.70
1.65V	375	295	190	140	116	49.0	32.5	18.3	9.70
1.70V	355	280	185	137	113	48.5	32.3	18.2	9.65
1.75V	335	264	170	134	110	47.5	32.0	18.1	9.60
1.80V	310	246	164	130	107	46.0	31.7	18.0	9.50

Discharge Constant Power (watts at 77° F 25 °C)

End Point Volts/Cell	10min	15min	30min	45min	1h	2h	3h	4h	5h
1.60V	675	530	355	280	222	134	96.0	76.0	65.0
1.65V	645	508	345	274	218	132	95.0	75.3	64.5
1.70V	615	485	335	268	214	130	94.0	74.6	64.0
1.75V	585	463	324	262	209	128	93.0	73.9	63.5
1.80V	550	440	312	254	205	125	92.0	73.0	62.8

(Note) The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum values.

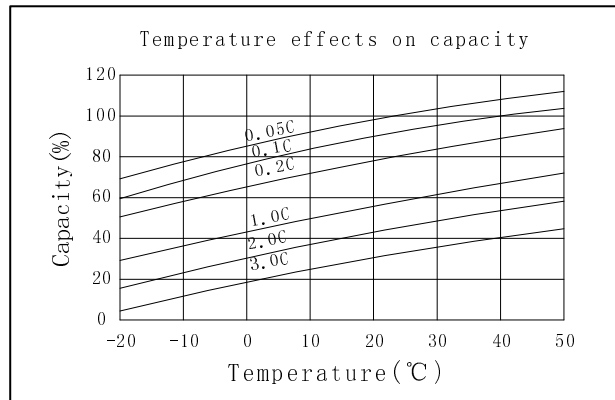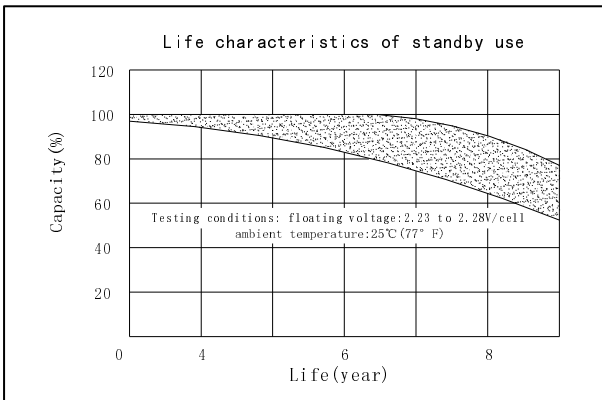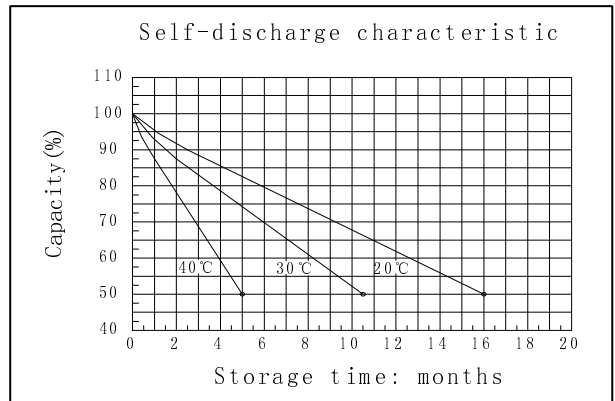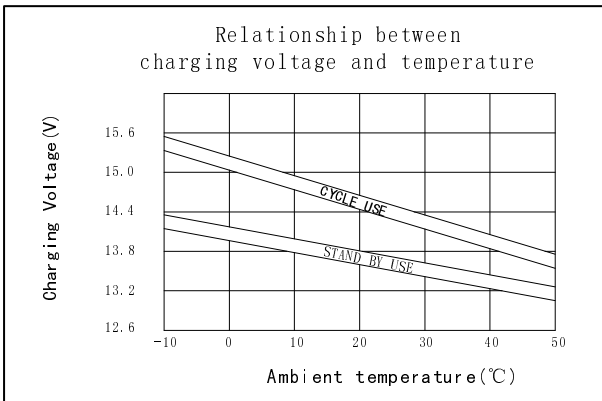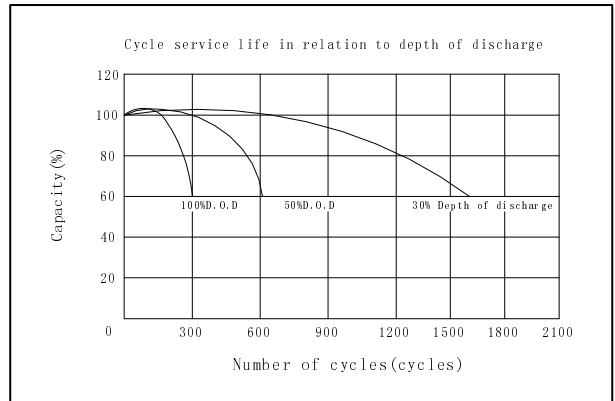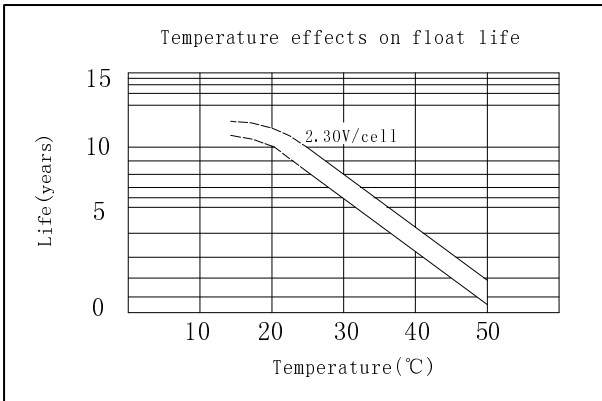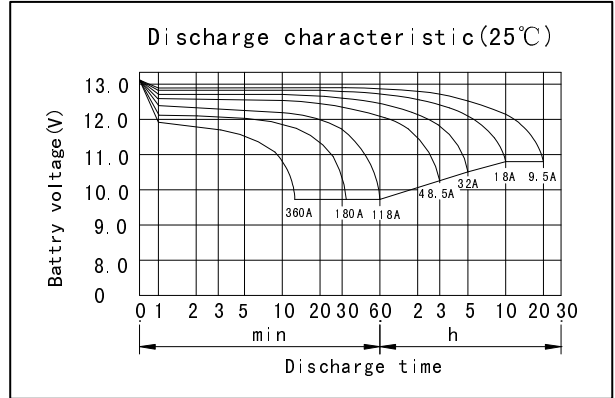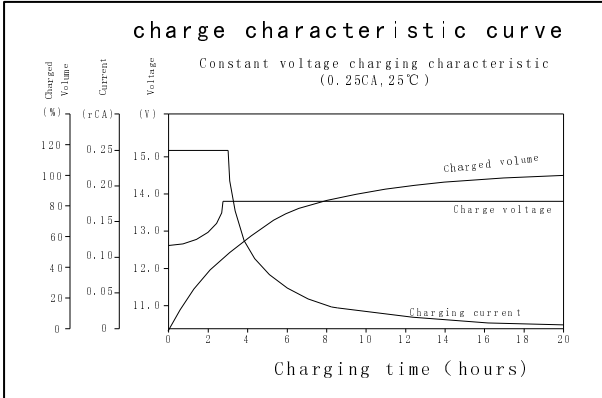

DONGGUAN OREMA POWER CO., LTD

Add: #1 Qilinling Road Shahu, Tangxia Town, Dongguan Guangdong China

TEL: +86-769- 3896 1163 +86-769- 3896 1168

FAX: +86-769- 3896 1169



www.oremabattery.com