

GENERAL FEATURES

- Able to operate at 60°C
- Integrated design to ensure the best uniformity and reliability
- Longer Service Life and high stability under high temp. (no air-con needed)
- Use special additives:
Deep discharge recovery capability


APPLICATIONS

- BTS Stations
- Solar & Wind energy system
- UPS system
- Telecom systems
- Power Plants
- Cable TV Systems



DIMENSIONS & WEIGHT

Length(mm)	491±1
Width(mm)	351±1
Height(mm)	343±1
Total Height(mm)	383±1
Weight(kg)	130.8±3%

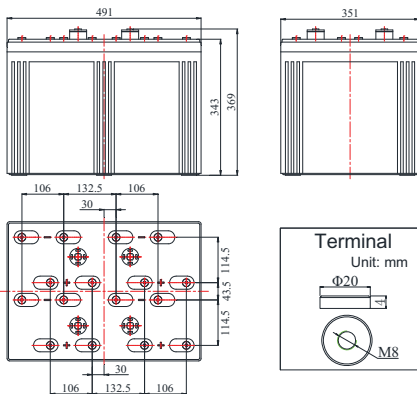

COMPLIED STANDARDS

IEC 60896-21/22	JIS C8704
YD/T1360	BS6290 part4
GB/T 19638	UL 1989

TECHNICAL SPECIFICATIONS



Nominal Voltage		2V(1 cells per unit)
Design Floating Life @25°C		18 Years
Nominal Capacity @25°C (10 hour rate@200.0A,1.8V)		2000Ah
Capacity @25°C	20 hour rate (106.00A,1.8V)	2120Ah
	5 hour rate (352.0A,1.75V)	1760Ah
	1 hour rate (1282.0A,1.6V)	1282Ah
Internal Resistance	Full Charged Battery@25°C	≤0.20mΩ
Ambient Temperature	Discharge	-30°C~60°C
	Charge	-30°C~60°C
	Storage	-30°C~60°C
Max.Discharge Current@25°C		8000A(5s)
Capacity affected by Temperature (10 hr Capacity)	40°C	108%
	25°C	100%
	0°C	90%
	-15°C	70%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 300A Voltage 2.23-2.27V
	Cycle Use	Initial Charging Current Less than 300A Voltage 2.33-2.37V

BATTERY DISCHARGE TABEL

Discharge Constant Current per Cell (Amperes at 25°C)







F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	2126.0	1610.0	1282.0	750.0	572.0	444.0	372.0	324.0	260.0	210.0	111.00
1.65V	2014.0	1548.0	1240.0	726.0	554.0	434.0	366.0	318.0	258.0	206.0	110.00
1.70V	1956.0	1492.0	1206.0	706.0	540.0	424.0	358.0	312.0	254.0	204.0	108.80
1.75V	1870.0	1426.0	1162.0	688.0	528.0	414.0	352.0	306.0	252.0	202.0	107.80
1.80V	1802.0	1374.0	1122.0	662.0	512.0	404.0	344.0	300.0	244.0	200.0	106.00

Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	4102.0	3058.0	2468.0	1422.0	1094.0	852.0	718.0	626.0	512.0	410.0	218.0
1.65V	3918.0	2954.0	2402.0	1384.0	1066.0	836.0	706.0	616.0	508.0	406.0	214.0
1.70V	3752.0	2860.0	2320.0	1352.0	1042.0	820.0	696.0	608.0	500.0	402.0	212.0
1.75V	3566.0	2746.0	2236.0	1320.0	1022.0	802.0	686.0	598.0	488.0	398.0	210.0
1.80V	3416.0	2654.0	2164.0	1276.0	994.0	784.0	672.0	588.0	478.0	396.0	208.0

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CBB** for the latest information.

PERFORMANCE CHARACTERISTICS

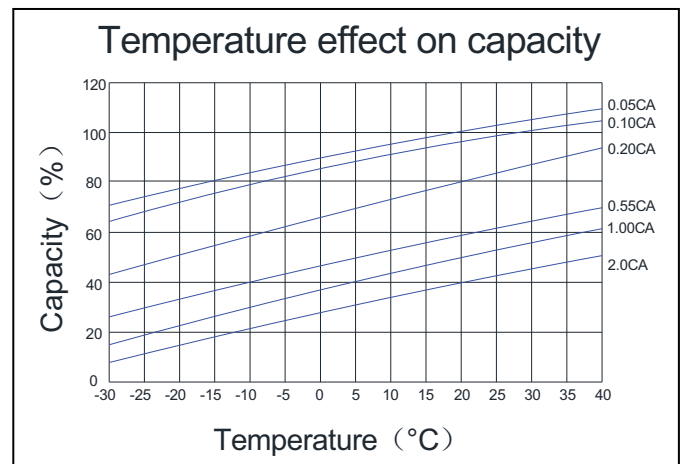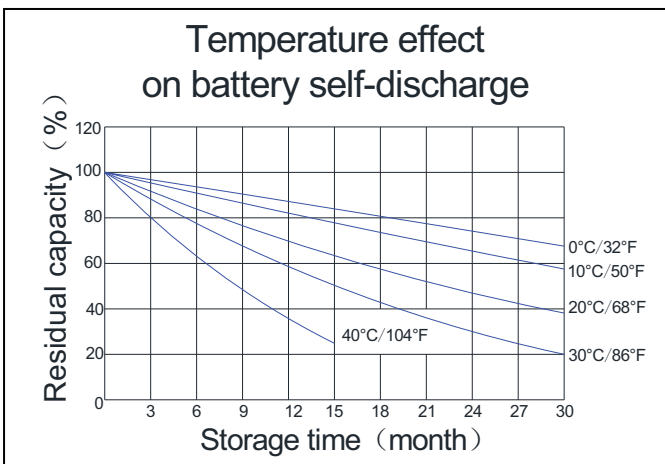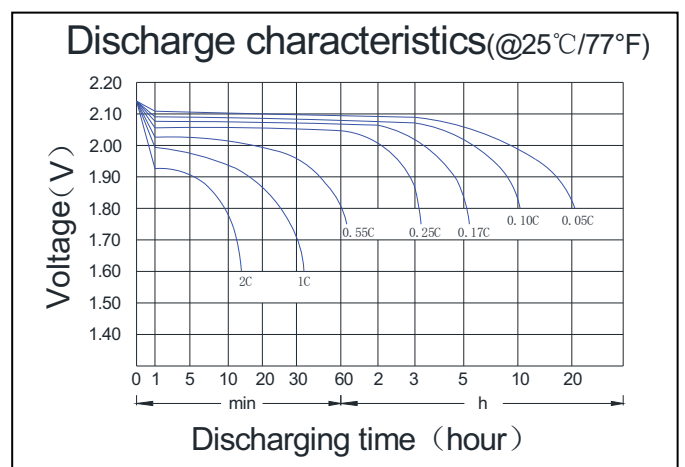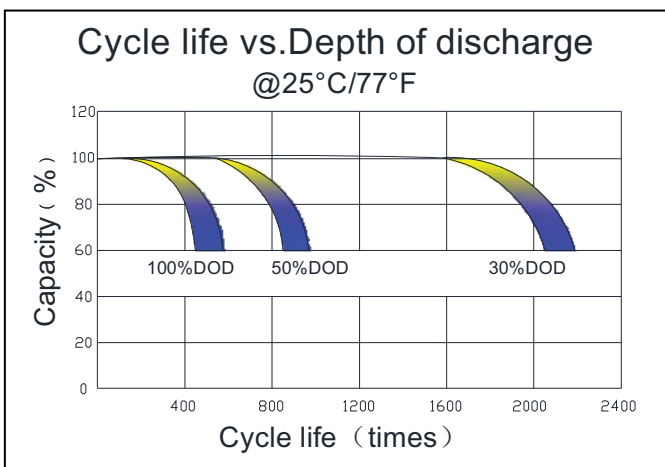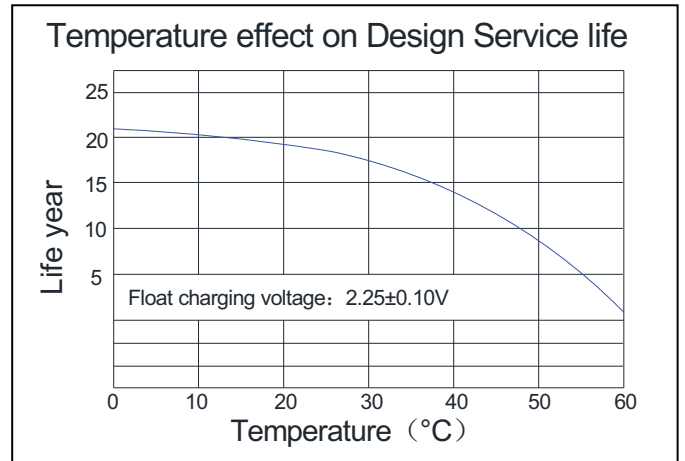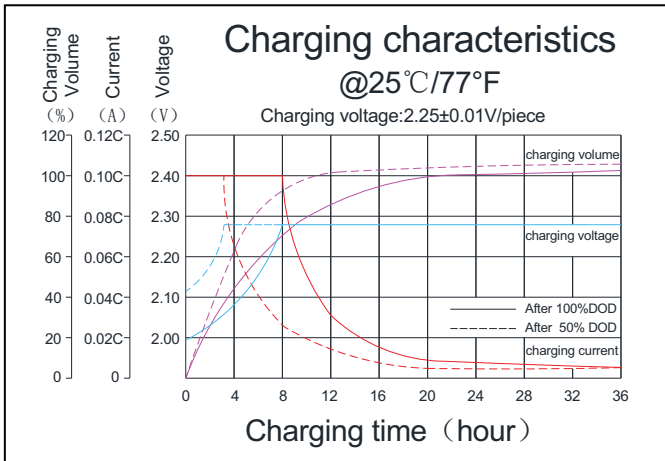

BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	ABS (UL94-V0 optional)	Flame Si-Rubber and aging resister	Female Copper Insert M8 (torque: 10~12N.m)	Advanced AGM separator for high pressure cell design	Dilute high purity sulphuric acid with fumed Silica gel	Two layers epoxy resin seal

CBB Battery Technology Co., Ltd.

RM504, 55 Hanxing Zhong Road, Zhongcun, Panyu, Guangzhou 511495 China
 Tel: +86-020-84888946 Fax: +86-020-62824569

Koyama®

www.cbb-battery.com