


SERIES
MSEA

400-420 WATT

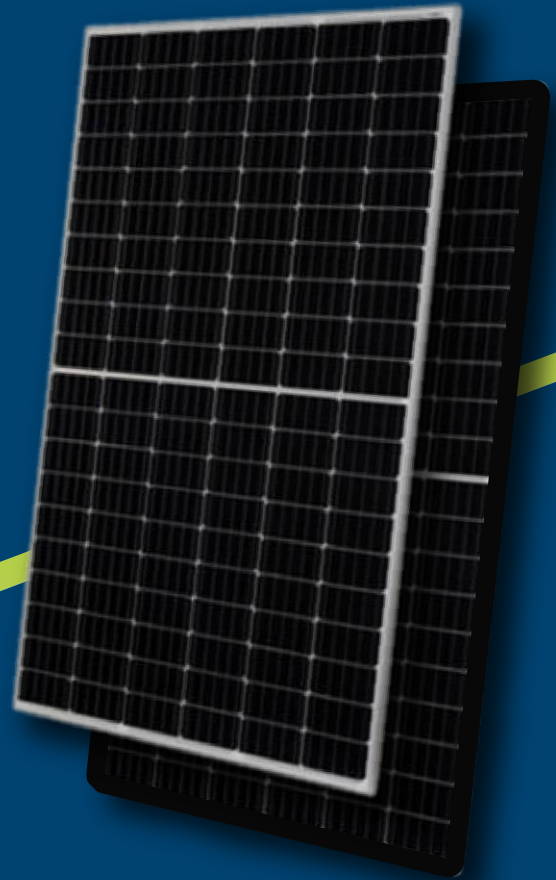

True Source
of **Energy**

AUSTRALIAN MADE

Fully Automated & Largest Manufacturing Facility in Australia



Crystalline Silicon
PV Modules
Type Testing

- ▶ IEC 61215-1: 2016
- ▶ IEC 61215-1-1: 2016
- ▶ IEC 61215-2: 2016
- ▶ IEC 61730-1: 2016
- ▶ IEC 61730-2: 2016
- ▶ EN 61215-1: 2016
- ▶ EN 61215-1-1: 2016
- ▶ EN 61215-2: 2017
- ▶ EN IEC 61730-1: 2018
- ▶ EN IEC 61730-2: 2018
- ▶ Periodically Factory Inspection as per CIG 021-024



Our Approach We believe high quality solar power should be produced locally at globally competitive pricing.

Meticulous manufacturing, testing and quality assurance standards, DEKRA certified according to IEC standards and developed QMS system ensures consistent quality and traceability.


Our Quality

- 2400 pa wind & 5400 pa mechanical loads
- High temperature operation
- Easy module replacement
- Quality control and traceability by stringent QMS system
- State of ART fully automatic facility
- Earth leakage tested to 3600V DC
- Double Electro-Luminescence (EL) tested
- Built to perform in low light condition
- Module pass fire class C performance per UL790



Module Design

- Cells Type** Mono 158.75×79.375mm
- Weight** 23kg
- Dimension** 2000×1002×40mm
- Output Cables** 4.0mm²; Portrait: N 400mm/P 300mm, Landscape: N 1400mm/P 1400mm
- No. of Cells** 144 (6×24)
- Glass** 3.2 mm High Transmission, Antireflection Coating
- Junction box** IP68, 3 Bypass Diodes
- Connector** QC Solar (Suzhou) Corporation(QC4.10-35)
- Packing** 31pcs/pallet, 310pcs/20GP, 726pcs/40HQ

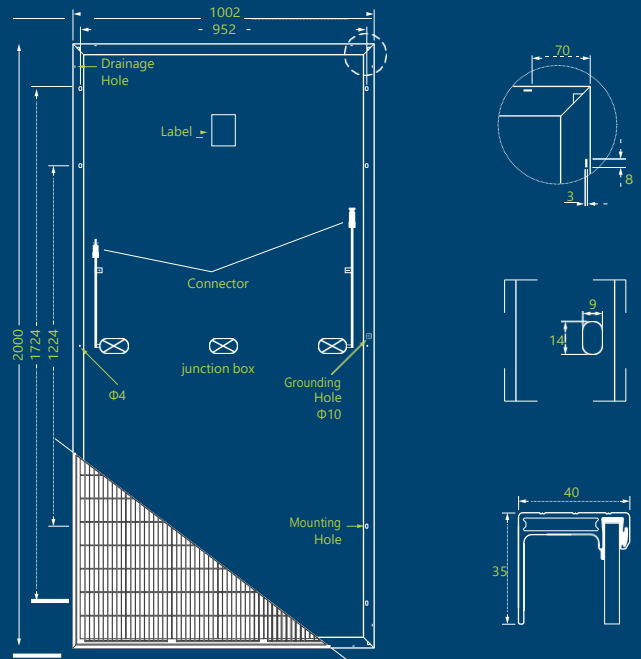

Modules	MSEA-400W-MH72		MSEA-410W-MH72		MSEA-420W-MH72	
	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	400W	299W	410W	309W	420W	318W
Open-circuit Voltage (Voc)	49.0V	47.5V	49.4V	47.7V	49.8V	47.9V
Maximum Power Voltage (Vmp)	39.7V	39.9V	41.0V	40.1V	41.3V	40.3V
Short-circuit Current (Isc)	10.32A	8.22A	10.40A	8.27A	10.47A	8.31A
Maximum Power Current (Imp)	9.2A	7.65A	10.00A	7.71A	10.08A	7.77A
Module Efficiency (%)	20.35%		20.38%		20.63%	
Operating Temperature (°C)	-40 ~ +85°C					
Maximum System Voltage	1500V DC					
Maximum Series Fuse Rating	20A					
Tolerance of rating Pmax/Isc/Voc%	±3%/±3%/±3%					

NOCT : Irradiance 800w/m², Cell temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

STC : Irradiance 1000w/m², Cell temperature 25°C, Spectrum AM1.5

Serial number having prefix: MSEA is Made in Australia

Serial number having prefix: MSEC is Made in China

TEMPERATURE RATINGS

Nominal Operating Cell Temp	45°C ±2°C
Tempcoefficient of Pmax	-0.37%/°C
Tempcoefficient of Voc	-0.29%/°C
Tempcoefficient of Isc	0.05%/°C

MAXIMUM RATINGS

Operational Temp	-40 to +85°C
Max system Voltage	1500V DC (IEC)
Max Series Fuse Rating	20A
Mechanical Load	5400pa

PERFORMANCE WARRANTY


Max power degradation 0.5%/year
 97.5% at the end of first year
 93% at the end of 10th year
 85.5% at the end of 25th year

25
YEAR

PRODUCT WARRANTY

25
YEAR

PERFORMANCE WARRANTY

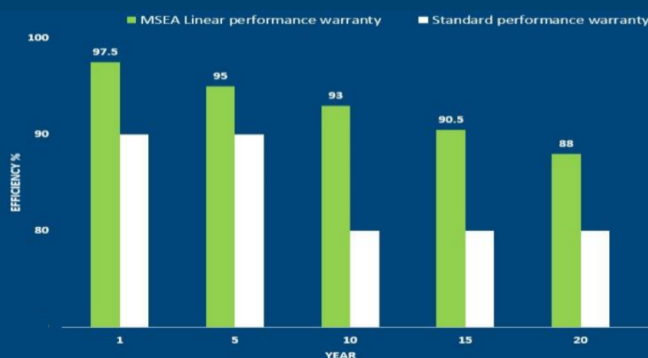

20.63%
Max Module Eff.

0~+5W
Positive Tolerance



Made In Australia

CONTACT US

MSquare Energy Pty Ltd

For any enquiries, mail us at
support@msquareenergy.com.au

 1800 336 786 | +61 286073354

 96-100 Toongabbie Rd
Girraween NSW Australia 2145

For more details, visit msquareenergy.com.au