

MonoR Series

Monocrystalline
60 - cell Module

TW-330HM

310-330W

0-3% Positive Tolerance




Monocrystalline



5BB



Grade A

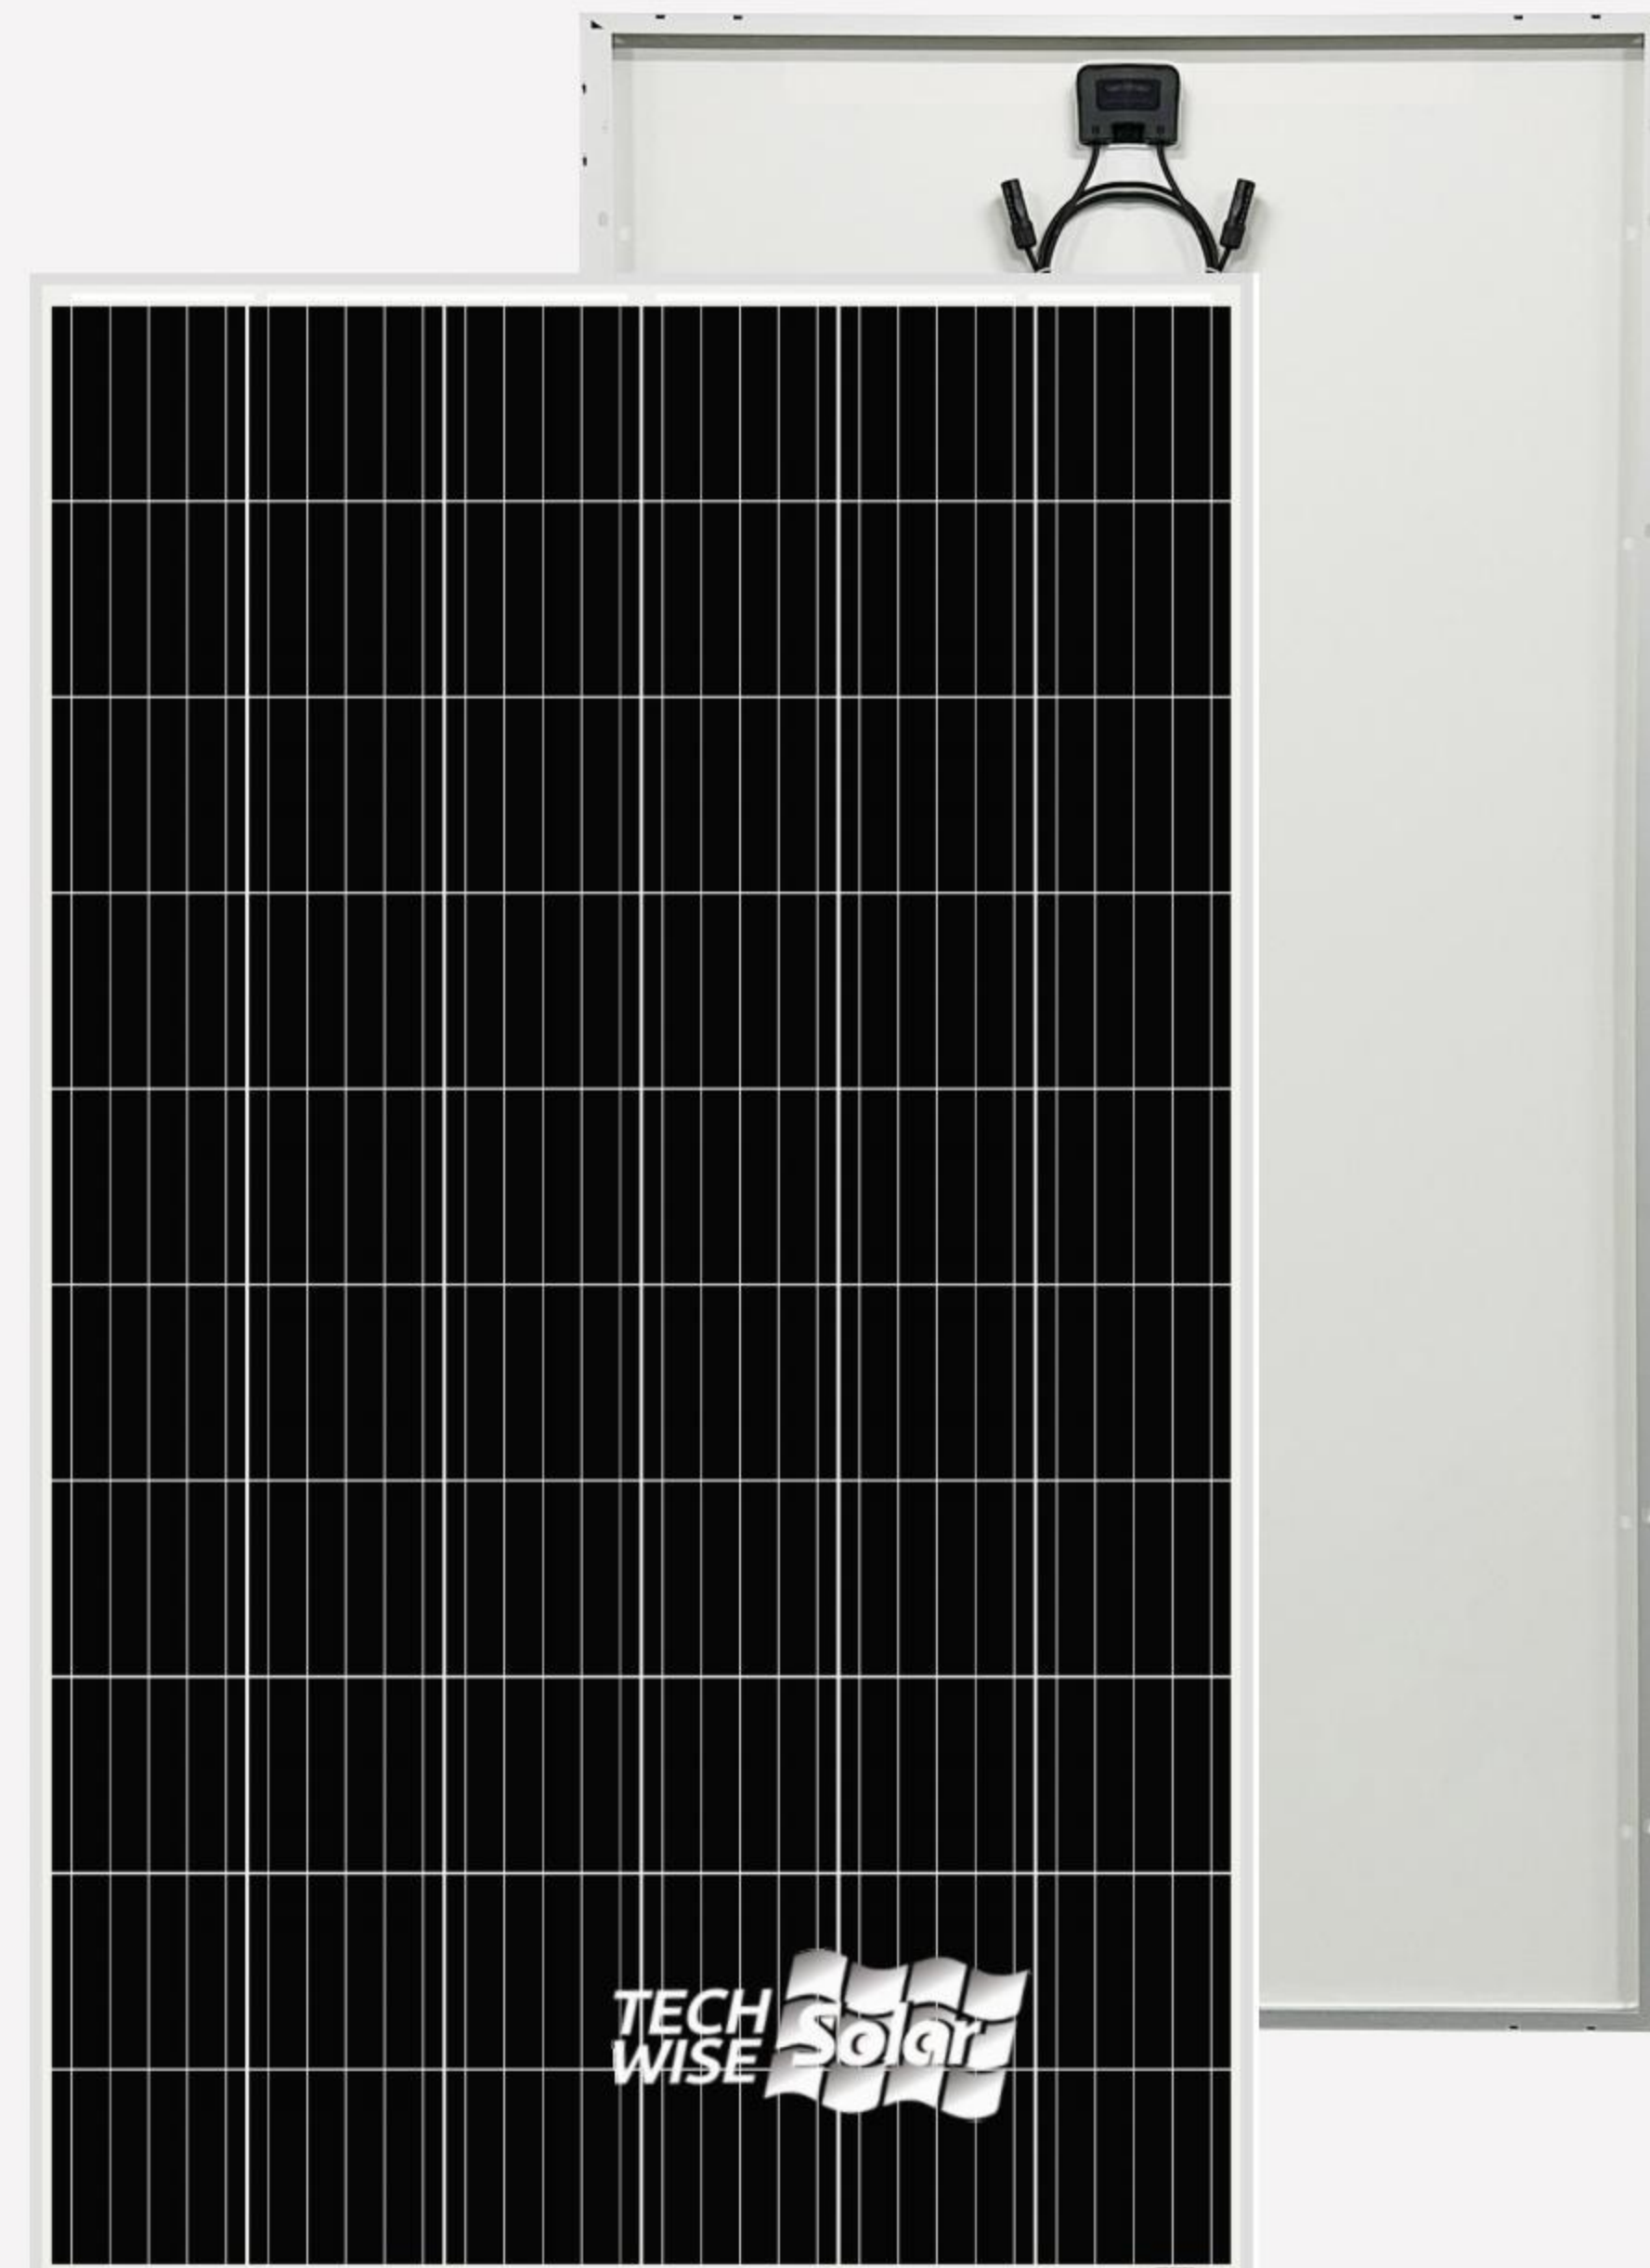

• MODULE FEATURES



High Efficiency

PERC technology improves efficiency, increases power generation, and contributes to lower LCOE.



Lower Heat Spot Risk

Innovative circuit design and "Half Cell" structure decrease the temperature of heat spots and effectively reduce power loss.



Excellent Low-light Performance

Reliable performance in low-light conditions such as in the morning, at dusk or during raining days.



Resilient to Extreme Weather

Carefully selected materials ensure the module still works well under the condition of 2400Pa wind load and 5400Pa snow load.



PID Resistant

High quality solar cell and advanced processing technology contribute to excellent PID resistance performance.


• Quality Certification



• Product Qualification



• Performance Warranty

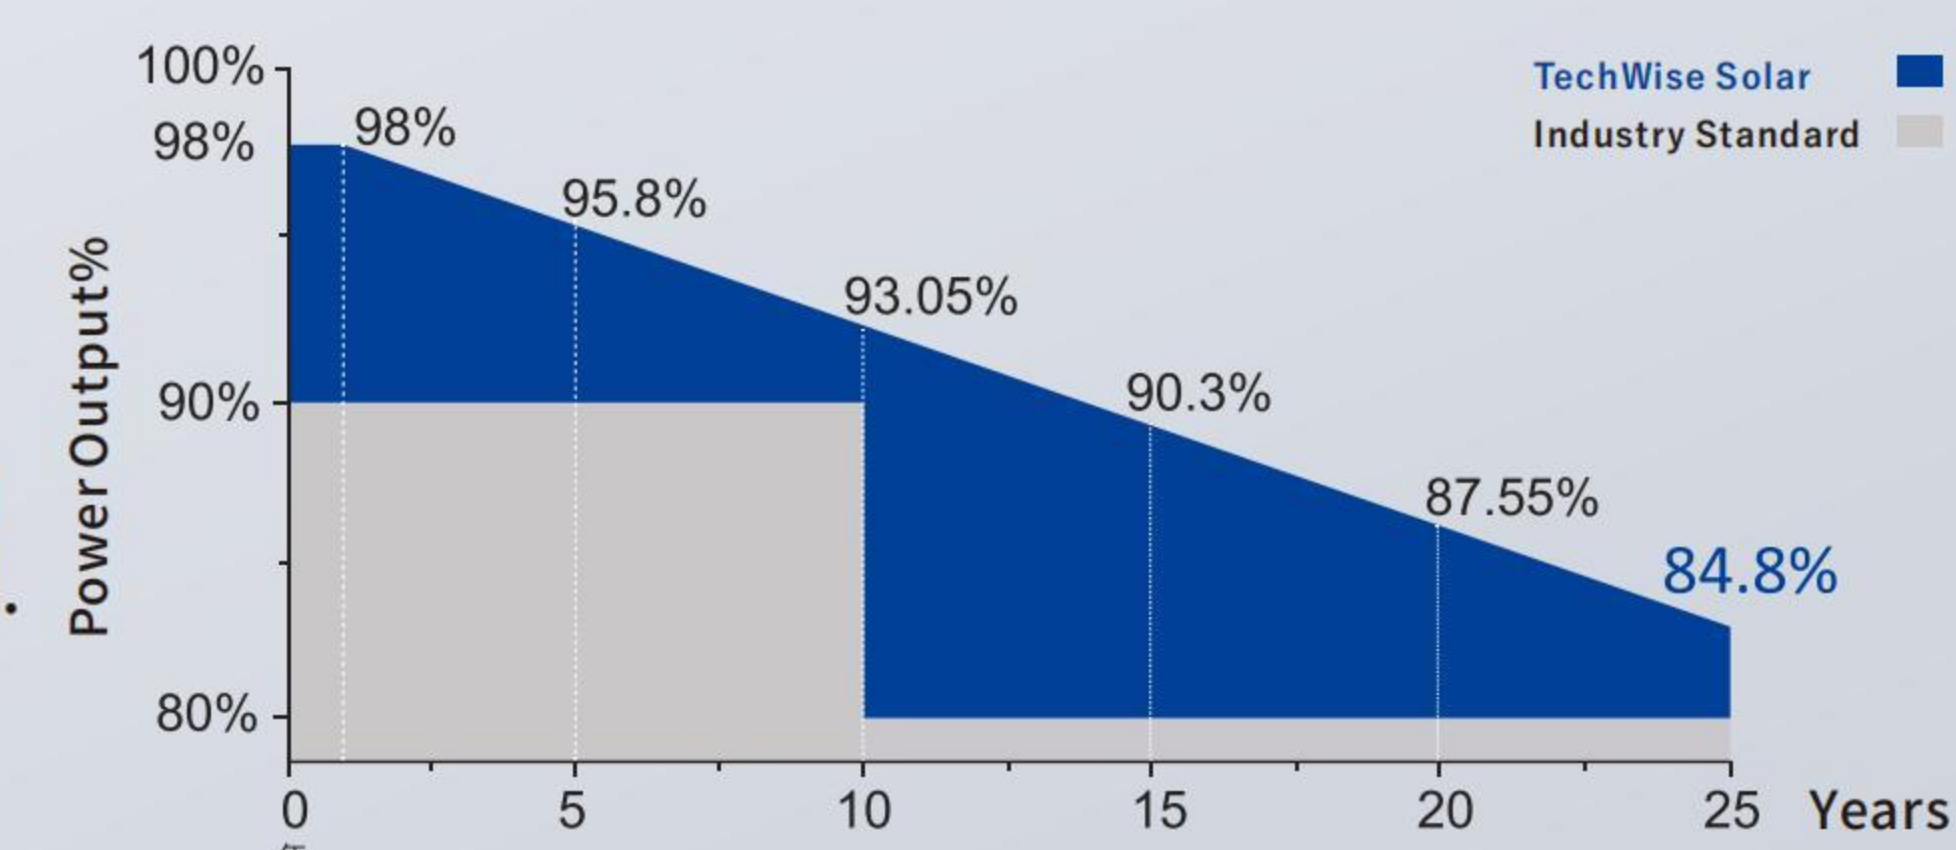

12 Years Product Warranty



25 Years Linear Power Warranty

TW-330HM

• Module Specification •

Cell Type	Mono crystalline
Cell Quantity	60cell
Cell Size (mm)	158.75*158.75
Module Size (mm)	1650*1002*35
Module Weight (kg)	18
Glass Thickness (mm)	3.2
Frame Material	Anodized aluminum alloy
Junction Box	IP68
Cable/Connector	4mm ² , MC4compatible
Cable Length	+300mm/-300mm; or Customize
Max System Volt (V)	1000V/1500V DC (IEC)
Max Fuse Rate (A)	15
Power Tolerance (%)	0~+3%

• Electrical Characteristics •

STC standard performance >>>

Power Level	310	315	320	325	330
Pmax(W)	310	315	320	325	330
Vmp(V)	32.80	33.00	33.20	33.40	33.60
Imp(A)	9.46	9.55	9.64	9.74	9.83
Voc(V)	40.00	40.20	40.40	40.60	40.80
Isc(A)	9.88	9.97	10.06	10.15	10.25
Module Efficiency (%)	18.75	19.05	19.36	19.66	19.96

NOCT standard performance >>>

Power Level	310	315	320	325	330
Pmax(W)	230	234	238	242	246
Vmp(V)	30.00	30.20	30.40	30.60	30.80
Imp(A)	7.67	7.75	7.83	7.91	7.99
Voc(V)	36.90	37.10	37.30	37.50	37.70
Isc(A)	8.00	8.08	8.15	8.22	8.30


STC: Irradiance 1000W/m², Module Temperature 25°C, AM1.5

NOCT: Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s



• Temperature Characteristics •

Operating Temp (°C)	-40~85
Operating Humidity (°C)	5~85
Hail Load Tolerance	25mm hailstone with velocity of 23m/s
Temp Coefficient	-0.35
Temp Coefficient Isc (%/°C)	0.05
Temp Coefficient Voc (%/°C)	-0.275
Operating Temp (°C)	44±2

• Engineering Drawings •

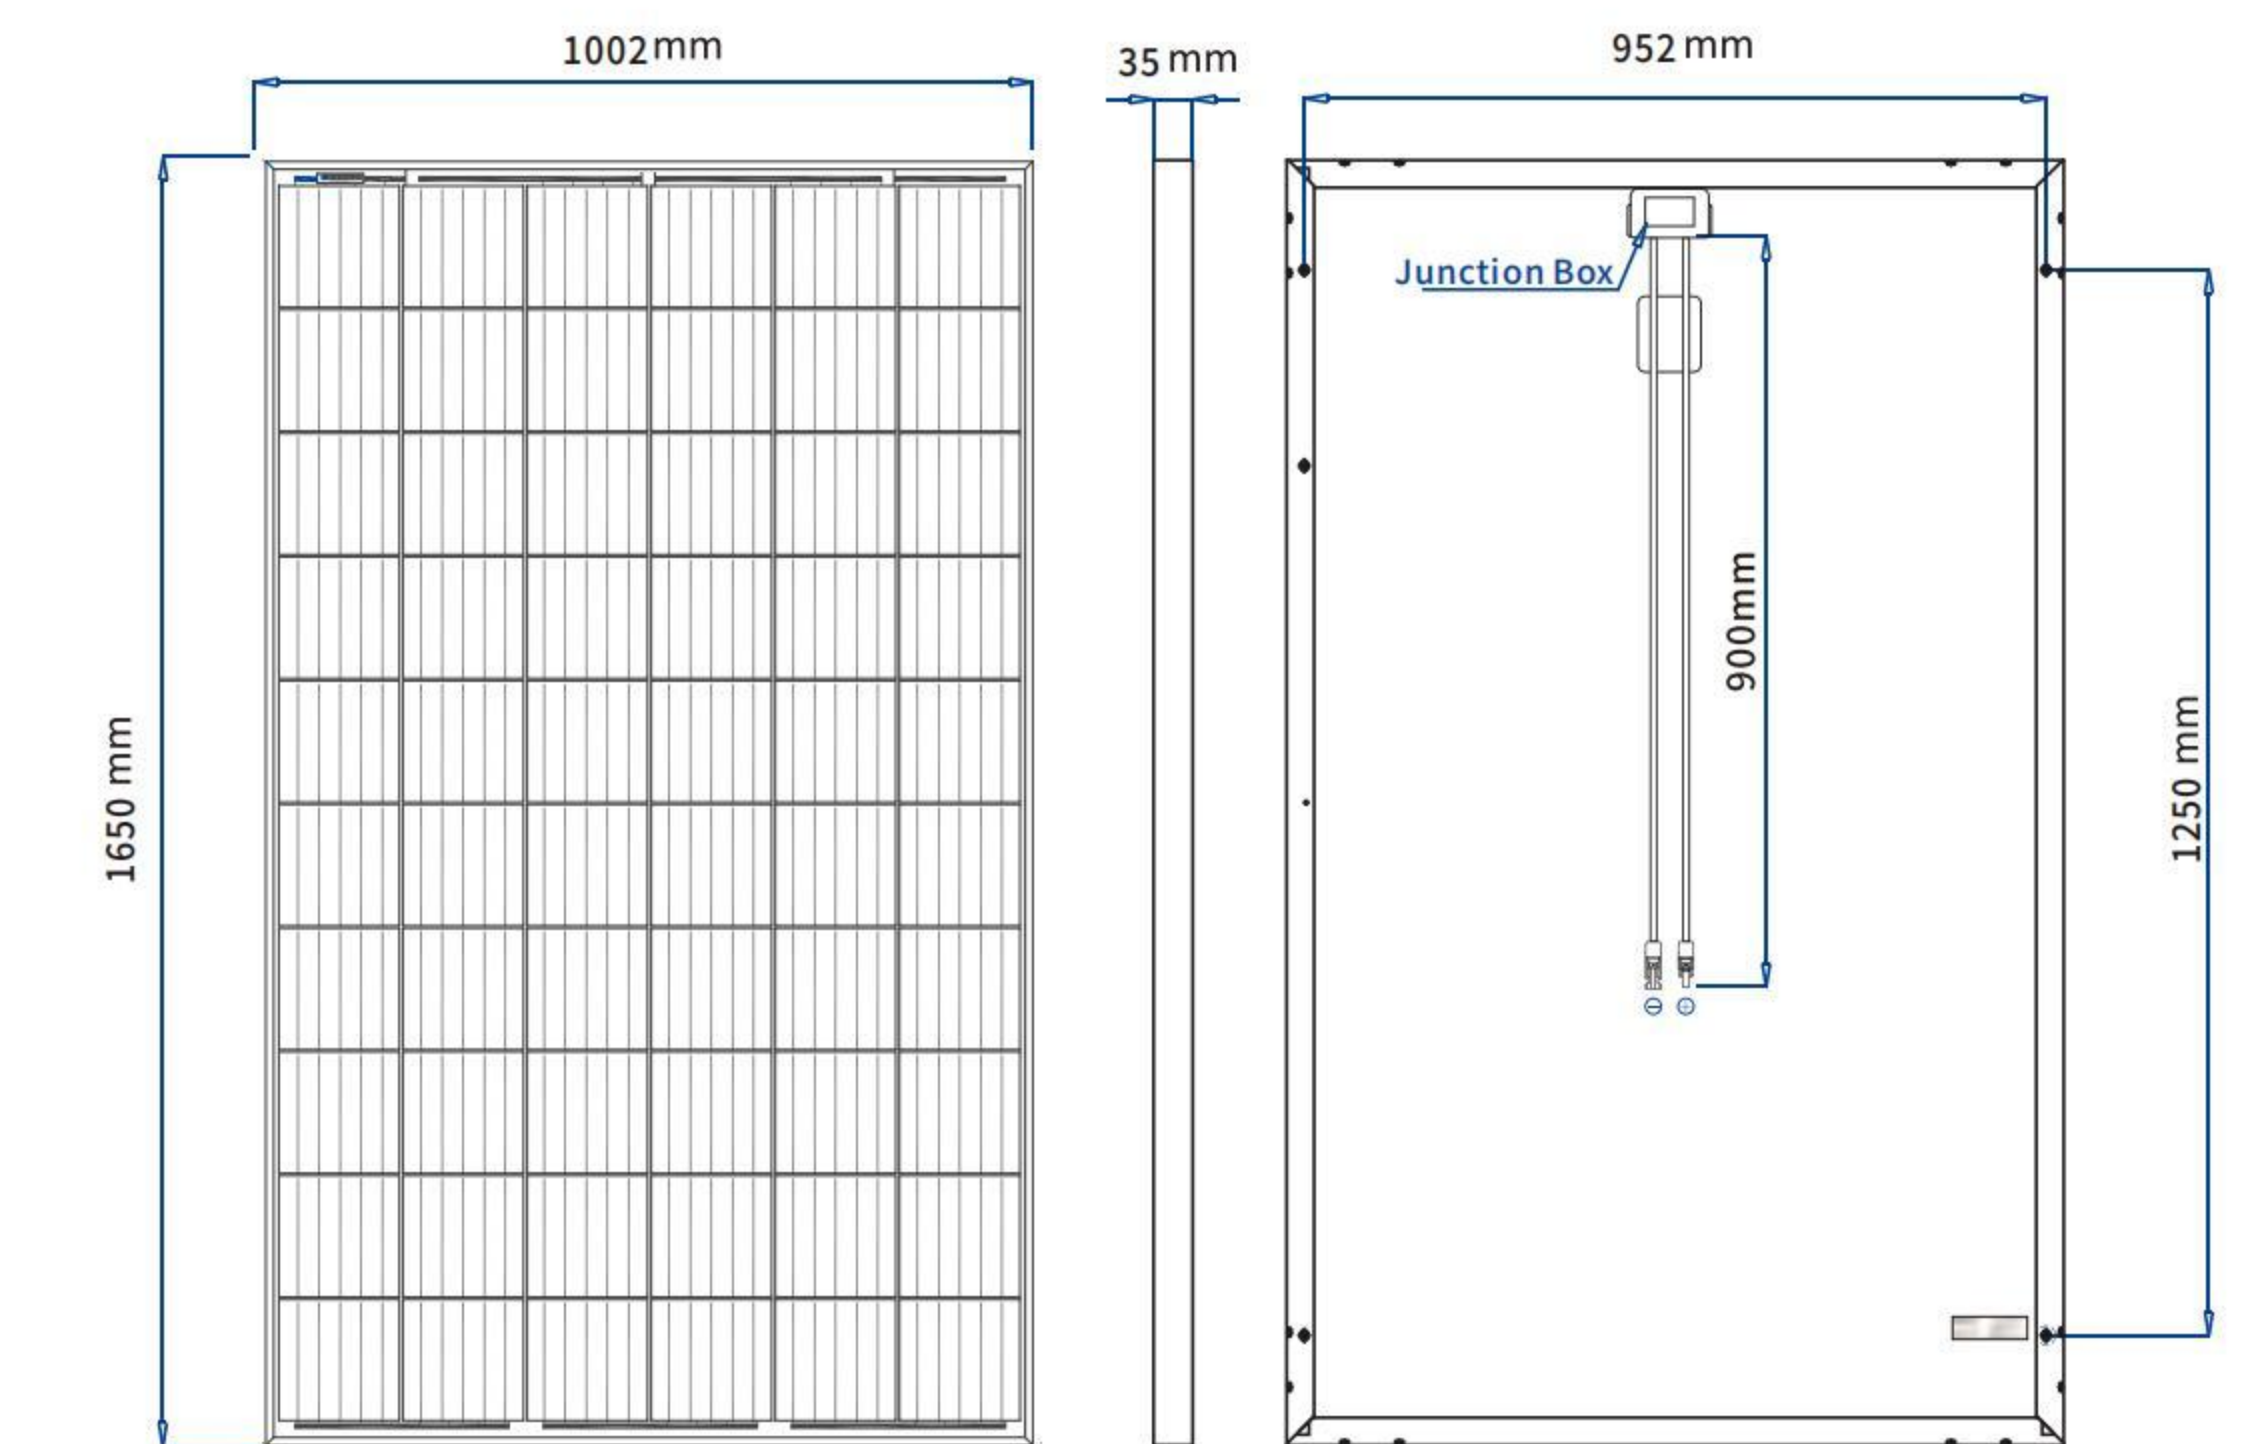

• I-V Curve •

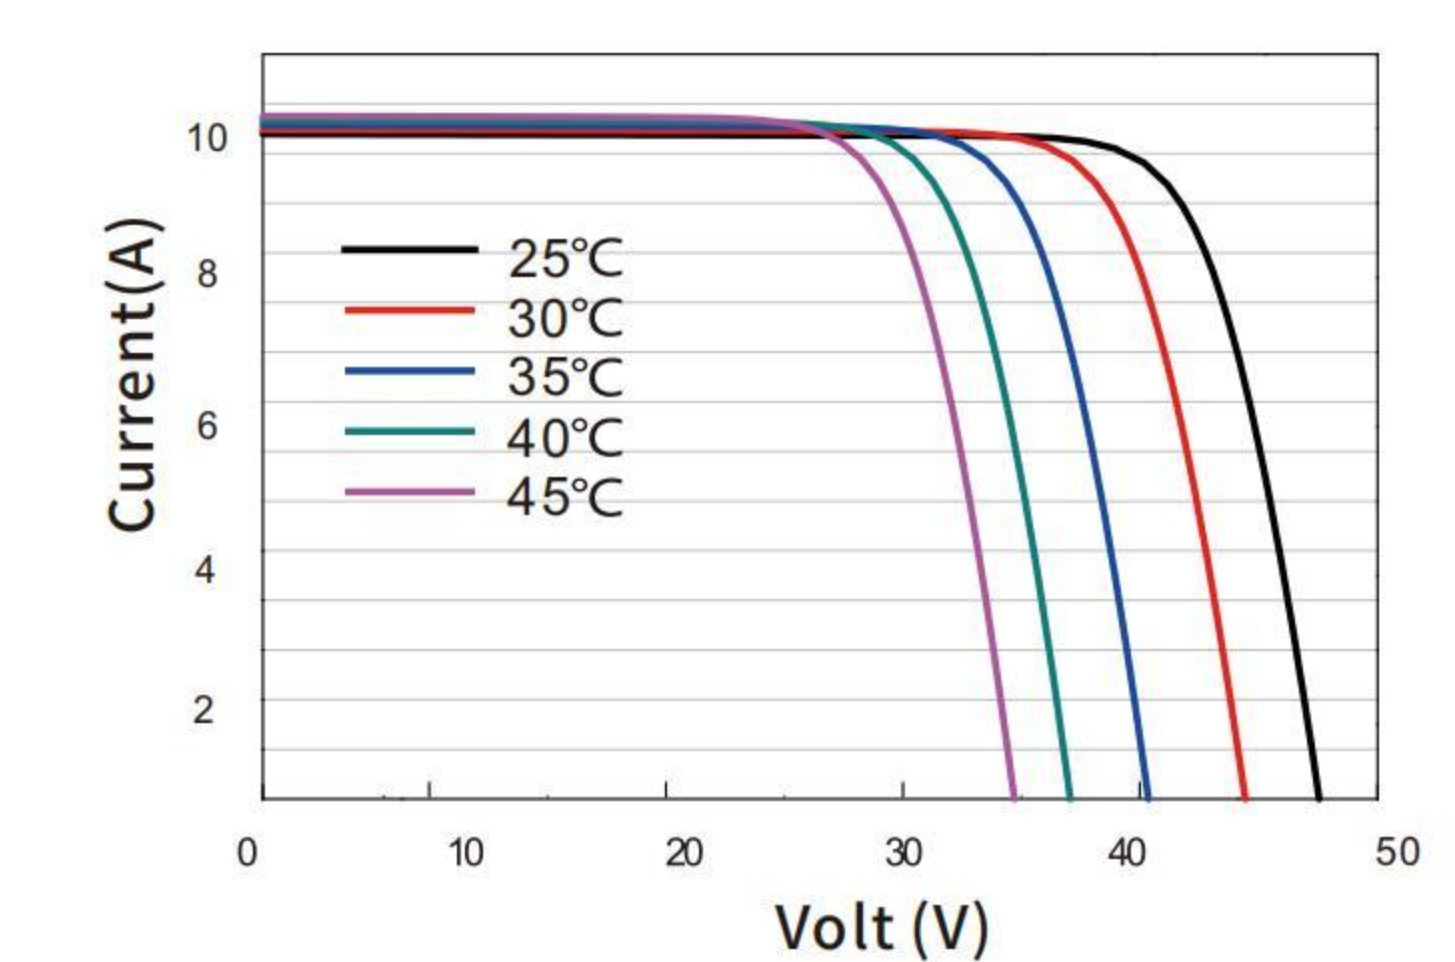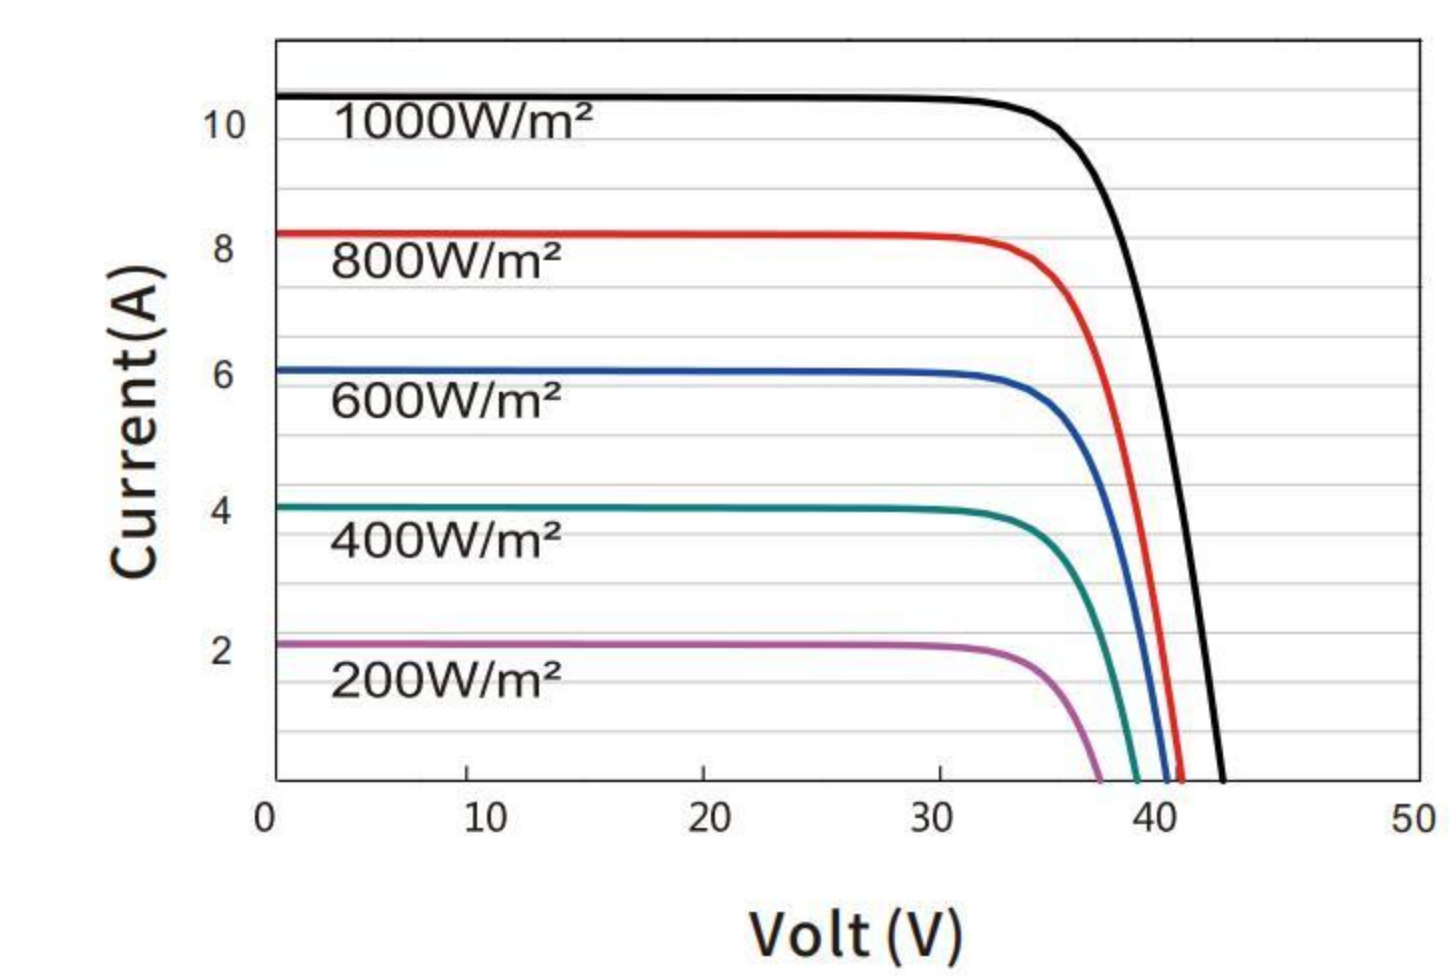

• Packaging Info •

Pieces per Pallet	37
Size of Packaging (mm)	-
Weight of per Pallet (kg)	-
Pieces per Container	952
Size of Container	40'HC



Add: Shangman Industrial Park, Caobu Town
Rudong County, Nantong City, Jiangsu Province, China
Tel: 86-513-81900128
Web: www.techwisesolar.com
Email: salesdept@techwisesolar.com

All data and specifications included in this brochure may subject to be modified without notice.
All Rights reserved by TechWise Solar Co.
(Feb 2023 V2 Edition)